



YCxxxPDF 72 M10/2

The best quality p-type mono cells and production process. Professional technology, reliable quality and power generation guarantee.



Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



High Power Density

High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



Half-cell Design

Less energy loss caused by shading due to new cell string layout and split J-box, and lower cell connection power loss due to half-cell design.



Bifacial Power

Bifacial panel, High generation revenue



Large size cell

The large cell design effectively increases module peak power and effectively reduces BOS costs, thereby reducing system costs.

21.1%

Module Efficiency

12YEAR

Product Warranty

0~+5W

Power tolerance


QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, ISO 9001:2015, ISO 14001:2015, ISO450012018


Linear Warranty

First year attenuation $\leq 2\%$, 2-30 year annual attenuation $\leq 0.45\%$

Linear Performance Warranty of YC Solar

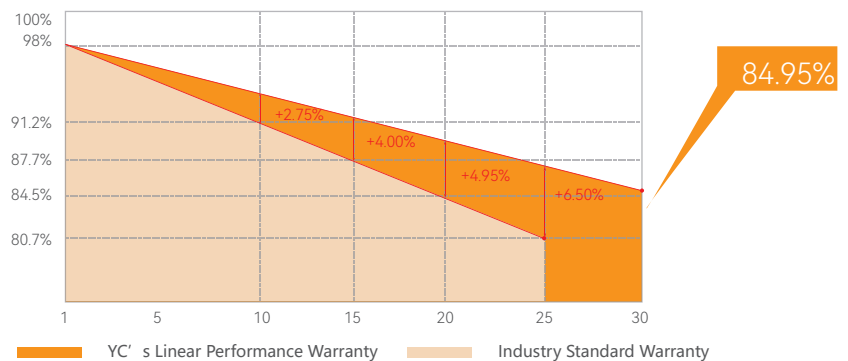

YCxxxPDF 72 M10/2产品

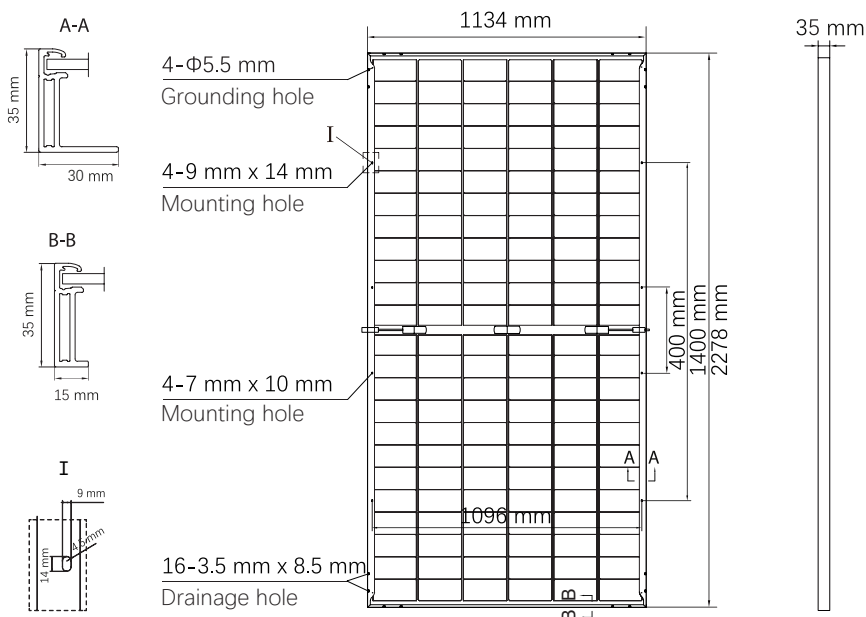

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

| Module type | YC xxx PDF 72 M10/2 (xxx=Pmax) | | | | | |
|-------------------------|--------------------------------|---|-------|-------|-------|-------|
| Power output | P_{max} | W | 530 | 535 | 540 | 545 |
| Power output tolerances | ΔP_{max} | W | 0/+5 | | | |
| Module efficiency | η_m | % | 20.50 | 20.70 | 20.90 | 21.10 |
| Voltage at Pmax | V_{mpp} | V | 41.60 | 41.76 | 41.93 | 42.10 |
| Current at Pmax | I_{mpp} | A | 12.74 | 12.81 | 12.88 | 12.95 |
| Open-circuit voltage | V_{oc} | V | 49.50 | 49.70 | 49.90 | 50.10 |
| Short-circuit current | I_{sc} | A | 13.48 | 13.57 | 13.66 | 13.73 |

STC: 1000W/m² irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.3% at 200W/m² according to EN 60904-1.
Max test power tolerance \pm 3%

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

| | | | | | | |
|-----------------------|-----------|---|-------|-------|-------|-------|
| Power output | P_{max} | W | 396.1 | 399.8 | 403.5 | 407.3 |
| Voltage at Pmax | V_{mpp} | V | 38.77 | 38.92 | 39.08 | 39.24 |
| Current at Pmax | I_{mpp} | A | 10.22 | 10.27 | 10.33 | 10.38 |
| Open-circuit voltage | V_{oc} | V | 46.78 | 46.97 | 47.16 | 47.34 |
| Short-circuit current | I_{sc} | A | 10.94 | 11.01 | 11.08 | 11.06 |


NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

OTHER INFORMATIONS


| | |
|------------------|----------------------------------------------------------------------------|
| Cell Orientation | 144 (24×6) |
| J-Box | IP68, three diodes |
| Cable | 4mm ² , positive 400mm/negative 200mm, length can be customized |
| Glass | Dual Glass, 2.0mm coated tempered glass |
| Frame | Anodized aluminum alloy |
| Weight | 32.4kg |
| Dimensions | 2278×1134×35mm |
| Packaging | 31 modules per pallet/20 pallets per 40' container |

Characteristic curve


I-V Curve

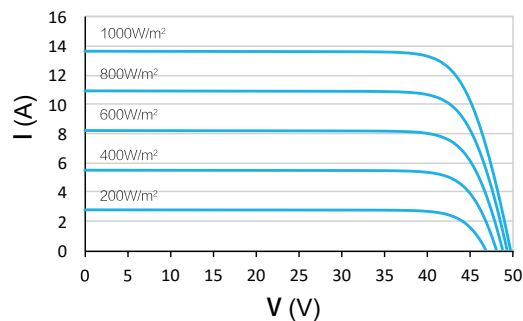

P-V Curve

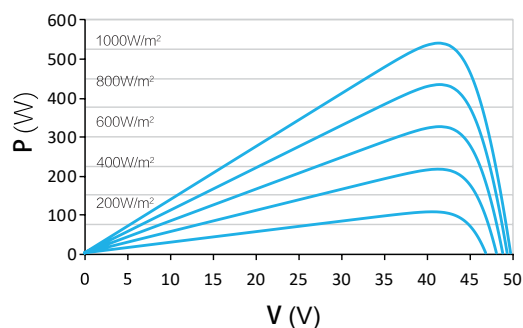

I-V Curve

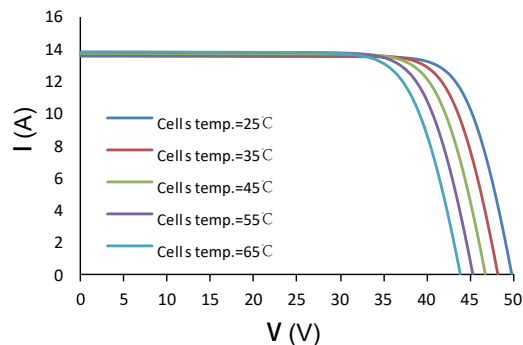

THERMAL CHARACTERISTICS

| | | | |
|---------------------------------|----------------|------|--------|
| Temperature coefficient of Pmax | γ | %/°C | -0.350 |
| Temperature coefficient of Voc | β_{Voc} | %/°C | -0.284 |
| Temperature coefficient of Isc | α_{Isc} | %/°C | +0.050 |

OPERATING CONDITIONS

| | |
|------------------------------------|---------------------|
| Operating temperature range | -40°C to 85°C |
| Power tolerance | 0 ~ +5W |
| Voc & Isc tolerance | \pm 3% |
| Max. system voltage | 1500V _{DC} |
| Max. series fuse rating | 30A |
| Nominal operating cell temperature | 45 \pm 2°C |
| Protection Class | Class II |
| Bifacial Rate | 70 \pm 5% |

DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection

MECHANICAL LOADING

| | |
|---------------------------------------------|------------|
| Max. static load, front (e.g., snow) | 5400Pa |
| Max. static load, back (e.g., wind) | 2400Pa |
| Max. hailstone impact (diameter / velocity) | 25mm/23m/s |



Warning: Read the Installation and User Manual in its entirety before handling, installing and operating YC Solar modules.