



**21.4%**  
Module Efficiency

**12YEAR**  
Product Warranty

**0~+5W**  
Power tolerance

**QUALIFICATIONS & CERTIFICATES**  
IEC 61215, IEC 61730, CE, ISO 9001:2015,  
ISO 14001:2015, ISO450012018



## YC xxx PDF 60 G12/2

The best quality p-type mono cells and production process.  
Professional technology, reliable quality and power generation guarantee.



### Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



### High Power Density

High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



### Half-cell Design

Less energy loss caused by shading due to new cell string layout and split J-box, and lower cell connection power loss due to half-cell design.



### Bifacial Power

Bifacial panel, High generation revenue




### Large size cell

The large cell design effectively increases module peak power and effectively reduces BOS costs, thereby reducing system costs.


### Linear Warranty

First year attenuation  $\leq 2\%$ , 2-30 year annual attenuation  $\leq 0.45\%$

Linear Performance Warranty of YC Solar

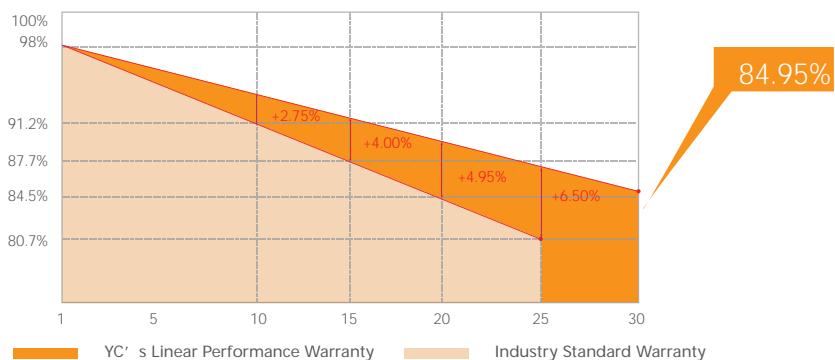

# YC xxx PDF 60 G12/2

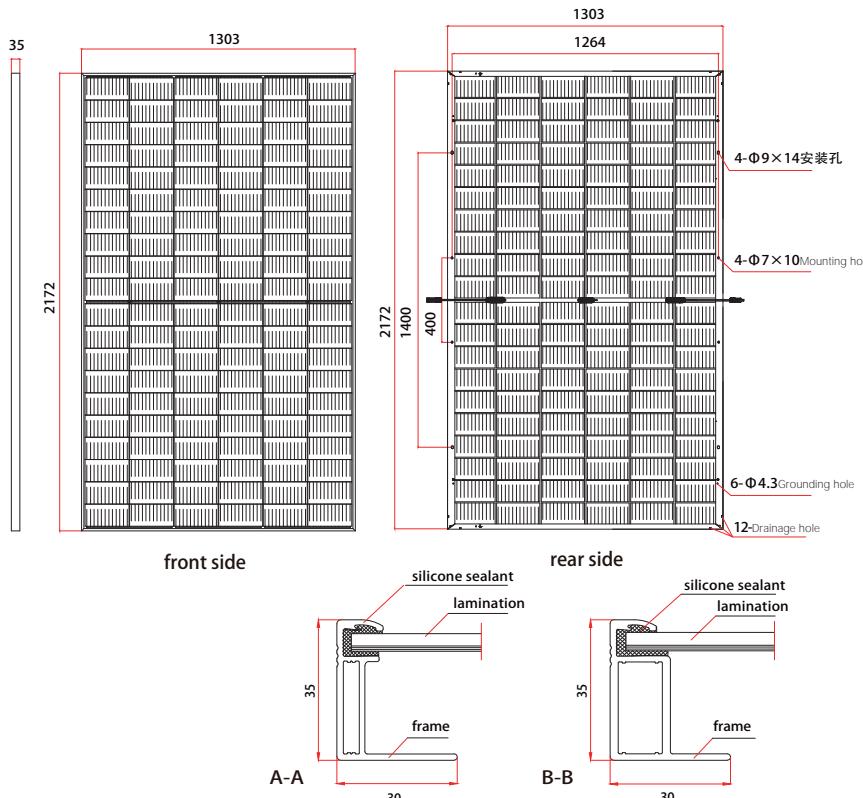

## ELECTRICAL PERFORMANCE

### Electrical parameters at Standard Test Conditions (STC)

Module type	YC xxx PDF 60 G12/2 (xxx=Pmax)							
Power output	P <sub>max</sub>	W	580	585	590	595	600	605
Power output tolerances	ΔP <sub>max</sub>	W	0/+5					
Module efficiency	η <sub>m</sub>	%	20.50	20.70	20.80	21.00	21.20	21.40
Voltage at Pmax	V <sub>mpp</sub>	V	33.80	34.00	34.20	34.40	34.60	34.80
Current at Pmax	I <sub>mpp</sub>	A	17.16	17.21	17.25	17.30	17.34	17.39
Open-circuit voltage	V <sub>oc</sub>	V	40.90	41.10	41.30	41.50	41.70	41.90
Short-circuit current	I <sub>sc</sub>	A	18.21	18.26	18.31	18.36	18.42	18.47

STC: 1000W/m<sup>2</sup> irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.

Average relative efficiency reduction of 3.3% at 200W/m<sup>2</sup> according to EN 60904-1.

Max test power tolerance ± 3%

### Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	P <sub>max</sub>	W	439	443	447	451	454	458
Voltage at Pmax	V <sub>mpp</sub>	V	31.50	31.70	31.90	32.00	32.20	32.37
Current at Pmax	I <sub>mpp</sub>	A	13.93	13.97	14.01	14.06	14.10	14.14
Open-circuit voltage	V <sub>oc</sub>	V	38.50	38.70	38.90	39.10	39.30	39.50
Short-circuit current	I <sub>sc</sub>	A	14.68	14.72	14.76	14.80	14.84	14.88

NOCT: open-circuit module operation temperature at 800W/m<sup>2</sup> irradiance, 20°C ambient temperature, 1m/s wind speed.

## OTHER INFORMATIONS


Cell Orientation	120 (20×6)
J-Box	IP68, three diodes
Cable	4mm <sup>2</sup> , positive 400mm/negative 200mm,length can be customized
Glass	Dual Glass,2.0mm coated tempered glass
Frame	Anodized aluminum alloy
Weight	35.3kg
Dimensions	2172×1303×35mm
Packaging	31 modules per pallet/18 pallets per 40' container




Warning: Read the Installation and User Manual in its entirety before handling, installing and operating YC Solar modules.

## Characteristic curve

I-V Curve (595W)

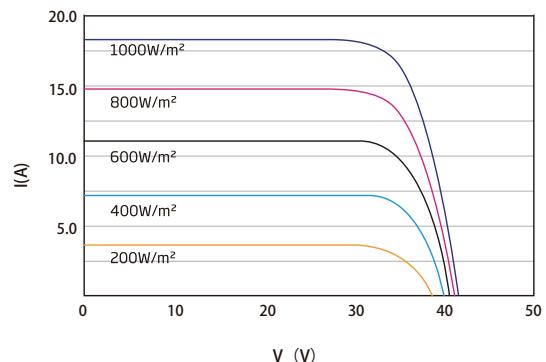

P-V Curve (595W)

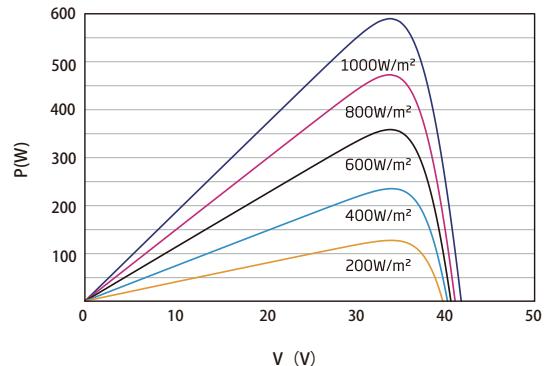

## THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45± 2
Temperature coefficient of Pmax	γ	%/°C	-0.350
Temperature coefficient of Voc	β <sub>Voc</sub>	%/°C	-0.284
Temperature coefficient of Isc	α <sub>Isc</sub>	%/°C	+0.050

## OPERATING CONDITIONS

Operating temperature range	-40°C to 85°C
Power tolerance	0 ~ +5W
Voc & Isc tolerance	±3%
Max. system voltage	1500V <sub>DC</sub>
Max. series fuse rating	35A
Nominal operating cell temperature	45±2°C
Protection Class	Class II
Bifacial Rate	70±5%

DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection

## MECHANICAL LOADING

Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm/23m/s