





# 440W

We're Star Solar. We believe that you deserve the best. From highpower solar modules to exceptional service, we shine for you.

- Powerful performance.
- More power output in shade or low-light conditions.
- Climate change ready. Performs well in extreme weather.
- Backed by an excellent 25/25 warranty and industry-leading customer care.

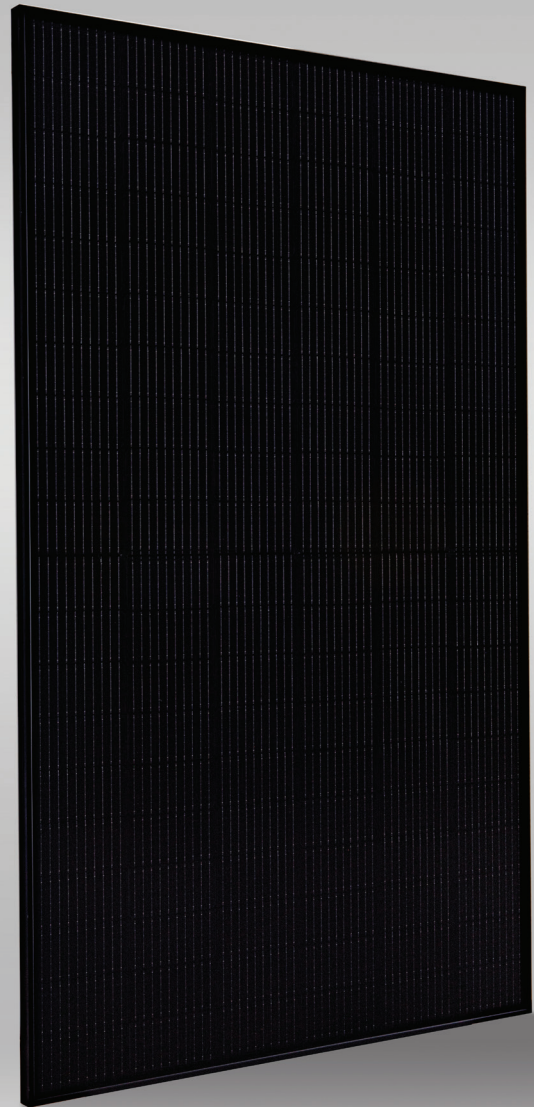

## Linear Performance Warranty

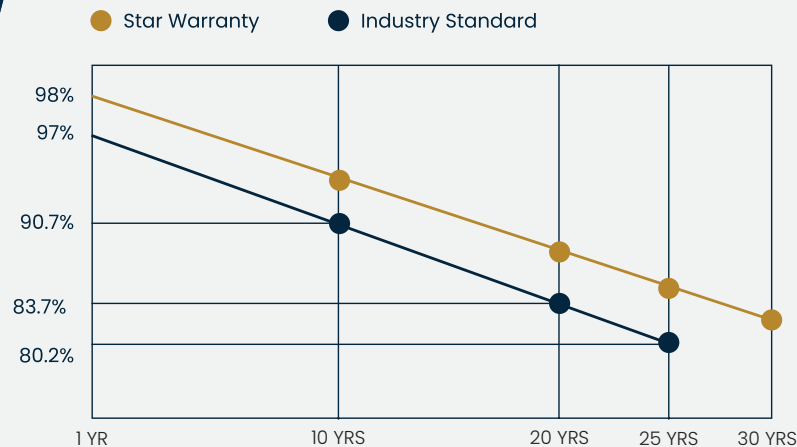

Live Brilliantly.

Engineer Drawing	Electrical Specifications																		
	<table border="0"> <tr> <td>STC Rated Output (Pmax)</td> <td>440W</td> </tr> <tr> <td>Module Efficiency (%)</td> <td>20.31%</td> </tr> <tr> <td>Open Circuit Voltage (Voc)</td> <td>41.2</td> </tr> <tr> <td>Short Circuit Current (Isc)</td> <td>13.54A</td> </tr> <tr> <td>Maximum Power Voltage (Vmp)</td> <td>34.5V</td> </tr> <tr> <td>Maximum Power Current (Imp)</td> <td>12.74A</td> </tr> </table>	STC Rated Output (Pmax)	440W	Module Efficiency (%)	20.31%	Open Circuit Voltage (Voc)	41.2	Short Circuit Current (Isc)	13.54A	Maximum Power Voltage (Vmp)	34.5V	Maximum Power Current (Imp)	12.74A						
STC Rated Output (Pmax)	440W																		
Module Efficiency (%)	20.31%																		
Open Circuit Voltage (Voc)	41.2																		
Short Circuit Current (Isc)	13.54A																		
Maximum Power Voltage (Vmp)	34.5V																		
Maximum Power Current (Imp)	12.74A																		
<h3>Test Operating Conditions</h3>																			
<table border="0"> <tr> <td>Max Series Fuse</td> <td>20A</td> </tr> <tr> <td>Max System Voltage</td> <td>1,500 VDC (UL&amp;IEC)</td> </tr> <tr> <td>Max Load Cap. (Per UL 1703)</td> <td>5400 PA Snow Load/210mph Wind Rating</td> </tr> <tr> <td>Fire Performance Class</td> <td>Class C/Type I</td> </tr> </table>		Max Series Fuse	20A	Max System Voltage	1,500 VDC (UL&IEC)	Max Load Cap. (Per UL 1703)	5400 PA Snow Load/210mph Wind Rating	Fire Performance Class	Class C/Type I										
Max Series Fuse	20A																		
Max System Voltage	1,500 VDC (UL&IEC)																		
Max Load Cap. (Per UL 1703)	5400 PA Snow Load/210mph Wind Rating																		
Fire Performance Class	Class C/Type I																		
<h3>Curve &amp; Temp Dependence</h3>																			
<h3 style="text-align: center;">Module Design</h3> <table border="0"> <tr> <td>Cell Type</td> <td>Mono 182x91mm</td> </tr> <tr> <td>Weight</td> <td>24kg</td> </tr> <tr> <td>Dimensions</td> <td>1910x1134x35mm</td> </tr> <tr> <td>Cables</td> <td>1200mm</td> </tr> <tr> <td>No. of Cells</td> <td>120 (6x20)</td> </tr> <tr> <td>Glass</td> <td>3.2mm high transmission, antireflection coating</td> </tr> <tr> <td>Junction Box</td> <td>IP68, 3 bypass diodes</td> </tr> <tr> <td>Connector</td> <td>MC4</td> </tr> <tr> <td>Packing</td> <td>31pcs/pallet, 744pcs/40HQ</td> </tr> </table>	Cell Type	Mono 182x91mm	Weight	24kg	Dimensions	1910x1134x35mm	Cables	1200mm	No. of Cells	120 (6x20)	Glass	3.2mm high transmission, antireflection coating	Junction Box	IP68, 3 bypass diodes	Connector	MC4	Packing	31pcs/pallet, 744pcs/40HQ	<p style="text-align: center;">STAR-4040W-M60H-M10</p>
Cell Type	Mono 182x91mm																		
Weight	24kg																		
Dimensions	1910x1134x35mm																		
Cables	1200mm																		
No. of Cells	120 (6x20)																		
Glass	3.2mm high transmission, antireflection coating																		
Junction Box	IP68, 3 bypass diodes																		
Connector	MC4																		
Packing	31pcs/pallet, 744pcs/40HQ																		
<h3>Temperature Ratings</h3>																			
<table border="0"> <tr> <td>Temperature Coefficients Pmax</td> <td>-0.37°C</td> </tr> <tr> <td>Temperature Coefficients Isc</td> <td>+0.05°C</td> </tr> <tr> <td>Temperature Coefficients VocNormal Op- erating Cell Temperature (NOCT)</td> <td>-0.29°C 45°C±2°C</td> </tr> </table>		Temperature Coefficients Pmax	-0.37°C	Temperature Coefficients Isc	+0.05°C	Temperature Coefficients VocNormal Op- erating Cell Temperature (NOCT)	-0.29°C 45°C±2°C												
Temperature Coefficients Pmax	-0.37°C																		
Temperature Coefficients Isc	+0.05°C																		
Temperature Coefficients VocNormal Op- erating Cell Temperature (NOCT)	-0.29°C 45°C±2°C																		
<h3>Certifications</h3>																			
<table border="0"> <tr> <td rowspan="3"> </td> <td>UL61730-1/-2</td> </tr> <tr> <td>UL61215-1/-2</td> </tr> <tr> <td>CSA C22.2#61730-1/-2</td> </tr> </table>			UL61730-1/-2	UL61215-1/-2	CSA C22.2#61730-1/-2														
	UL61730-1/-2																		
	UL61215-1/-2																		
	CSA C22.2#61730-1/-2																		