

PCS

Multi-level fan speed, wide operating temperature
 Support multi-PCS parallel, Maximum to 8pcs parallel together
 Support mode shifting of on and off grid
 With PQ, VF, SVG VSG, support high / low voltage crossing



PCS Application Scenario


High altitude



High temperature, windy and sand



High salt coast

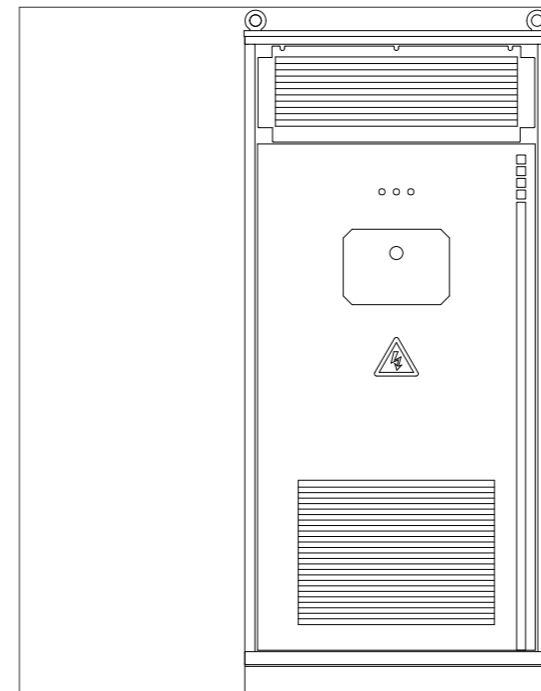

Product Model	HD08PCS1725
Operating voltage range (V)	1000-1500
Operating current range (A)	≤1936
Rated AC power (KW)	1725
Maximum AC power (KW)	1897
Rated output voltage (V)	690
Dimensions (W * D *H)	1050*1500*2377mm
Weight	1.5T
Communication	CAN/RS485/Ethernet
Product Model	HD06PCS1375
Operating voltage range (V)	800-1500
Operating current range (A)	≤1936
Rated AC power (KW)	1375
Maximum AC power (KW)	1513
Rated output voltage (V)	550
Dimensions (W * D *H)	1050*1500*2377mm
Weight	1.5T
Communication	CAN/RS485/Ethernet