

SCAN CODE TO  
WATCH VIDEO




Learn more about the  
production of 182mm  
Mono PV Module

# SKT385~410M10

## 385~410 Watt

182mm 108Cells All Black Single Glass Bifacial  
Mono Half Cell PV Module Series

Sunket Linear Warranty

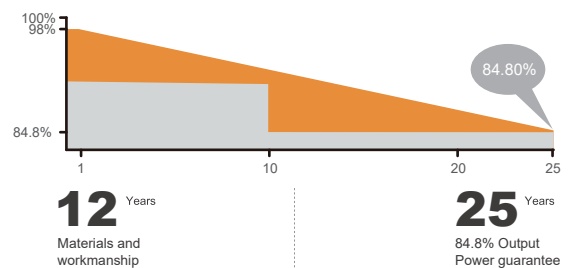

MBB PERC  
Half Cut Cell



Excellent Low-light  
Performance



100% Inspection  
Guarantee Reliability



Anti PID





5400Pa  
Strengthened  
Mechanical Load



High Density  
Packaging



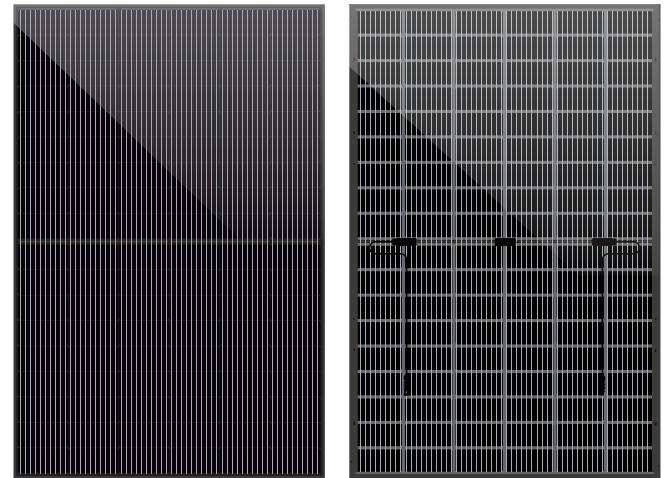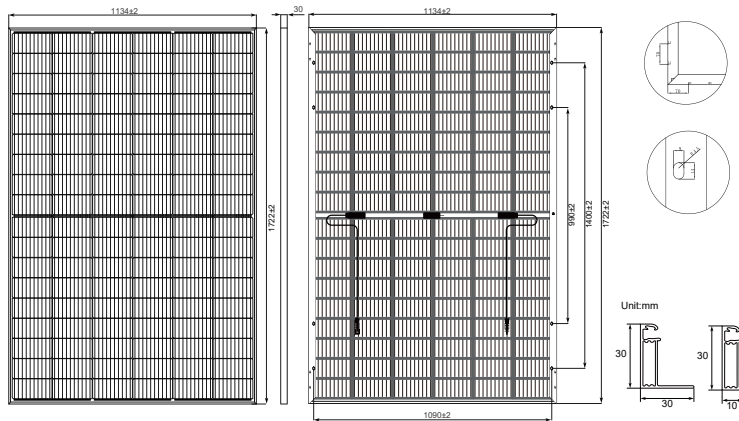

All Dimensions in mm  
The above drawing is a graphical representation of the product.  
For engineering quality drawings please contact SUNKET.

## Electrical Characteristics (STC/NOCT)

Module Type	SKT385M10		SKT390M10		SKT395M10		SKT400M10		SKT405M10		SKT410M10	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	385	290	390	294	395	298	400	302	405	306	410	310
Open Circuit Voltage - Voc(V)	36.76	34.49	36.85	34.62	36.98	34.75	37.07	34.88	37.23	35.12	37.32	35.23
Short- Circuit Current - Isc(A)	13.53	10.82	13.61	10.89	13.70	10.96	13.79	11.03	13.87	11.10	13.95	11.16
Voltage at Pmax -Vmp(V)	30.44	28.67	30.64	28.87	30.84	29.08	31.01	29.27	31.21	29.48	31.45	29.73
Current at Pmax - Imp(A)	12.65	10.12	12.73	10.19	12.81	10.25	12.90	10.32	12.98	10.38	13.04	10.43
Module Efficiency -ηm(%)	19.8	/	20.0	/	20.2	/	20.5	/	20.8	/	21.0	/
Power Tolerance(W)	(0, +4.99W)											
Maximum System Voltage(V)	1500Vdc (IEC / UL)											
Maximum Series Fuse Rating (A)	25A											

STC : Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

## Mechanical Specifications

External Dimensions	1722x1134x30mm
Weight	20.5kg
Solar Cells	Mono crystalline 182mm (2x54pcs)
Front Glass	AR Coated 3.2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm <sup>2</sup> , 1200mm (+), 1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

## Packing Configuration

	1722x1134x30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	6	26
Pieces per Container	216	936

## Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.275%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

## Current-Voltage & Power-Voltage Curves (SKT410M10)

