

An ideal support structure for


solar panels on flat surfaces


KIT NO-FLEX CONNECT

THE NEW SOLUTION FOR LARGE PANELS


NO-FLEX Connect is a Sun Ballast accessory designed to be inserted on central reinforcement ballasts in order to support large panels and prevent them from bending in the middle.

Its "L" shape is designed to be compatible with all inclinations of Connect Sun Ballast systems, from 5° to 30° , with panels laid horizontally.

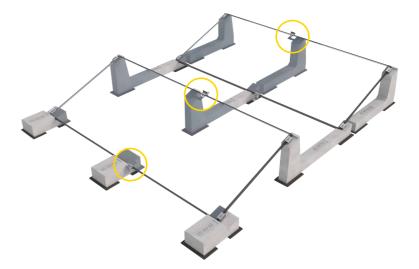




Item	Material	Thickness	Weight
K23711	Steel	30/10	120g
Plate	Bolt	Washer	Cage nut
<u>}</u>			2021

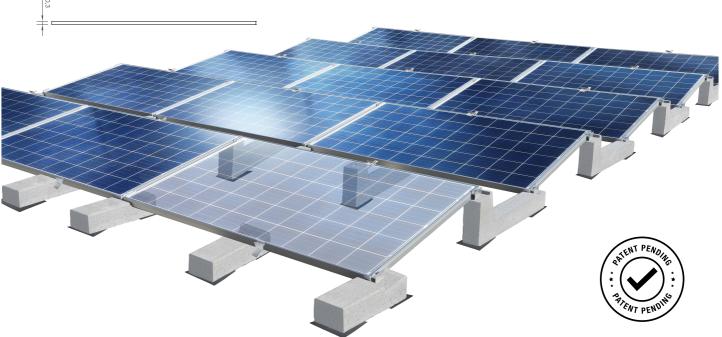

In accordance with the law, we reserve ownership of this design and prohibit any unauthorized reproduction or communication to third parties.



solar panels on flat surfaces

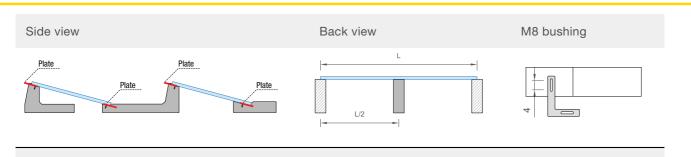

USE THE 4CM SLOT TO FIX THE PLATE ON THE CENTRAL REINFORCEMENT BALLASTS

CONNECT SYSTEMS 5°-10°-15°;; Panel width from 980mm to 1150mm **CONNECT SYSTEM 20°-30°;;** Panel width from 980mm to 1050mm

View of the Connect and No-Flex system from above

The 6 support points to which the panel is attached are indicated in red

