


## 30° CONNECT SYSTEM

### ART. 230030.CF/.CR/.CRT

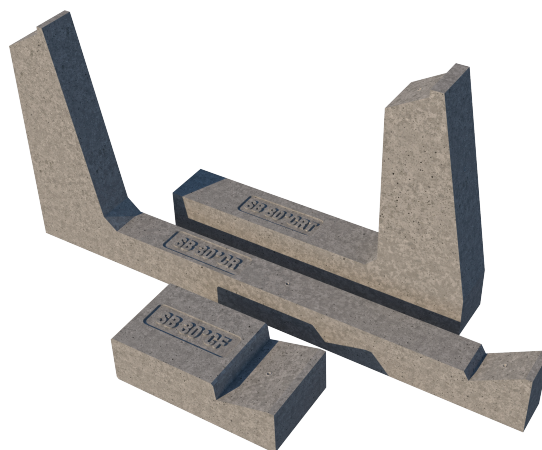

<b>Material</b>	the main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
<b>Application</b>	any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements		
<b>Inclination angle</b>	30°	<b>Distance between modules</b>	Fixed distance
<b>Module positioning</b>	horizontal		

#### Front Ballast Art. 23030.CF

<b>Ballast weight</b>	20 kg	<b>Pallet dimensions</b>	86 cm x 86 cm h = 60 cm
<b>Quantity for pallet</b>	30 Pieces	<b>Pallet weight</b>	600 kg

#### Central Ballast Art. 23030.CR

<b>Ballast weight</b>	45 kg	<b>Pallet dimensions</b>	125 cm x 69 cm h = 58 cm
<b>Quantity for pallet</b>	12 Pieces	<b>Pallet weight</b>	540 kg


#### Terminal Ballast Art. 23030.CRT

<b>Ballast weight</b>	45 kg	<b>Pallet dimensions</b>	75 cm x 65 cm h = 84 cm
<b>Quantity for pallet</b>	12 Pieces	<b>Pallet weight</b>	540 kg

## SYSTEM DETAILS

### HORIZONTAL PANEL LAYING

Side view

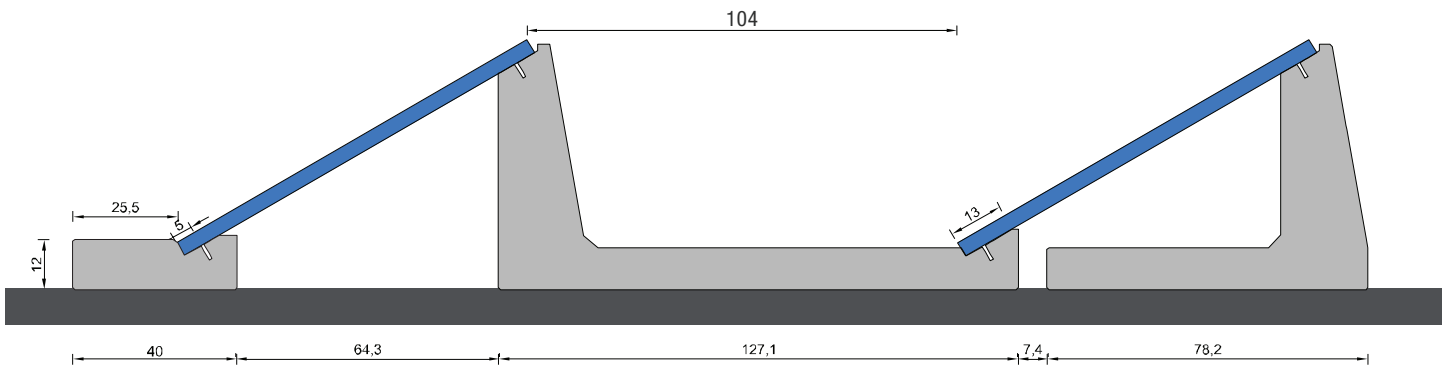

Top view



#### INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.
- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 1m it is advisable to consult our technical department.
- For any information visit the website [www.sunballast.it](http://www.sunballast.it)