


# NON-PENETRATED ROOF MOUNTING SYSTEM

## Design Conditions

- Application: Metal roof
- Building height: 20M
- Wind speed: Up to 64m/s
- Snow load: 100cm
- PV module: Framed/unframed
- Layout way: Landscape/portrait
- Elevation angle: Flushed with the roof
- Material: 6005-T5+SUS304
- Standard: AS/NZS 1170.2:2011, JIS C 8955:2017, EN 1090
- Warranty: 10years
- Surface treatment: Anodizing

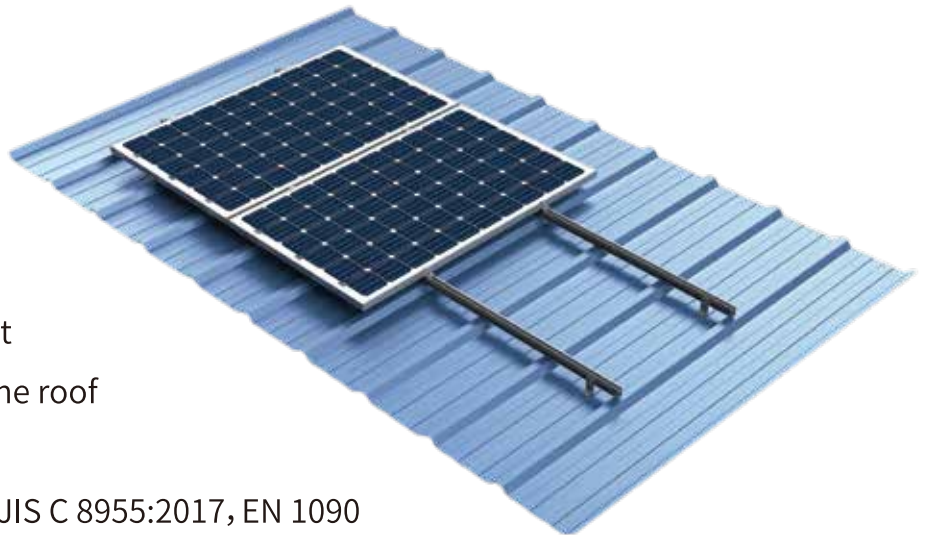

Mid Clamp



End Clamp



Rail



406 Kliplok (Small)



700 Kliplok (Small)