


5° SAIL-SHAPED CONNECT SYSTEM

ART. 23005.CF/.CRC/.CRR/.CRTT

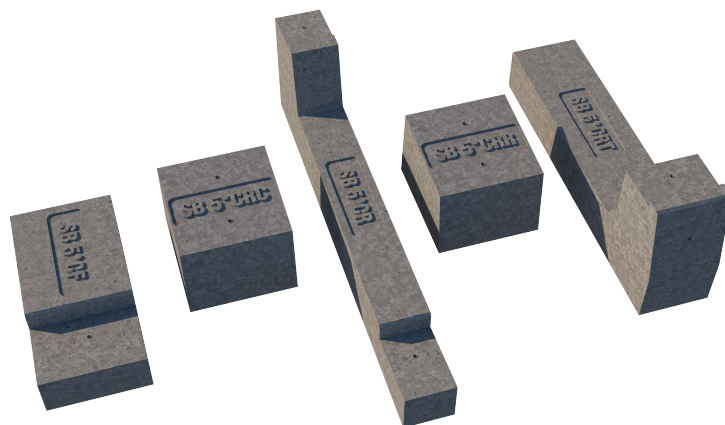

| | | | |
|---------------------------|--|---------------------------------|----------------|
| Material | The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions | | |
| Application | Any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements | | |
| Inclination angle | 5° | Distance between modules | Fixed distance |
| Module positioning | Horizontal | | |

Front Ballast Art. 23005.CF

| | | | |
|----------------------------|-----------|--------------------------|-----------------------|
| Ballast weight | 20 kg | Pallet dimensions | 70cm x 98cm h = 85 cm |
| Quantity for pallet | 32 Pieces | Pallet weight | 640 kg |

Central Ballast Art. 23005.CRC

| | | | |
|----------------------------|-----------|--------------------------|-----------------------|
| Ballast weight | 20 kg | Pallet dimensions | 88cm x 65cm h = 57 cm |
| Quantity for pallet | 24 Pieces | Pallet weight | 480 kg |

Central Ballast Art. 23005.CRR

| | | | |
|----------------------------|-----------|--------------------------|-----------------------|
| Ballast weight | 28 kg | Pallet dimensions | 88cm x 65cm h = 57 cm |
| Quantity for pallet | 18 Pieces | Pallet weight | 504 kg |


Terminal Ballast Art. 23005.CRTT

| | | | |
|----------------------------|-----------|--------------------------|------------------------|
| Ballast weight | 33 kg | Pallet dimensions | 90 cm x 98 cm h= 45 cm |
| Quantity for pallet | 24 Pieces | Pallet weight | 792 kg |

SYSTEM DETAILS

HORIZONTAL PANEL LAYING

Side view

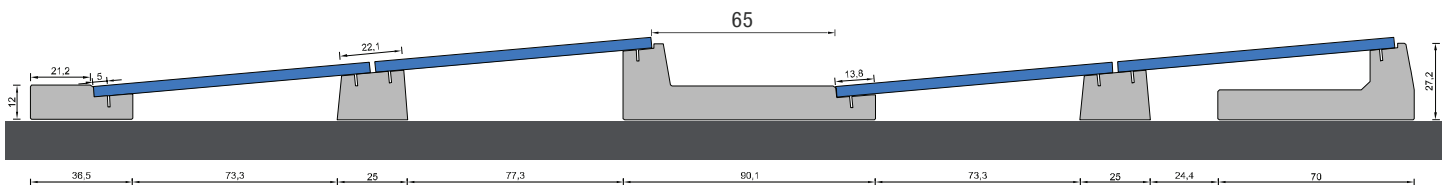

Top view



INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.
- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 1m it is advisable to consult our technical department.
- For any information visit the website www.sunballast.it