


20° CONNECT SYSTEM

ART. 230020.CF/.CR/.CRT

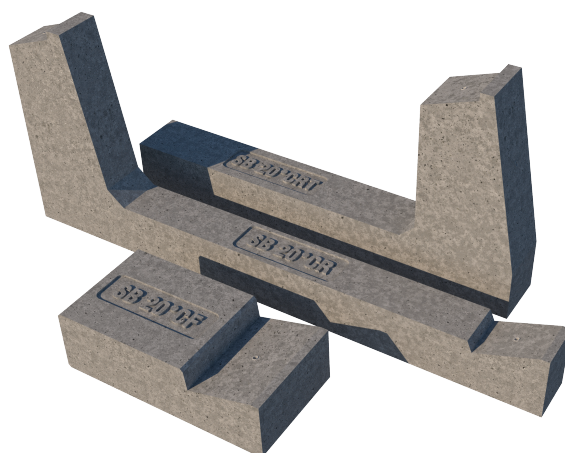

Material	The main material of SUN BALLAST is concrete, which allows a low wear over time and the ability to withstand even the most intense perturbations and different climatic conditions		
Application	Any type of flat roof with a maximum slope of 5 ° on the ground, on beaten ground with inert material or pavements		
Inclination angle	20°	Distance between modules	Fixed distance
Module positioning	Horizontal		

Front Ballast Art. 23020.CF

Ballast weight	22 kg	Pallet dimensions	70 cm x 98 cm h = 52 cm
Quantity for pallet	30 Pieces	Pallet weight	660 kg

Central Ballast Art. 23020.CR

Ballast weight	33 kg	Pallet dimensions	90 cm x 86 cm h = 64 cm
Quantity for pallet	18 Pieces	Pallet weight	594 kg


Terminal Ballast Art. 23020.CRT

Ballast weight	35 kg	Pallet dimensions	70 cm x 98 cm h = 70 cm
Quantity for pallet	16 Pieces	Pallet weight	560 kg

SYSTEM DETAILS

HORIZONTAL PANEL LAYING

Side view

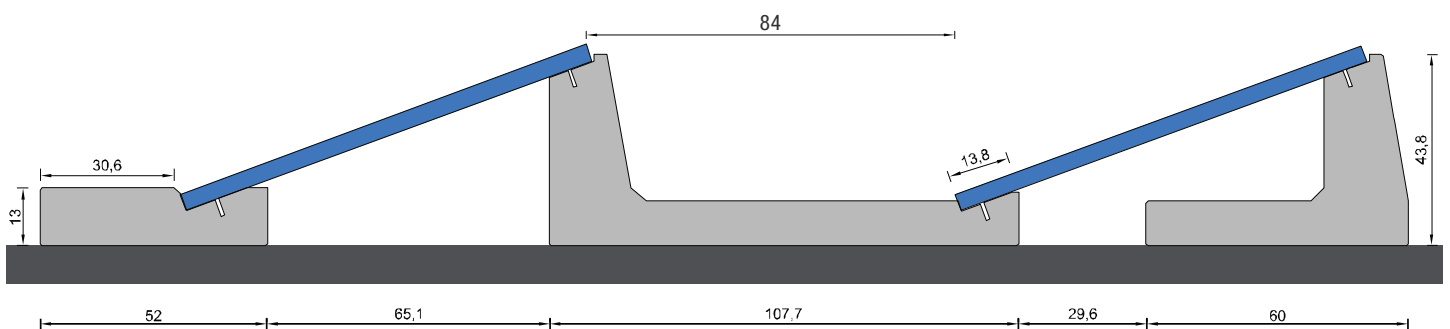

Top view



INFO

- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm
- Avoid screwdrivers impulse
- It's recommended to consult the information indicated in the assembly instructions of the panel manufacturer
- Always follow Sun Ballast assembly instructions.
- The dimensions shown in the figure are all expressed in centimeters.
- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 1m it is advisable to consult our technical department.
- For any information visit the website www.sunballast.it