


# BDM-2000 MICROINVERTER



## Features

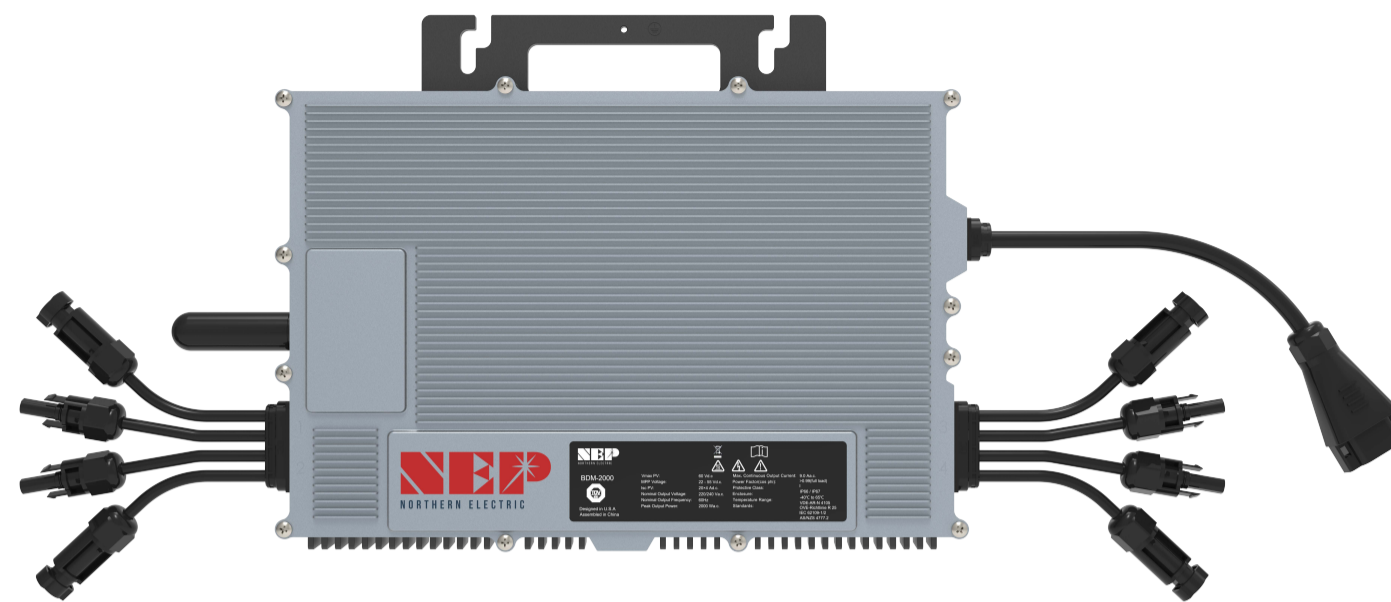

- U.S. California Rule 21 Certified
- Low cost \$/watt micro inverter
- Built-in WiFi for remote monitoring





- High continuous output power up to 2000Wac, recommended for four max 700W solar panel
- High efficiency with 96.5% CEC



- Globally certified for UL1741, SAA, TUV, VDE-AR-N 4105, VDE 0126, G83/2, CEL 021, IEC61727, EN50438, TOR Erzeuger Typ A
- Integrated grounding for easy installation




- NEMA-6/IP-66/IP-67 enclosure rating
- Can connect with BDM-1600, BDM-1200, BDM-1000, BDM-800, BDM-600 (aka BDM-300X2), BDM300 and BDM-250

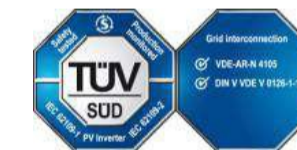


## Important product information

- NEP is committed to developing Clean, Affordable, Reliable and Efficient (CARE) products for our customers worldwide.
- NEP microinverters have an isolation transformer and basic isolation between the DC input and the AC output network.

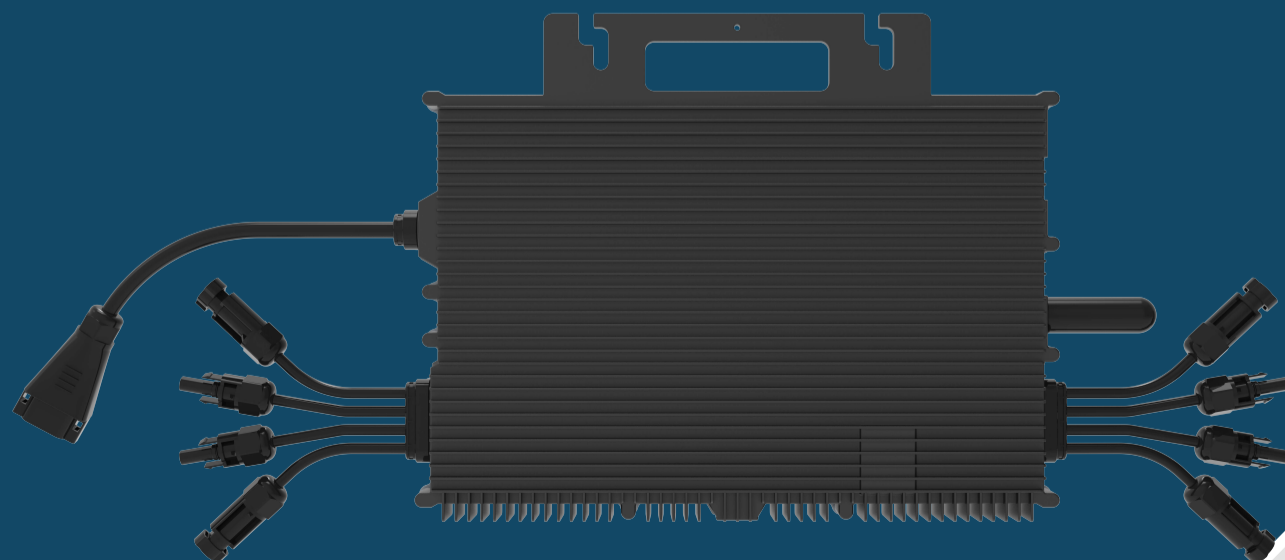



# BDM-2000 MICROINVERTER

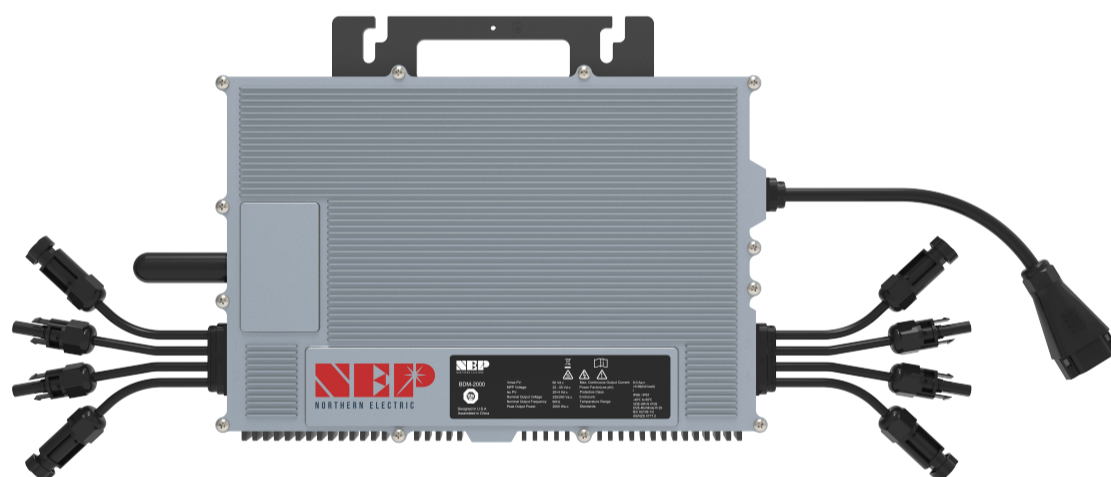

INPUT(DC)	Recommended Max PV Power (Wp)	750 x 4			
	Max DC Open Circuit Voltage (Vdc)	60			
	Max DC Input Current (Adc)	18 x 4			
	MPPT Tracking Accuracy	99.9%			
	MPPT Tracking Range (Vdc)	22-55			
	Isc PV (absolute maximum) (Adc)	20 x 4			
OUTPUT (AC)	Maximum Inverter Backfeed Current to the Array (Adc)	0			
	Peak AC Output Power (Wp)	2000			
	Nominal Power Grid Voltage (Vac)	220	240	208	
	Allowable Power Grid Voltage (Vac)	180-275*	180-275*	180-275*	
	Allowable Power Grid Frequency (Hz)	50/45-55	60/55-65	60/55-65	
	THD	<3% (at rated power)			
	Power Factor (cos phi, fixed)	>0.99(at rated power)			
	Max Output Current (Aac)	9.0	8.33	9.62	
	Current (inrush)(Peak and Duration)	24A, 15us			
	Nominal Frequency (Hz)	60	60	50	
	Maximum Output Fault Current (Aac)	18.0A peak			
	Maximum Output Overcurrent Protection (Aac)	18			
	Maximum Number of Units Per Branch (12AWG) (All NEC adjustment factors have been considered)	1	1	1	
	SYSTEM EFFICIENCY	Peak Efficiency	97.20%		
		Night Time Tare Loss (Wp)	0.11		
PROTECTION FUNCTIONS	Over/Under Voltage Protection	Yes			
	Over/Under Frequency Protection	Yes			
	Anti-Islanding Protection	Yes			
	Over Current Protection	Yes			
	Reverse DC Polarity Protection	Yes			
	Overload Protection	Yes			
	Protection Degree	NEMA-6 / IP-66 / IP-67			
	Ambient Temperature	-40°F to +149°F (-40°C to +65°C)			
	Operating Temperature	-40°F to +185°F (-40°C to +85°C)			
	Display	LED LIGHT			
	Communications(Wifi)	Frequency: 2.4 Ghz Standards: IEEE 802.11/b/g/n			
	Dimension (W-H-D)	11.81"x9.18"x1.50"(300x233x38 mm)			
	Weight	11.76 lbs. (5.33 kg)			
	Environment Category	Indoor and outdoor			
	Wet Location	Suitable			
	Pollution Degree	PD 3			
	Overvoltage Category	II(PV), III (AC MAINS)			
	Product Safety Compliance	IEC/EN 62109-1	California Rule 21 certified UI1741 CSA C22.2 No.107.1		
IEC/EN 62109-2					
Grid Code Compliance* (Refer to the label for the detailed grid code compliance)	VDE-AR-N 4105* VDEV0126-1-1/A1 G83/2, CEI 021 AS 4777.2 & AS 4777.3, EN50438 Erzeuger Typ A	IEEE 1547-2018			

\* Grid parameters are configurable through remote monitoring  
 \* All NEC required adjustment factors have been considered for AC outputs. AC current outputs will not exceed stated values for Rated Output AC Current

### COMPLIANCE

\*NEC 2020 Section 690.11 DC Arc-Fault Circuit Protection  
 \*NEC 2020 Section 690.12 Rapid Shutdown of PV Systems on Buildings  
 \*NEC 2020 Section 705.12 Point of Connection (AC Arc-Fault Protection)