



WallArk

Wall Mount LiFePO4 Battery Pack



Flexible Investment

5kWh/10kWh modular design, scalable from 5 to 100 kWh



TUV Certification

Battery IEC/ UL standard



Fast Installation

Plug & Play battery interface



Perfect Compatibility

Compatible to most inverter brands on the market



Safety



BMS & Breaker two Level over current protection



Fast Charge

High charge/ Discharge rate supporting safety 1C fast charge/ Discharge

WALL MOUNT LIFEPO4 BATTERY PACK

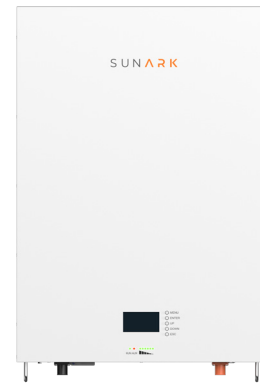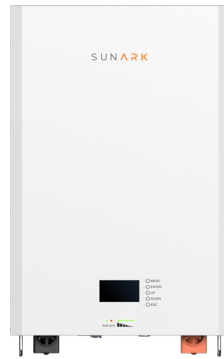

MODEL	WallArk-48100	WallArk-48200	WallArk-51100	WallArk-51200
Electrical Characteristics				
Rate voltage(Vdc)	48		51.2	
Cell combination	15S1P	15S2P	16S1P	16S2P
Rate capacity(AH)	100	200	100	200
Energy storage(KWH)	4.8	9.6	5.12	10.24
Cycle life	6000 cycles @80% DOD, 0.5C			
Charge/Discharge Standard				
Charge voltage(V)	52.5		56	
Max. charge current(A)	100 (Optional 150/200A for 200AH pack)			
Max. discharge current(A)	100 (Optional 150/200A for 200AH pack)			
Discharge cut-off voltage(VDC)	40.5		43.2	
Charge cut-off voltage(VDC)	54.75		58.4	
Environment				
Charge temperature	0°C to 55°C@60±25% Relative Humidity			
Discharge temperature	-20°C to 55°C@60±25% Relative Humidity			
Storage temperature	-20°C to 55°C@60±25% Relative Humidity			
Mechanical				
IP class	IP20 (IP65 Option available for 100AH model)			
Material system	LiFePO4			
Case material	Metal			
Case type	Wall Mount			
Pack dimension L*W*H(mm)	580*390*185	690*485*226	580*390*185	690*485*226
Package dimension L*W*H(mm)	660*450*240	850*570*285	660*450*240	850*570*285
Net weight(kg)	42	85	44	88
Gross weight(kg)	47	95	49	98
Communication				
Protocol(Optional)	Canbus/RS485/RS232			
Monitoring	Bluetooth/WLAN Optional			
Certificates				
Pack	UN38.3, MSDS	CE/IEC/UL1973	CE/UN38.3/MSDS	UN38.3, MSDS
Cell	UN38.3, MSDS, IEC62619, CE, UL1973			