

SOLAR SERVICES

OUR ENGINEERING OFFICE

FREE TRAINING

an assistance offered on our product to launch your first project (either on-site or via skype).

AN IN DEPTH-STUDY OF YOUR PROJECT

our R&D department can offer you a **custom-made product**. Our expert engagement is to make you an offer within 48 hours.

AN OPTIMIZED STUDY

detailed plans are made to answer all projects requirements, our expertise's will ensure our solution is perfectly adapted to the building site constraints and to all regulatory requirements.

A PRIVILEGED ASSISTANCE

Our team provide an assistance through all needed procedures in particular if your project requires some validation by the Inspection office.

NOTA

📍 | Dome Solar - 3 rue Marie Anderson
44 400 Rezé

☎ | Tél. +33 (0)2 40 67 92 92

✉ | info@dome-solar.com

www.dome-solar.com

OUR PARTNERS

KOGYSUN i+

SANDWICH PANEL

PITCHED ROOFS RANGE

EB SOLAR

FIBRO SOLAR

HELIOS B²


ITAL SOLAR

KOGYSUN +

KOGYSUN i+

RB SOLAR

Document printed in France, with vegetable inks, on paper from sustainably managed forests, by Goubault Imprimeur certifié ISO 14001. DANZÉ®



DOME
SOLAR
PHOTOVOLTAIC MOUNTING SOLUTIONS

THE SOLUTION


KOGYSUN i+ solution allows for a simple and quick installation of a photovoltaic generator on a building roof (either partial or total coverage).

QUALITY

Robust and durable system fixed to the building structure (into the purlins) and manufactured with premium components made of aluminum.

SIMPLICITY

Universal clamps for all types of module thicknesses (30 to 50 mm).

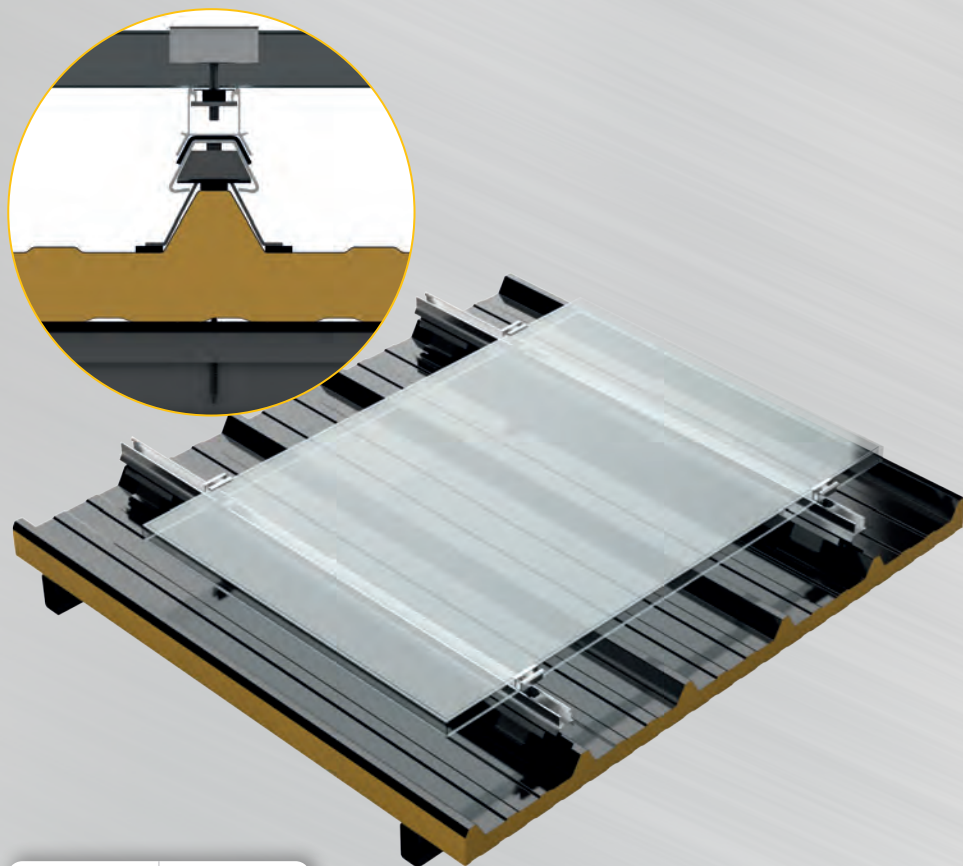

KOGYSUN i+

TECHNICAL CHARACTERISTICS

USE CONDITIONS

New or renovated roof, with total or partial covering
Purlin distance: 2.3 m on sandwich tub polyurethane or rockwool (possibility of making a calculation note)

TYPE OF SUPPORT

Polyurethane or rock wool sandwich panels

MODULE POSITION

Landscape centered or non-centered on the rails

MATERIAL

Steel and aluminum

SYSTEM WEIGHT

3 kg/m² excluding the module and the sandwich panel

SUPPORTING STRUCTURE

Metal or wood frameworks

SYSTEM COMPONENTS

Aluminum rail, steel rail support + EPDM gasket and aluminum clamp

OPTION

TerraGrif™

ETN

Assessment
of New
Techniques

ATec

Technical
Evaluation

MADE IN FRANCE

www.dome-solar.com