



Model Name	AXN10B410G	Total power output for different bi-facial gain coefficients			
		5%	10%	20%	30%
Maximum Power (+3%)	410W	431W	451W	492W	533W
Voc (V)	37.54	37.54	37.54	37.54	37.54
Isc (A)	13.86	14.55	15.25	16.63	18.02
Vmp (V)	31.55	31.55	31.55	31.55	31.55
Imp (A)	13.00	13.65	14.30	15.60	16.90
Module Efficiency (%)	21.0%	22.1%	23.1%	25.2%	27.3%
Series Fuse Rating	30A	Bi-Facial modules produce power on both front and back. The actual power output from the back side is determined by installation conditions. Nominal bi-facial module gain coefficient can run from 5% to 30% or more, depending on the installation height and the amount of indirect irradiance. It is recommended to design the electrical circuits with safety factor that accounts for the additional power in order to protect electrical hardware.			
Junction Box Protection	IP68				
Maximum System Voltage	VDC1500				
Operating Temperature	-40°C to 85°C				
Module type	Framed Bi-Facial				
Connector type	MC4 Compatible ⁱ				
Cable length	12AWG 1200mm ⁱⁱ				
Maximum snow/wind load	5400Pa(snow)/2400Pa(wind)				
Certification/Fire Type	UL61730 ⁱⁱⁱ ; UL1703 Fire Type 3				

i) Staubli MC4 connectors available upon request, ii) Cable length may be customized, iii) Additional certifications available upon request

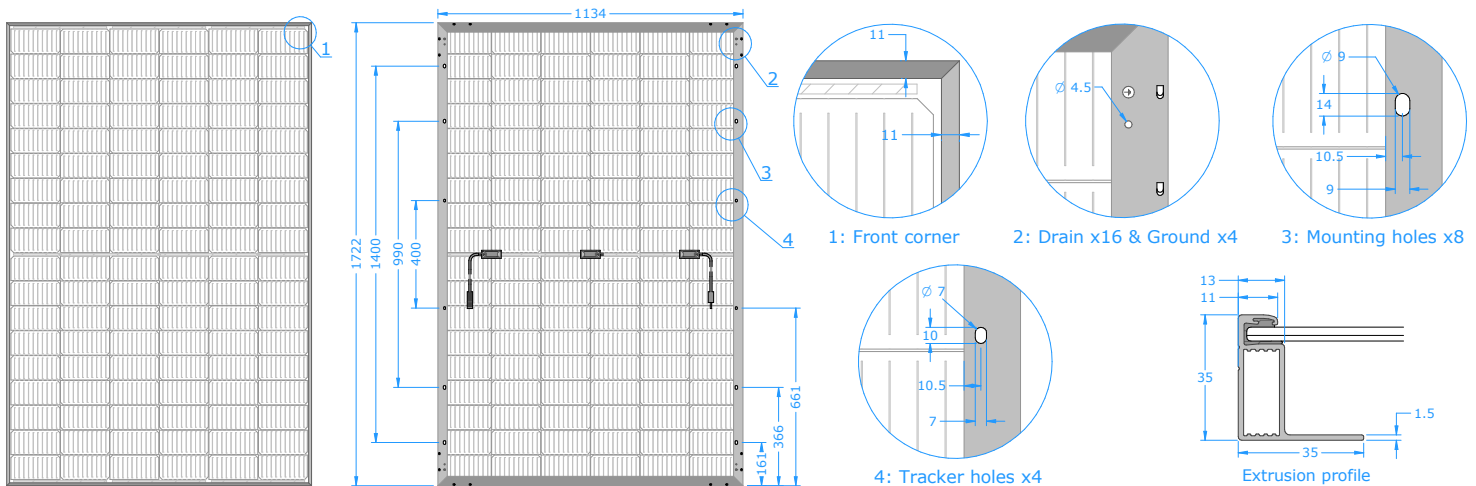

(Units provided in mm)

Linear Performance Warranty

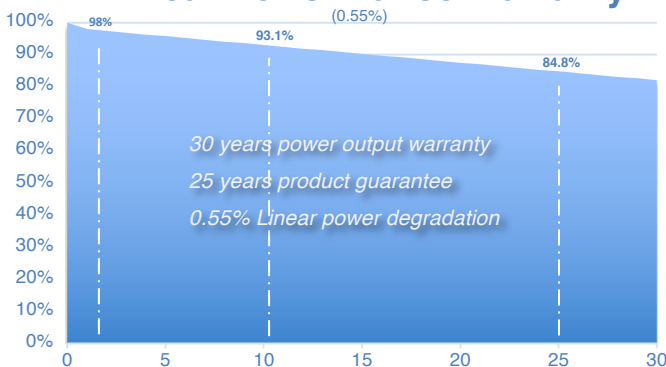

Mechanical Characteristics

Frame	Anodized Aluminum (Silver and Black)
Dimension (L x W x D)	67.80" x 44.65" x 1.38"
Weight	1722mm x 1134mm x 35mm
Pallet	25.17 kg/55.49 lbs
Container	26 pcs
Wind/Snow load	572pcs/40'; 728pcs/53' 5400Pa(front)/2400Pa(rear)

Temperature Coefficients **Standard Test Conditions (STC)**

NOCT	45 °C	Irradiance	1000W/m ²
Short circuit current	+0.040%/C	Module Temperature	25 °C
Open circuit voltage	-0.244%/C	AM	1.50
Max power output	-0.319%/C		

Specifications subject to change without notice