



PRISM SOLAR  
TECHNOLOGIES

Power Redefined.

PST-440-450W

Residential | Commercial

## Features



### More Power

Generate up to 35% more power with bifacial boost.



### Stellar Design

Crafted with aesthetics and durability in mind.



### Advanced Technology

Split cell technology minimizes resistive loss & increases performance.



### Trusted Warranty

25 year product & power performance warranty

## Electrical Specifications (STC\*)

Model	440W	445W	450W
Rated Power (Pmax)	440	445	450
MPP Voltage (Vmp)	34.5	34.80	35.00
MPP Current (Imp)	12.74	12.80	12.86
Open Circuit Voltage (VOC)	41.20	41.40	41.60
Short Circuit Current (ISC)	13.54	13.60	13.66
Module Efficiency	20.31	20.55	20.78
Power Tolerance	-0/+5W		

\*Measured at Standard Testing Conditions (STC): cell temp 25°C, AML5, 1000W/m<sup>2</sup>

## Temperature Ratings

Temperature Coefficient (Pmax)	-0.37%/°C
Temperature Coefficient (Isc)	+0.05%/°C
Temperature Coefficient (Voc)	-0.29%/°C
Normal Operating Cell Temperature	45°C+/-2°C


## Operating Conditions

Temperature	-40°C to 85°C (-40°F to 185°F)
Series Fuse Rating	25A
Maximum System Voltage	1500V
Maximum Load Capacity	2400 Pa wind load, 5400 Pa snow load
Fire Performance Class	Type I; Class C



## Mechanical Data

Glass	3.2mm tempered low iron, anti-reflective coating
Frame	Anodized Aluminum Alloy
Bypass Diodes	3
Junction Box	IP68 with bypass-diodes
Cables	PV wire, 12 AWG, 4mm <sup>2</sup> , 1200mm
Connectors	MC4 compatible, Staubli EV02
Dimensions	1910mm X 1134mm X 35mm
Weight	24kg (53lbs.)
Packing	31pcs/pallet; 744pcs 40HQ

## Engineer Drawing

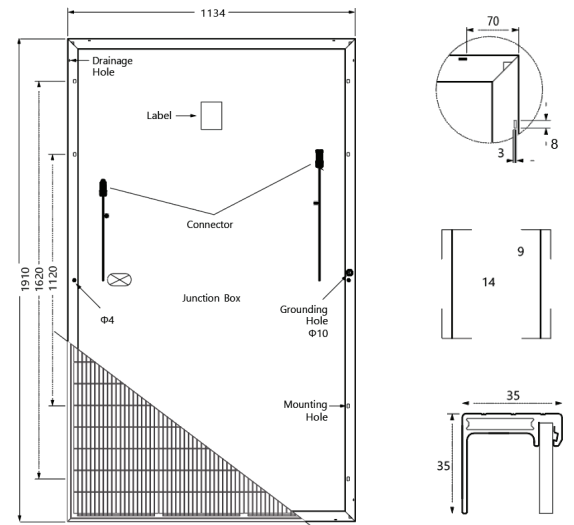

## I-V Curves

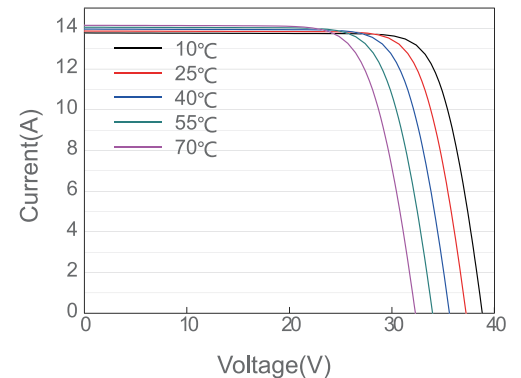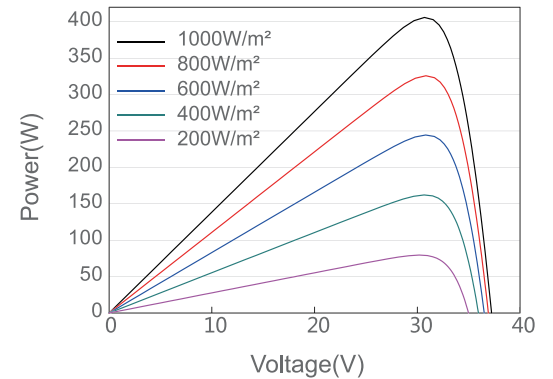

## Certifications

IEC 61215 / 61730

CEC

Salt Mist