

FE60-166M FULL BLACK

High Efficiency Low LID with Half-cut Technology

NEW

Big Size: Cell 166*83

Monocrystalline

360W / 365W
370W / 375W / 380W



- **Module Efficiency:**
20.9%
- **No. of Cells:**
120 (6 x 20)
- **Weight:**
19.5kg
- **Dimensions:**
1755mmx1038mmx35mm



Jiangsu Xiehang New Energy Intelligent Equipment Co.Ltd
www.xiehangenergy.com

Factory: HT FELLOW ENERJI A.Ş.
Factory: CHEN GUNES ENERJISI SANAYI VE
TICARET LIMITED SIRKETI



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production. Low LID Bifacial PERC with Half-cut Technology



9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

12Ys

Products Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BOS costs

25Ys

Warranty on power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant highperformance transparent backsheets structure enhance reliability, triple EL tested of high quality control.



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400Pa)

5W

Positive tolerance 0/+5W guaranteed

PID


PID Resistant

Comprehensive and first-rate certification system

IEC61215:2016, IEC61730:2016 Latest Standard and UL 61730 Latest Standard, ISO9001 ISO14001 and ISO45001, meeting the highest international standards Strict quality control



Engineering Drawing

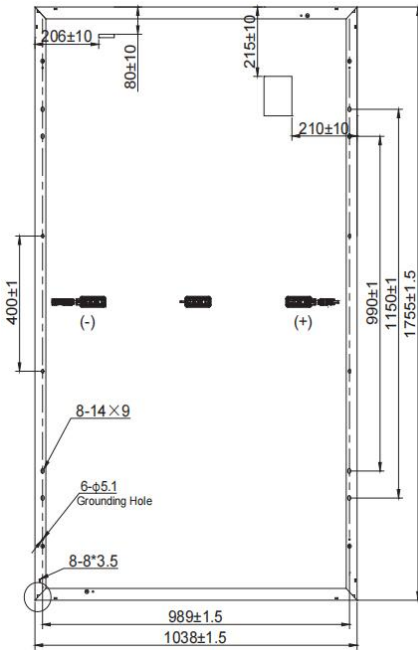

Electrical Characteristics (STC)

Module Type	FE60-166M				
Maximum Power(Pmax)	360W	365W	370W	375W	380W
Open Circuit Voltage(Voc)	41.1V	41.3V	41.5V	41.6V	41.7V
Short Circuit Current(Isc)	11.53A	11.63A	11.72A	11.85A	11.98A
Maximum Power Voltage(Vmp)	33.7V	33.9V	34.1V	34.2V	34.6V
Maximum Power Current(Imp)	10.69A	10.77A	10.86A	10.98A	10.99A
Module Efficiency(%)	19.8%	20.0%	20.3%	20.6%	20.9%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	20A				
Operating Temperature	-40°C TO +85°C				

*STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C


Electrical Characteristics(NMOT)

Module Type	FE60-166M				
Maximum Power(Pmax)	267W	271W	275W	279W	283W
Open Circuit Voltage(Voc)	38.8V	39.0V	39.2V	39.4V	39.6V
Short Circuit Current(Isc)	9.30A	9.39A	9.48A	9.58A	9.65A
Maximum Power Voltage(Vmp)	31.8V	32.0V	32.1V	32.4V	32.6V
Maximum Power Current(Imp)	8.40A	8.47A	8.54A	8.61A	8.68A


*NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

IV Curves

Current-Voltage & Power-Voltage Curve

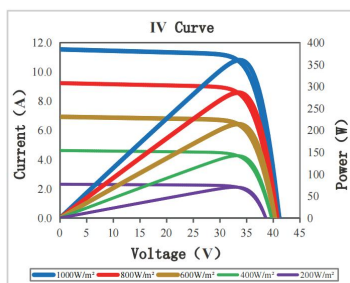

Warranty

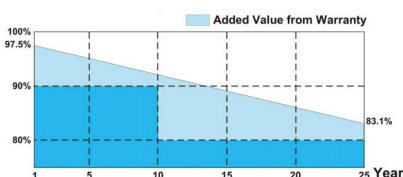

12-year product warranty

25-year warranty on power output

*Specific information is referred to the product quality guarantee

Temperature Coefficient of Pmax	Y(Pm)	- 0.350%/°C
Temperature Coefficient of Voc	β(Voc)	- 0.275%/°C
Temperature Coefficient of Isc	α(Isc)	+0.045%/°C

Solar Cells Monocrystalline 166 x 83mm

No. of Cells 120 (6×20)

Dimensions 1755mm×1038mm×35mm

Weight 19.5kg

Front Glass High transmission tempered glass

Frame Anodized aluminum alloy

Junction Box IP68

Cable 4mm²(IEC)Length: (+)400mm, (-)200mm/length can be customized

Connectors MC4/MC4 Compatible

Packaging Configuration 31 pcs/box: 744pcs 40'HQ Container

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright@2022V2 Plus Specifications are subject to change without further notification