

VSUN550-144BMH

VSUN550-144BMH
VSUN540-144BMH

VSUN545-144BMH
VSUN535-144BMH



550W

Highest power output

12 years

Material & Workmanship warranty




21.50%

Module efficiency

30 years

Linear power output warranty

KEY FEATURES

-  MBB technology with Circular Ribbon
-  Higher output power
-  Half-cell Technology
-  Positive tolerance offer
-  Micro Gap
-  Up to 30% extra power generation yield from the back side
-  Certified for salt/ammonia corrosion resistance
-  Load certificates: wind to 2400Pa and snow to 5400Pa
-  Lower LCOE


ABOUT US

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide.

PRODUCT CERTIFICATION



WARRANTY

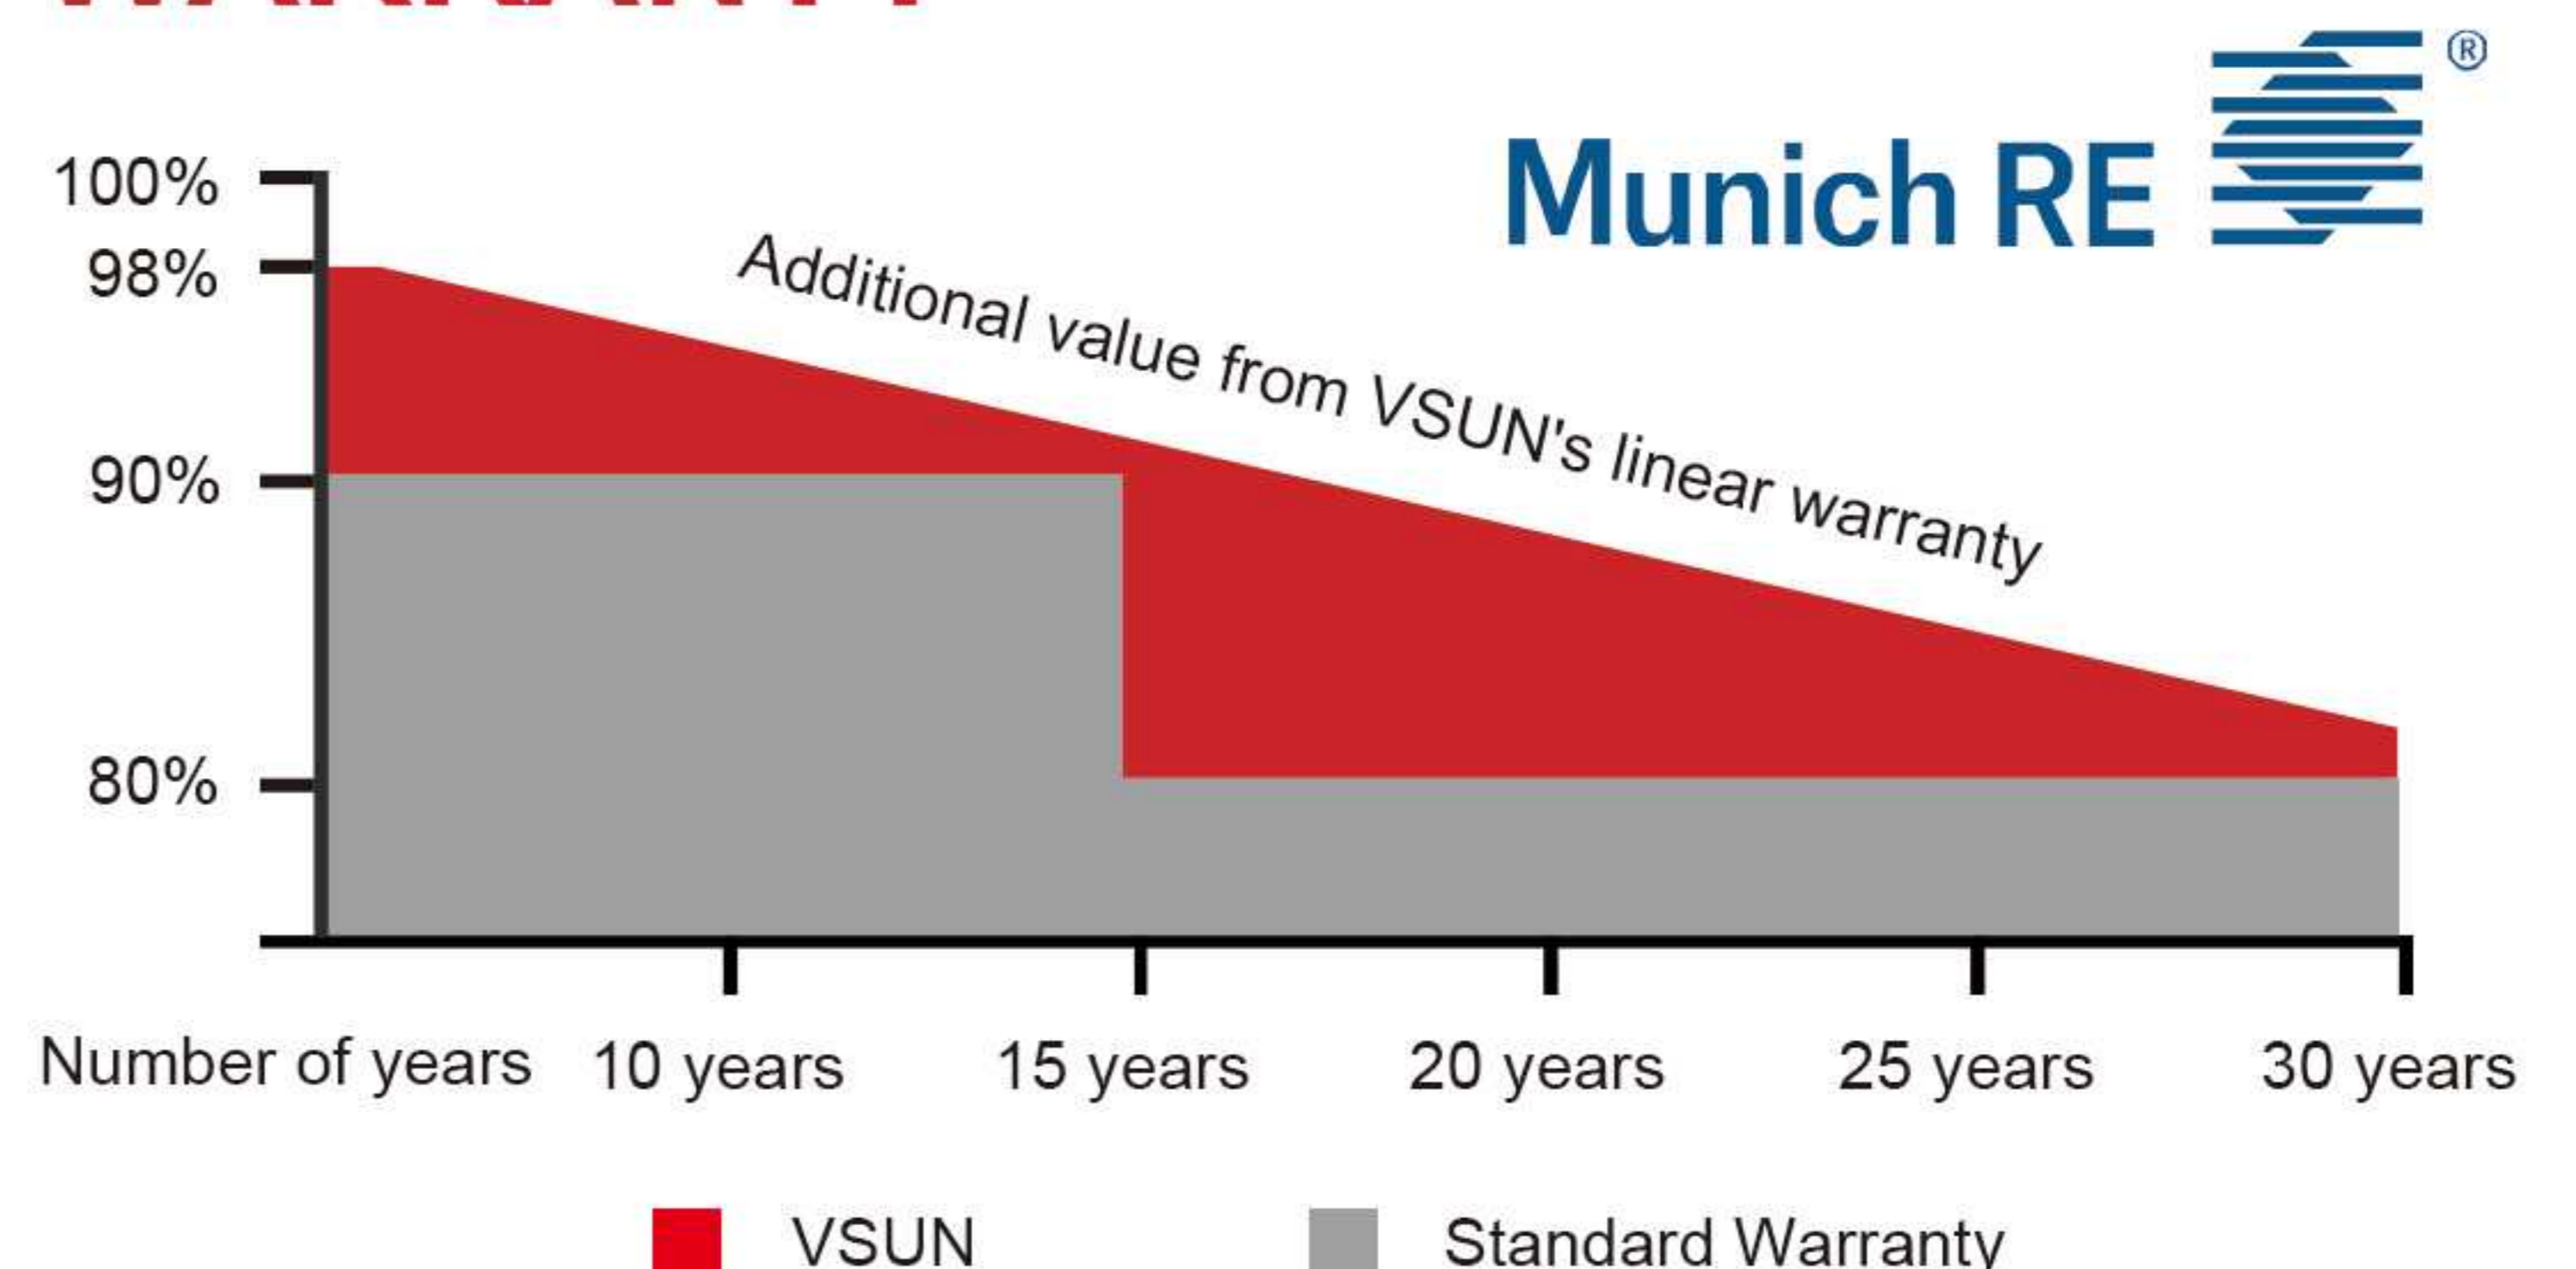

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN550-144BMH	VSUN545-144BMH	VSUN540-144BMH	VSUN535-144BMH
Maximum Power - Pmax (W)	550	545	540	535
Open Circuit Voltage - Voc (V)	49.92	49.81	49.65	49.5
Short Circuit Current - Isc (A)	13.99	13.92	13.85	13.78
Maximum Power Voltage - Vmpp (V)	42	41.8	41.65	41.5
Maximum Power Current - Impp (A)	13.1	13.04	12.97	12.9
Module Efficiency	21.52%	21.32%	21.13%	20.93%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics with different rear side power gain(reference to 545 front)

Pmax (W)	Voc (V)	Isc (A)	Vmpp (V)	Impp (A)	Pmax gain
572	49.71	14.62	41.80	13.69	5%
600	49.71	15.31	41.80	14.34	10%
653	49.81	16.70	41.70	15.65	20%
680	49.81	17.40	41.70	16.30	25%

Material Characteristics

Dimensions	2256×1133×35mm (L×W×H)
Weight	28.6kg
Frame	Silver anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate) or POE
Back Sheet	Transparent mesh backsheet
Cells	12×12 pieces bifacial monocrystalline solar cells series strings
Junction Box	IP68, 3 diodes
Cable&Connector	Potrait: 500 mm (cable length can be customized) , 1×4 mm 2 , compatible with MC4

Temperature Characteristics

NOCT	45°C(±2°C)
Voltage Temperature Coefficient	-0.27%/°C
Current Temperature Coefficient	+0.048%/°C
Power Temperature Coefficient	-0.32%/°C

Maximum Ratings

Maximum System Voltage [V]	1500
Series Fuse Rating [A]	30
Bifaciality	70%±10%


Packaging

Dimensions(L×W×H)	2290×1125×1253mm
Container 20'	155
Container 40'	310
Container 40'HC	620

System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions

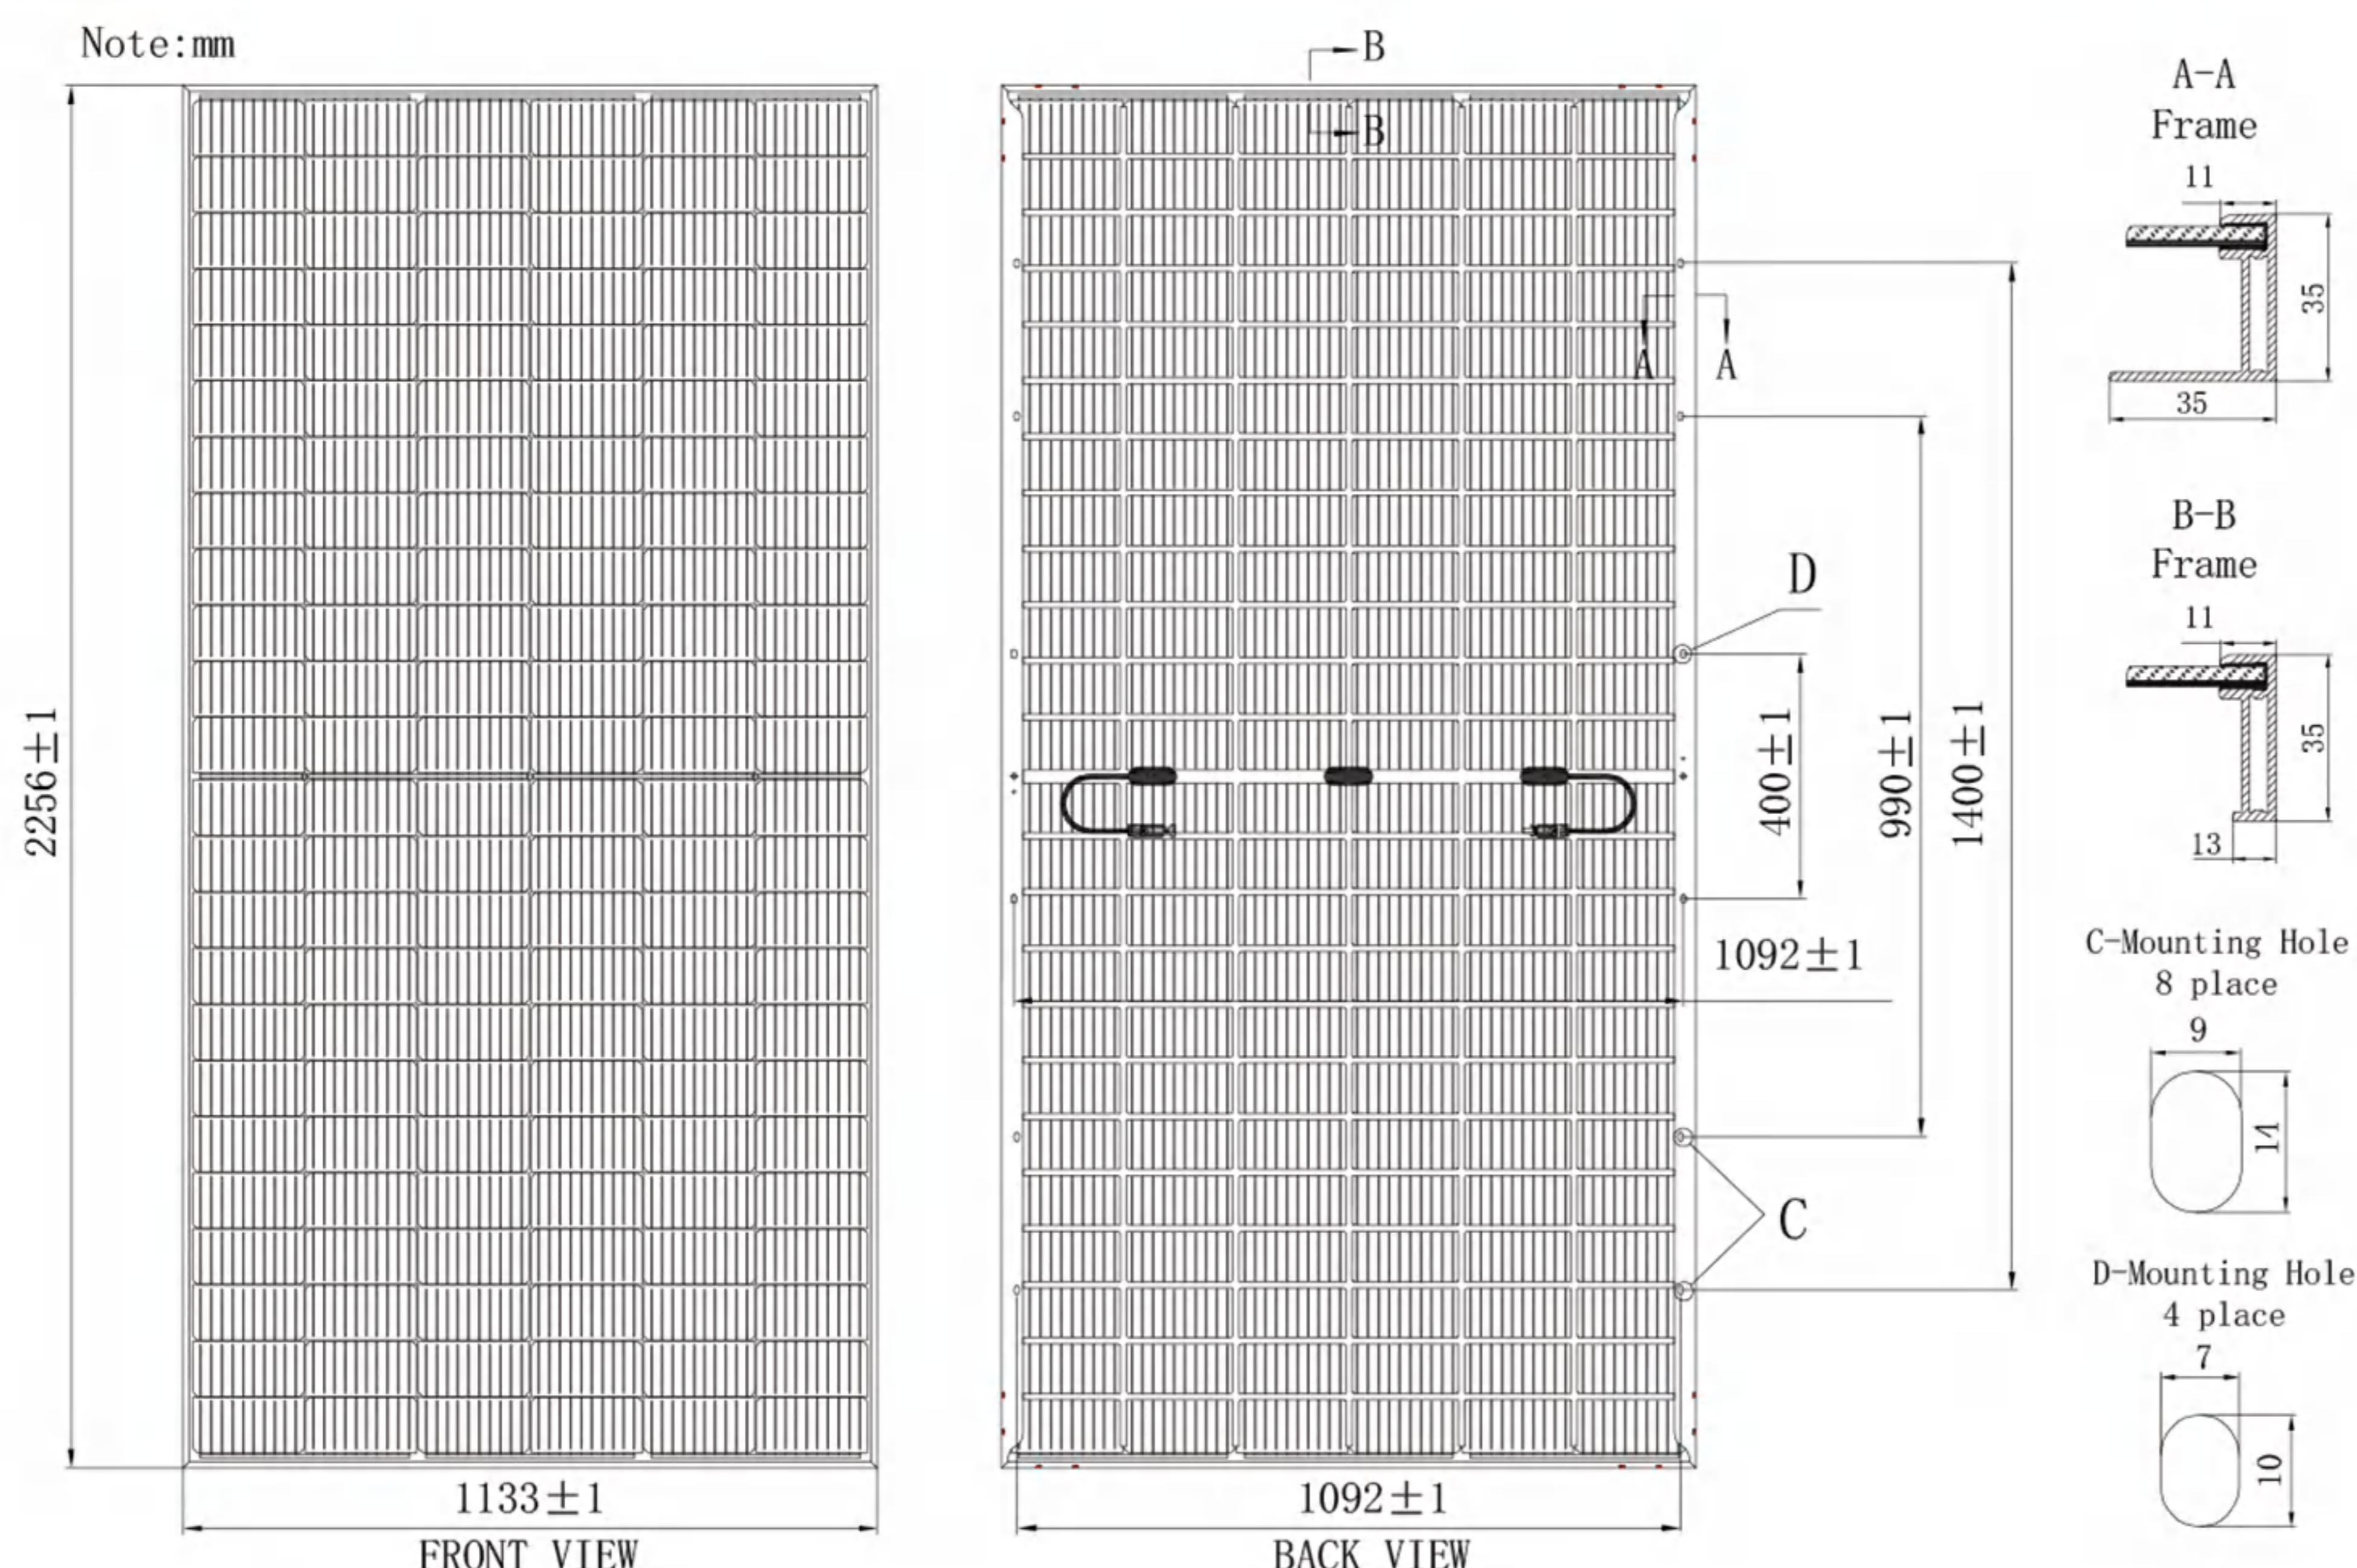

IV-Curves

