
Tile roof mounting system

Powerack have many types of Tile Roof Hooks, suitable for most roof types of Tile, Flat Tile, Slate Tile, Asphalt Shingle Tile. Unique designed of Mid&End clamps are used for 30-40mm thickness solar modules. A design that includes major specifications saves you inventory cost, quick and easy to install. Innovative design of rail connect base-support can effectively increase the product strength, ensure the safety of the product use. Powerack have a large variety of roof hooks provide customers options. Customized allowed according to customer needs to meet special installation requirements.



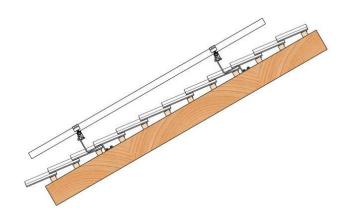

Technical features:

Product name	Tile roof mounting system
Application	Tile roof, Flat tile roof, Slate roof;
Inclination	Parallel to the roof
Material	AL6005-T5, SUS304
Finish	AL 6005-T5 Anodized, SUS 304 Shot blasting
Standard	TUV, AS/NZ1170.2, JIS C 8955, MCS 012, TUV, UL2703 etc
Tilt angle	5°~60°
Module orientation	Landscape or Portrait

Product advantages:

- 1. Good heat absorption.
- 2. Good waterproof and rain protection, convenient installation, and flexibility.
- 3.Excellent quality, Low price
- 4. Provide customized services