



Cando-Solar

Big Eco Series

210HJT LeadFree Solar Module

PRODUCT: ZNC-N1240GD

POWER RANGE: 405-425W

425W

Max Power output

22.1%

Max Panel Efficiency

Lead Free

Advanced 24BB Technology

HJT

210 Wafer

Advantages



More Power Output

- Advanced 210HJT cell and 24BB module technology leads to higher efficiency(22.1%);
- Better Weak Illumination Response and Lower temperature coefficient (-0.24%) for HJT;
- N-type solar cell has no LID naturally, can increase power generation



Better Looking

- Excellent cell color control by HJT technology;
- Designed with aesthetics in mind, 24BB thinner wires that appear all black at a distance



ECO Friendly

- Innovative 24BB module technology leads to LEAD-FREE;
- Double-glass design leads to fluoride-free;
- 210HJT technology leads to thinner wafer and lower energy consumption



Maximum safety

- Double-glass design leads to avoid fire;
- Perfect size and low weight, Easy for handling and Economy for transporting;
- Diverse installation solutions. Flexible for system deployment;


Certificates & Warranty

IEC61215:2016&IEC61730:2016

12year Product Workmanship Warranty

30year Power Warranty

1% first year degradation and 0.4% Annual Power Attenuation

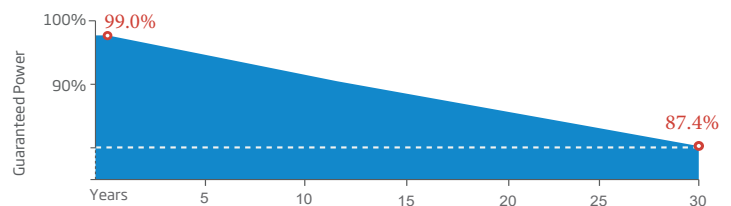



Big Eco Series

210HJT Lead Free Solar Module

Cando-Solar

PRODUCT: ZNC-N1240GD

POWER RANGE: 405-425W

Electrical data(STC)

Max. Power Output Pmax (W)	405	410	415	420	425
Max. Power Voltage Vmp (V)	25.4	25.5	25.7	25.8	25.9
Max. Power Current Imp (A)	15.98	16.08	16.18	16.29	16.42
Open Circuit Voltage Voc (V)	29.7	29.8	29.9	30.1	30.2
Short Circuit Current Isc (A)	17.02	17.09	17.19	17.29	17.39
Module Efficiency(%)	21.1	21.3	21.6	21.8	22.1

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

*Measurement Tolerance (±3.0%)

Electrical data(NOCT)

Max. Power Output Pmax (W)	306	310	313	317	321
Max. Power Voltage Vmp (V)	23.8	23.9	24.1	24.2	24.3
Max. Power Current Imp (A)	12.86	12.94	13.04	13.12	13.20
Open Circuit Voltage Voc (V)	28.3	28.4	28.6	28.7	28.8
Short Circuit Current Isc (A)	13.74	13.8	13.88	13.96	14.02

*NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

Temperature Ratings

Temperature Coefficients of Pmp	-0.24%/ °C
Temperature Coefficients of Voc	-0.22%/ °C
Temperature Coefficients of Isc	+0.047%/ °C
NOCT(Nominal Operating Cell Temperature)	43±2°C

Mechanical Data

Solar Cells	HJT 210x105mm
No. of cells	80pcs(5x16)
Module Dimensions	1754x1096x30mm
Weight	23.6kg
Glass	2.0 mm, Double AR Coated Heat Strengthened Glass
Frame	30mm Anodized Aluminium Alloy
J-Box	IP 68 rated (3 diodes)
Cables	4.0mm ² , Length can be customized


Operating Properties

Maximum System Voltage (V)	1500(DC)
Operating Temperature (°C)	-40~+85
Mechanical load(pa)	2400/5400
Maximum Series Fuse Rating (A)	30

Packaging Configuration

Modules Per Pallet	36pcs
Modules Per Container(40HC)	936cs
Modules Per Container(20GP)	216cs

Dimensions of PV Module(mm)

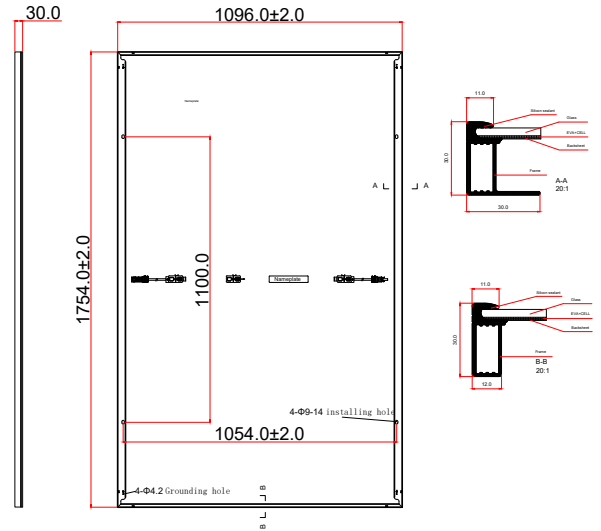

Characteristic Curves(420W)

