
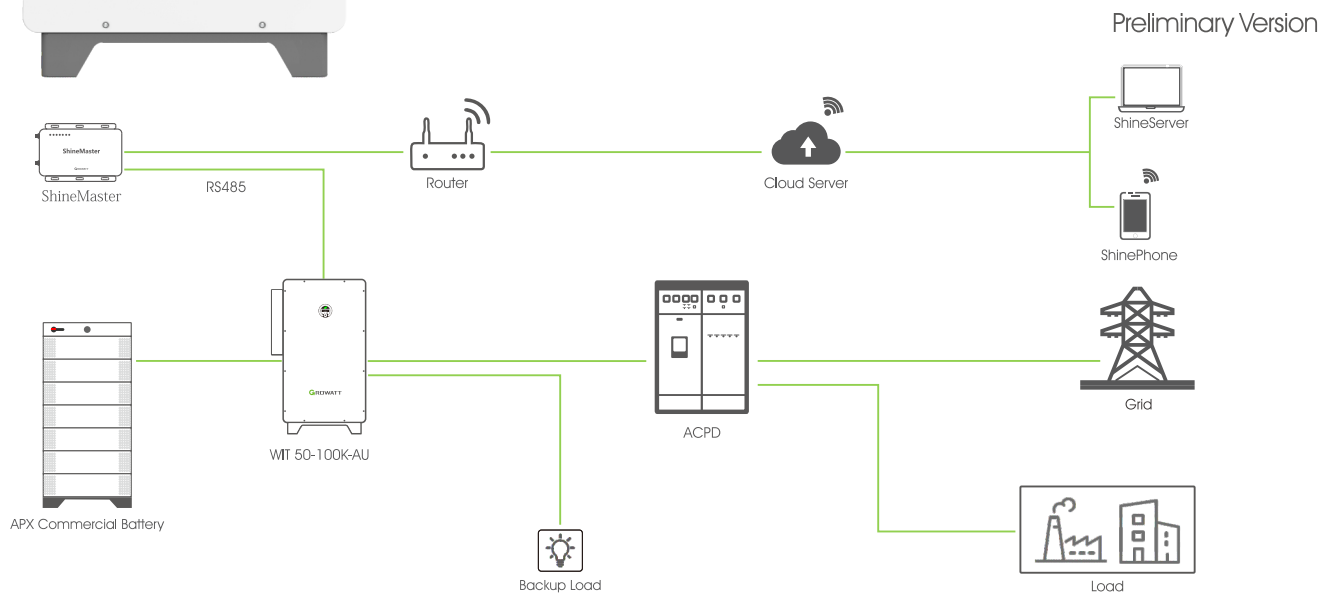


WIT 50-100kW Commercial AC-Coupled Inverter

(WIT 50-100K-A, WIT 50-100K-AU)

- Scalable system configuration, extend to 300kW
- Support UPS function and black start
- 100% unbalanced load when backup
- 110% continuous AC overloading capacity
- Support remote control of DG
- Grid-support functions

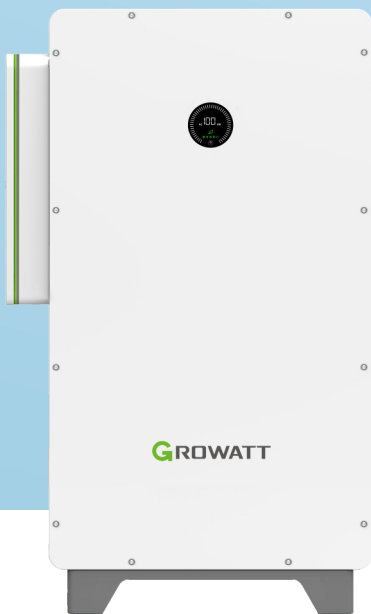

* WIT 50-100K-A has one AC port for grid-tied application or off-grid application.

* WIT 50-100K-AU has two AC ports, one is for grid connection while the other is for emergency power backup, therefore it supports on/off grid transfer function.

Datasheet	WIT 50K-A WIT 50K-AU	WIT 63K-A WIT 63K-AU	WIT 75K-A WIT 75K-AU	WIT 100K-A WIT 100K-AU
Output data(AC)				
AC nominal power	50000W	63000W	75000W	100000W
Max. AC apparent power	55KVA	69,3KVA	82,5KVA	110KVA
Nominal AC voltage	380/400/415V			
AC voltage range	-15%~+10%			
AC grid frequency	50/60 Hz			
AC grid frequency range	45-55Hz/55-65Hz			
Max. output current	83,3A@380V 79,7A@400V	105A@380V 100,4A@400V	125A@380V 119,6A@400V	166,7@380V 159,4A@400V
Adjustable power factor	-1...+1			
THDI	<3%			
AC grid connection type	3P3W+PE/3P4W+PE			
Battery data (DC)				
Continuous charging and discharging power	56,7KW	71,4KW	85,1KW	113,5KW
Battery voltage range	600-1000V (for 3P3W) / 680-1000V (for 3P4W)			
Recommended battery voltage	768V			
Max charging and discharging current	83,3A	105A	125A	167A
BMS communication	RS485/CAN			
Backup power (AC)*				
Rated AC output power	50KW	63KW	75KW	100KW
Max. AC apparent power	60KVA	75,6KVA	90KVA	120KVA
Rated AC output voltage	220V/230V/240V/380V/400V/415V			
Nominal AC output frequency	50/60 Hz			
Load connection	3W+N+PE			
Max. output current	90,9A	114,5A	136,4A	181,8A
THDv	<3% (Linear load)			
Load unbalance	100% three-phase unbalanced			
Overload	<= 110% : Continues 110%~120% : 10min >120% : 200ms			
On/off grid transfer time	20ms			
Efficiency				
MAX. Battery charge/discharge efficiency	98,0%			
Protection devices				
Battery reverse protection	Yes			
AC/DC surge protection	Class II			
Insulation resistance monitoring	Yes			
Ground fault monitoring	Yes			
Grid monitoring	Yes			
Residual-current monitoring unit	Yes			
AC short-circuit protection	Yes			
Anti-islanding protection	Yes			
General				
Dimensions (W / H / D)	820/1350/510mm			
Weight	120kg			
Operating temperature range	- 30 °C~60 °C (> 50°C, derating)			
Relative humidity	0~100%			
Altitude	4000m			
Topology	Transformerless			
Cooling	Smart air cooling			
IP degree	IP66			
Display	OLED+LED/WIFI+APP			
Interfaces: RS485/CAN/USB	Yes			
Interfaces: RS485/4G/LAN-X	Opt			
Warranty (5/10 years)	Yes/Opt			

GB/T 34120-2017, IEC/EN61000-6-1, IEC/EN61000-6-3, IEC/EN62477-1, IEC/EN62109-1, IEC/EN62109-2, IEC62116, IEC61727, G99:2020, EN50549-1, VDE 4105, VDE 0124, NRS 097-2-1

* The parameter of backup power is only available for WIT 50-100K-AU model.

* 2022 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.