


Lumina I

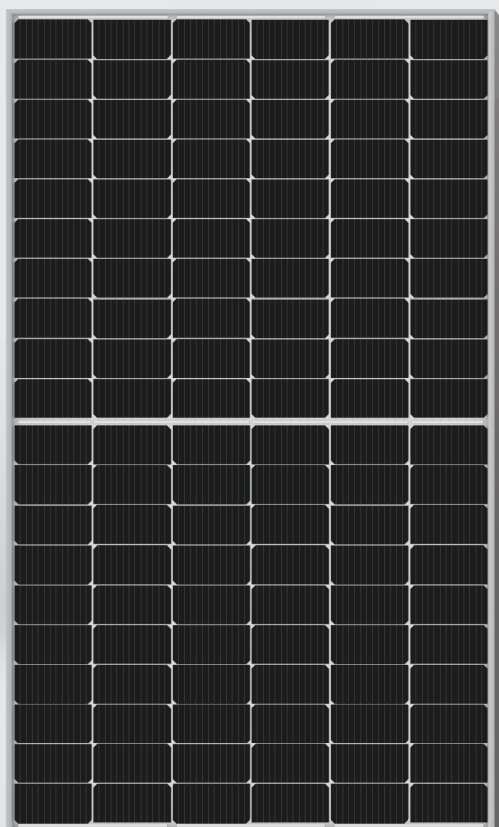

605W

Maximum
Power Output

21.4%

Maximum
Module Efficiency

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 30GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

SS9-60HD 585-605M

Bifacial Dual Glass Module



High Power Output

With 210 large wafer technology and slicing technology, multi-grid technology, high-density module packaging to ensure higher power output of modules



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle




More Power Generation

Gallium doped wafers reduce annual power degradation, optimized circuit design ensures more power generation under shading



High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

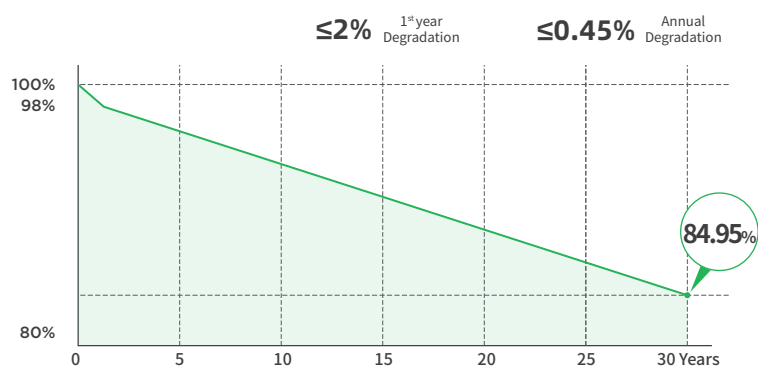

12 Years Product Warranty **30** Years Linear Power Warranty

Comprehensive Certificates

- IEC61701
- IEC62716
- DINEN60068-2-68
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics STC: Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5


Module Type	SS9-60HD -585M		SS9-60HD -590M		SS9-60HD -595M		SS9-60HD -600M		SS9-60HD -605M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	585	439	590	442	595	446	600	450	605	454
Open-Circuit Voltage (Voc)[V]	40.80	38.60	41.00	38.80	41.20	39.00	41.40	39.20	41.60	39.40
Maximum Power Voltage (Vmp) [V]	34.20	32.10	34.40	32.30	34.60	32.50	34.80	32.70	35.00	32.90
Short-Circuit Current (Isc)[A]	18.27	14.73	18.32	14.76	18.37	14.78	18.42	14.81	18.47	14.85
Maximum Power Current (Imp) [A]	17.11	13.68	17.16	13.71	17.21	13.71	17.26	13.77	17.31	13.81
Module Efficiency	20.67%		20.85%		21.02%		21.20%		21.38%	
Power Tolerance	0~+5W									
Temperature coefficient of Isc	+0.050%/°C									
Temperature coefficient of Voc	-0.260%/°C									
Temperature coefficient of Pmax	-0.340%/°C									

Bifacial Output-Rearside Power Gain (595 W)


Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	625	655	684	714	744
Open-Circuit Voltage (Voc)[V]	41.10	41.10	41.10	41.10	41.10
Maximum Power Voltage (Vmp) [V]	34.70	34.70	34.70	34.70	34.70
Short-Circuit Current (Isc)[A]	19.34	20.26	21.18	22.10	23.02
Maximum Power Current (Imp) [A]	18.02	18.88	19.74	20.60	21.46

Mechanical Characteristics

Cell Type	Mono PERC (M12)
Number of Cells	120(6x20)
Dimensions	2172X1303X35mm
Weight	34.5kg
Glass	Front Glass, 2.0mm AR coated tempered glass Back Glass, 2.0mm glazed tempered glass
Frame	Silver, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC),12AWG(UL) 300mm (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC-EVO2 or MC4 Compatible
Packaging	31 Pieces/Pallet, 558 pieces/40' container

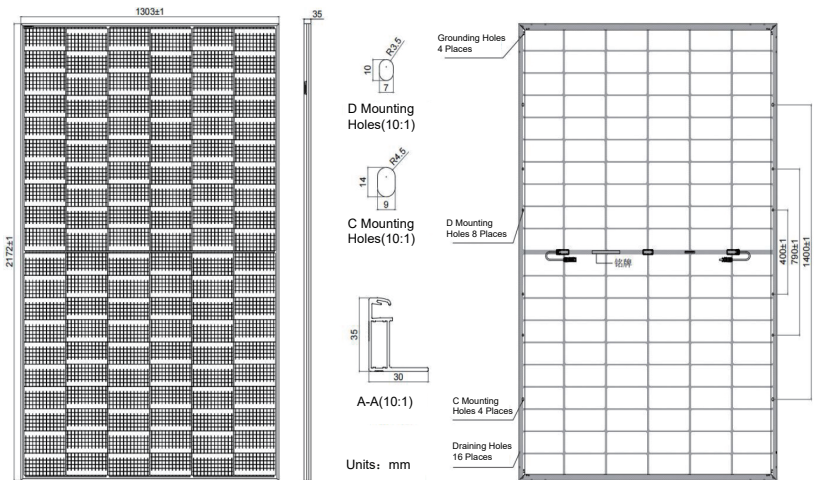Engineering Design**Operating Conditions**

Maximum System Voltage	1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Nominal operating cell temperature	43±2°C
Bifaciality	70±10%

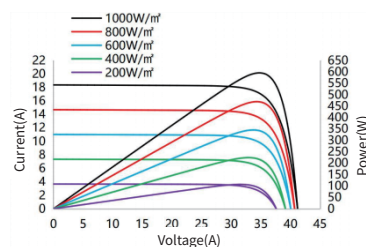CharacteristicsI-V/P-V Curve at Different Irradiation
SS9-60HD-595MI-V Curve at Different Temperature
SS9-60HD-595M