## **FLEXIBLE SOLAR PANEL**

### TS-EFS150M





# **GIVING YOU MORE**



3% positive tolerance



Series of internal harsh tests



Authorised photovoltaic certificates



Linear performance warranty

EFSM series is at the top of the range, thanks to the use of selected high efficiency crystalline silicon cells, reaching a record 21% conversion of sunlight into electricity and with a pleasant appearance, thanks to back-contact technology which hides the electrical contacts. crystalline cells represent the most advanced available technology on the market, and make the Top Solar panels the highest-efficiency flexible panels.

www.topsolar-energy.com

Shenzhen Top Solar Energy Co.,Ltd.

ADD:F2,No.255,Zhangbei Blvd,


Ailian Community,Longgang District,Shenzhen,China

Tel:86 755 85224431 Fax:86 755 28167996 Email:info@topsolar-energy.com



## FLEXIBLE SOLAR PANEL

TS-EFS150M

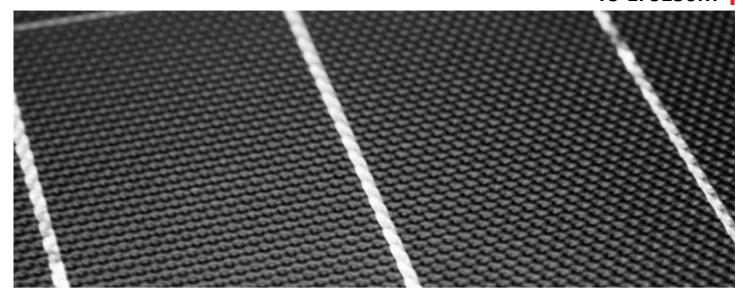

#### **Electrical Characteristics under STC\***

Model No.:	TS-EFS150M
Maximum Power-Pmax(Wp)	150W
Voltage at Maximum Power-Vmp(V)	19.51V
Current at Maximum Power-Imp(A)	7.69A
Open Circuit Voltage-Voc(V)	23.83V
Short Circuit Current-Isc(A)	8.16A
Solar Cell Efficiency(%)	18.6
Power Tolerance(%)	0/+3

#### **Mechanical Characteristics**

Cell Type	Monocrystalline solar cell
Number of Cells	36(4*9)
Dimension(mm)	1460*670*3
Weight(kg)	2.6
Frontsheet	ETFE
Backsheet	TPT,white/black/blue
Frame	Frameless
Junction box	IP68,bypass diodes
Output cables	4mm²,90cm,MC4

### **Temperature Characteristics**

Temperature Coefficient of Pmax(%)	−0.42%/°C
Temperature Coefficient of Voc(%)	−0.32%/°C
Temperature Coefficient of Isc(%)	0.04%/°C





### **Maximum System Ratings**

Operating Temperature	–40°C to +85°C	
Maximum System Voltage	600V DC	
Maximum Series Fuse Rating	20A	





\*STC(Standard Testing Conditions):Irradiance 1000W/ $\mathbb{m}^2$ , cell temperature 25  $^{\circ}$ C, AM=1.5 \*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/ $\mathbb{m}^2$ ,