



# Gamesa Electric Proteus PV Inverters

Maximum energy and versatility  
for utility-scale projects




Up to 200%  
DC/AC ratio




THDI <1%

MPPT  
efficiency  
99.9%

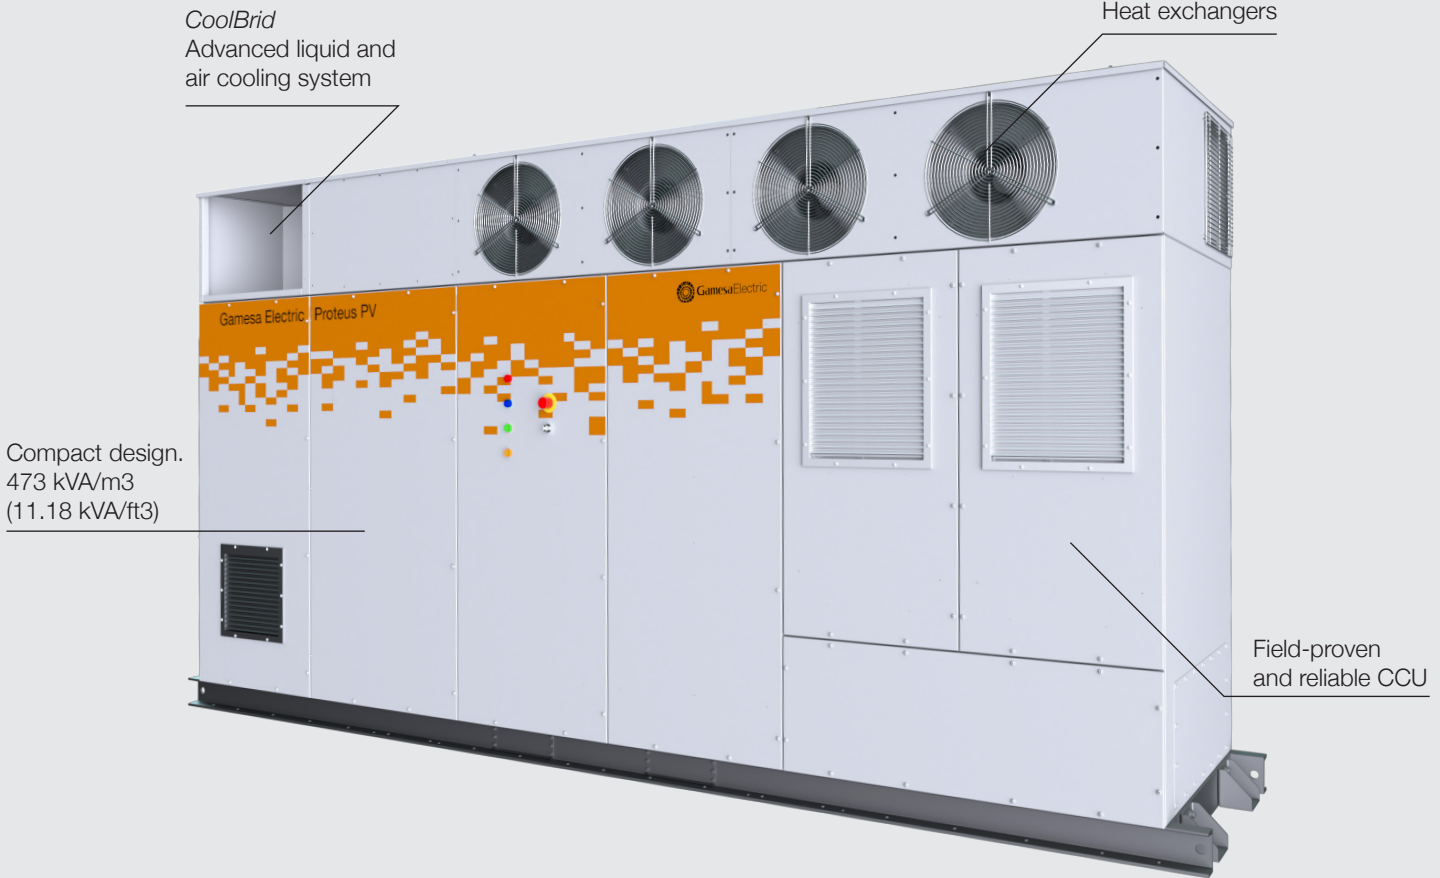Outdoor  
solution




# Gamesa Electric Proteus PV Inverters

 <p><b>Better LCoE</b></p>	<p>Largest single inverter power block in the market with 4,700 KVA</p>	<p>Fewer inverters per project thus lower Capex and Opex</p>	<p>DC/AC ratio of up to 200%</p>
 <p><b>Higher yield</b></p>	<p>Market-leading efficiency with 99.45%</p>	<p>THDi &lt; 1% which reduces losses</p>	<p>Enhanced temperature derating: keeping full power up to 40°C [104°F]</p>
 <p><b>Built to last</b></p>	<p>Designed and manufactured for a 30 year life span</p>	<p>CoolBrid: Smart hybrid cooling system that allows critical components to work far below the temperature limit</p>	<p>Lowest THDi in the market helps to extend power transformers lifespan</p>




The Gamesa Electric Proteus PV Inverters combine high power with maximum versatility for PV plants LCoE reduction.

Different product configurations available to optimize performance in demanding environments as well as different voltage levels to fit customers' needs.

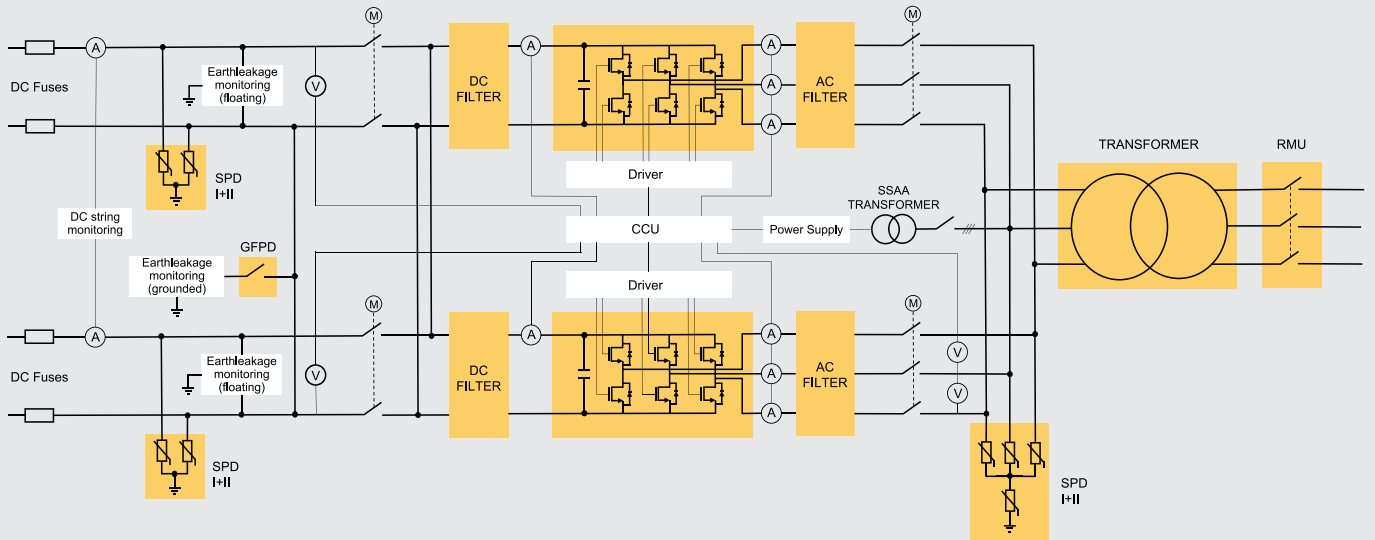


### Efficiency

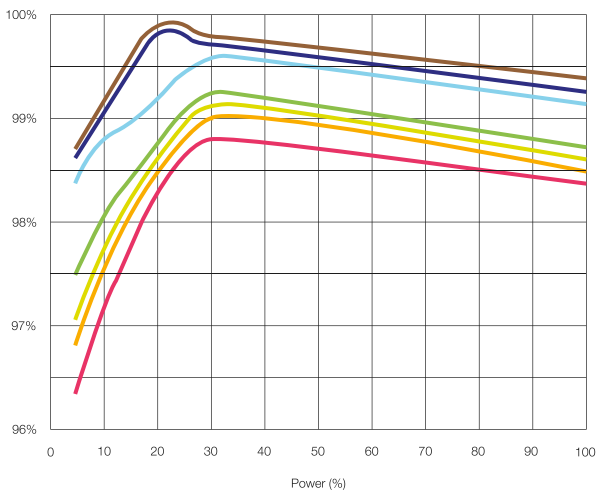

- 1300 Vdc
- 1110 Vdc
- 935 Vdc
- 1220 Vdc
- 950 Vdc
- 915 Vdc
- 1175 Vdc

### Configurations Up to 4700 kVA

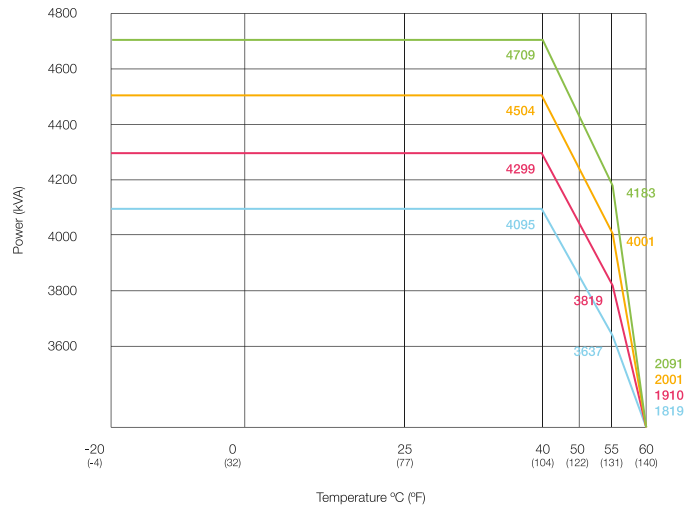

- PV 4700
- PV 4500
- PV 4300
- PV 4100

	Gamesa Electric Proteus PV 4100	Gamesa Electric Proteus PV 4300	Gamesa Electric Proteus PV 4500	Gamesa Electric Proteus PV 4700
<b>DC Input</b>				
DC Voltage Range <sup>(1)</sup>	835 - 1500 V	875 - 1500 V	915 - 1500 V	955 - 1500 V
DC Voltage Range MPPT <sup>(1)</sup>	835 - 1300 V	875 - 1300 V	915 - 1300 V	955 - 1300 V
Number of Power Modules	2, not galvanically isolated, 1 MPPT			
Max. DC Current @40°C [104°F]	2 x 2500 A			
Max. DC Current @50°C [122°F]	2 x 2313 A			
Max. DC Current @55°C [131°F]	2 x 2220 A			
Max. DC Current @60°C [140°F]	2 x 1110 A			
Maximum Short-circuit Current, I <sub>sc</sub> PV	Up to 9000 A			
Nr of DC Ports <sup>(1)</sup>	max 24 fuses +/- monitored			
Fuse Dimensions	125 A to 500 A			
Max. Wire Cross Section per DC Input	2 x 400 mm <sup>2</sup> - 800 AWG			
Energy Production from	0.5% Pn approx.			

<b>AC Output</b>	Three-phase			
Number of phases	4095 kVA			
Nominal AC Power Total @40°C [104°F]	3790 kVA	4299 kVA	4504 kVA	4709 kVA
Nominal AC Power Total @50°C [122°F]	3637 kVA	3979 kVA	4169 kVA	4358 kVA
Nominal AC Power Total @55°C [131°F]	1819 kVA	3819 kVA	4001 kVA	4183 kVA
Nominal AC Power Total @60°C [140°F]	3940 Arms	1910 kVA	2001 kVA	2091 kVA
Maximum AC Current @40°C [104°F]	600 Vrms			
Nominal AC Voltage <sup>(1)</sup>	+/-15%	630 Vrms	660 Vrms	690 Vrms
Nominal Voltage Allowance Range <sup>(1)</sup>	50/60 Hz (± 6%)			
Frequency Range <sup>(1)</sup>	< 1% @Sn			
THD of AC Current	0 (inductive)-1-0 (capacitive)			
Power Factor Range				

<b>Performance</b>	99.45%			
Max. Efficiency	99.24%			
Euro Efficiency	99.02%			
CEC Efficiency	< 200 W	99.07%	99.11%	99.14%
Stand-by Power Consumption				

<b>General Data</b>				
Temperature Range - Operation <sup>(2)</sup>	-20°C / +60°C [-4°F / +140°F]			
Maximum Altitude <sup>(3)</sup>	< 2,000 m [6,561 ft] (w/o derating)			
Cooling System	Liquid & forced air			
Relative Humidity	4% - 100% (w/o condensation)			
Seismic <sup>(1)</sup>	Zone 4 IBC 2012			
Max. wind speed <sup>(1)</sup>	288 km/h (179 mph)			
Snow load <sup>(1)</sup>	2.5 kN/m <sup>2</sup>			
Protection Class	IP55 class 1, NEMA3R			
Dimensions (W/H/D)	4,325 x 2,250 x 1,022 mm [170.3" x 88.5" x 40.2"]			
Weight	4,535 kg [10,000 lb]			

AC Protections	Other Protections
AC Side Disconnection & Short-circuit Current Protection	Two motorized AC circuit breakers - one per each power module
AC Overvoltage Protection	Over-temperature Protection
Anti-islanding	Emergency Push Button
Grid Voltage Fluctuations (LVRT, HVRT) <sup>(1)</sup>	
Frequency Failure	

DC Protections	Optional
DC Disconnection	Low Temperature Kit up to -30°C [-22°F]
DC Short-circuit Protection	Enhanced corrosion protection
DC Over-voltage Protection	
Reverse Polarity Detection	
DC Ground Fault and Insulation Detection	

<b>Communications</b>	
Control <sup>(1)</sup>	Modbus TCP/IP
Monitoring <sup>(1)</sup>	Modbus TCP/IP
Webserver	Included

Standards/Directives <sup>(4)</sup>				
IEC 62109-1	IEC 62920	IEC 60529	NEC 2020	
IEC 62109-2	EN 50530	IEC 61727	CEA 2007	
IEC 61000-6-2/4	IEC 62116	NTS 631 v1.1 SENP, v2.1 SEPE	Rule 14, Rule 21	
IEEE 1547	IEC 61683	UL 1741-SA	PRC 024	
EN 55011	IEEE 519	CSA C22.2	UL 62109-1	

<sup>(1)</sup> Consult Gamesa Electric for a specific configuration

<sup>(2)</sup> With derating from 40°C [104°F]

<sup>(3)</sup> Up to 4,000m [13,123 ft] with derating as optional

<sup>(4)</sup> Consult Gamesa Electric for other Standards/Directives




**+5 GW**  
SOLAR ENERGY



**+127 GW**  
WIND POWER



**+90**  
COUNTRIES

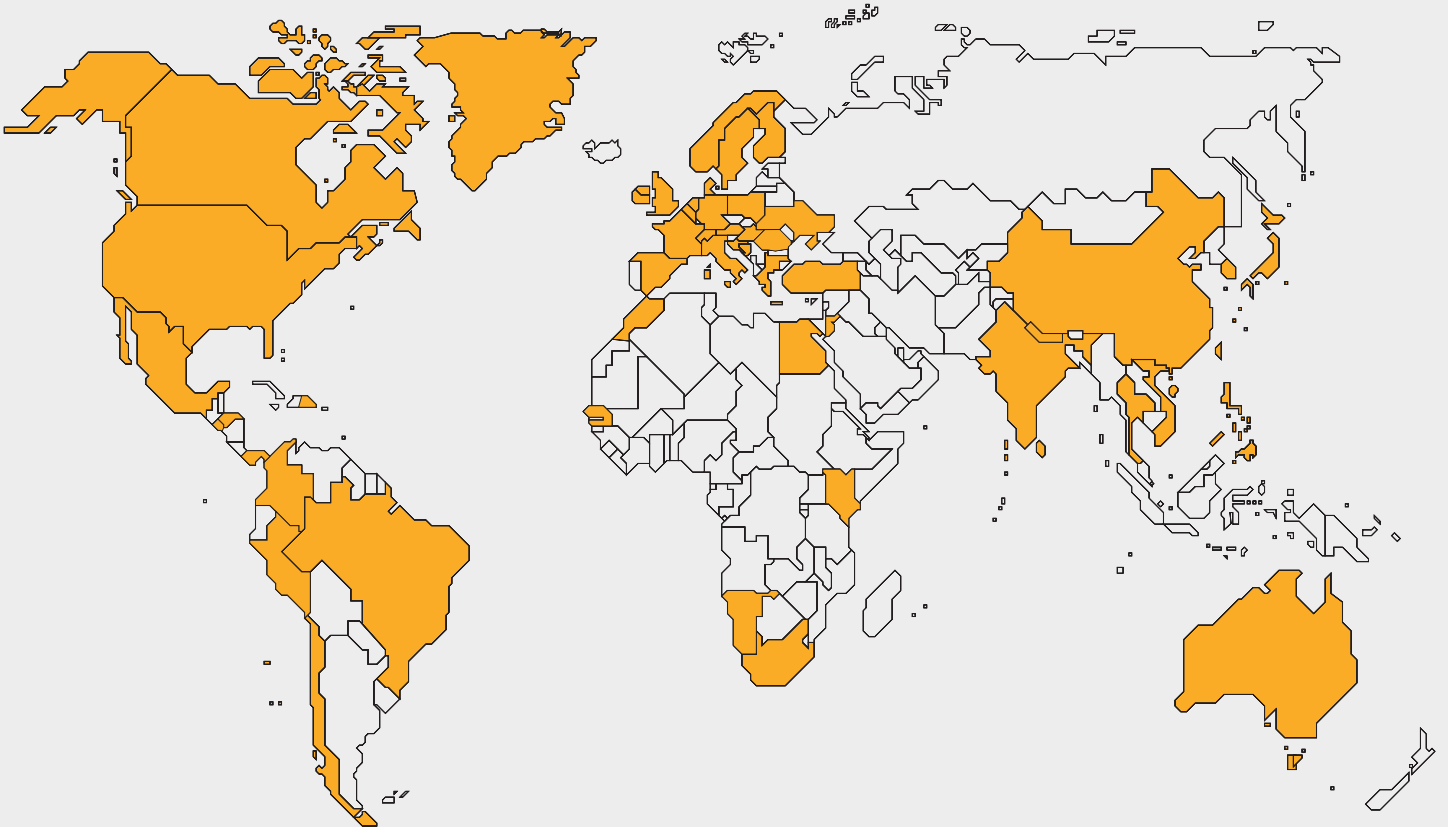

**Worldwide presence**

Australia	Chile	Finland	Ireland	Namibia	Singapore	Ukraine
Austria	China	France	Italy	Netherlands	South Africa	UK
Belgium	Colombia	Germany	Japan	Norway	Spain	USA
Bosnia and Herzegovina	Croatia	Greece	Jordan	Panama	Sri Lanka	
Brazil	Denmark	Honduras	Kenya	Peru	Sweden	
Bulgaria	Dominican Rep.	Hong Kong	Korea	Philippines	Switzerland	
Canada	Egypt	Hungary	Mexico	Poland	Thailand	
	El Salvador	India	Morocco	Senegal	Turkey	



In order to minimize the environmental impact, this datasheet has not been printed. Please make sure before printing this brochure that it is absolutely necessary. Protecting the environment is everyone's responsibility. We have the right to enjoy it, but also the obligation to preserve it.

The present document, its content, its annexes and/or amendments has been drawn up by Siemens Gamesa Renewable Energy for information purposes only and could be modified without prior notice. All the content of the Document is protected by intellectual and industrial property rights owned by Siemens Gamesa Renewable Energy. The addressee shall not reproduce any of the information, neither totally nor partially.