


TAICO-HPM-SERIES



Features

- Pure sine wave solar inverter(on/off Grid)
- Output power factor 1.0
- WIFI&GPRS available for IOS and Android
- Inverter running without battery
- One-key restoration to factory Settings
- Built-in Lithium battery automatic activation
- Built-in 160A MPPT solar charger
- High PV input voltage range(90~450VDC)
- Built-in anti-dusk kit for harsh environment
- Smart battery charge design to optimize battery life
- Dual output
- Touch button

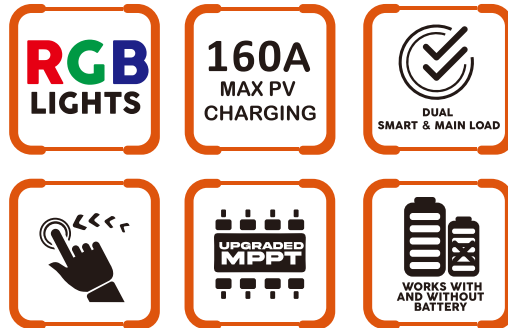


RGB LIGHT

RGB lighting for different working mode

RGB automatically switches with the working mode of the inverter:
 Battery mode: red;
 Utility mode: blue;
 PV mode: purple;

LCD Display

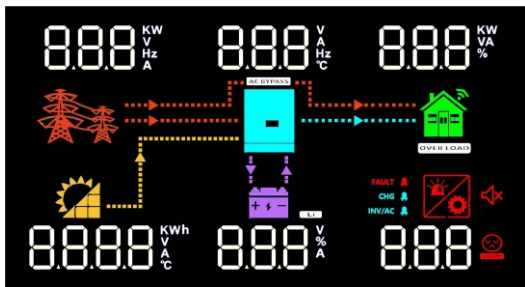

WIFI&GPRS available for ios and Android



MODEL	TAICO-HPM-7.2KW	TAICO-HPM-8.2KW	TAICO-HPM-10.2KW
Phase	1-phase		
Maximum PV Input Power	7200W	8200W	10200W
Rated Output Power	7200W/7200VA	8200W/8200VA	10200W/10200VA
Maximum Solar Charging Current	160A	160A	160A
GRID-TIE OPERATION			
PV Input(DC)			
Nominal DC Voltage/Maximum DC Voltage	360VDC/500VDC		
Start-up Voltage/Initial Feeding Voltage	90VDC/120VDC		
MPPT Voltage Range	90VDC~450VDC		
Number of MPPT Trackers/Maximum Input Current	1/27A		
GRID OUTPUT(AC)			
Nominal Output Voltage	220/230/240VAC		
Output Voltage Range	195~253VAC		
Nominal Output Current	31.3A	35.6A	44.3A
Power Factor	>0.99		
Feed-in Grid Frequency Range	49~51±1Hz		
EFFICIENCY			
Maximum Conversion Efficiency(DC/AC)	98%		
TWO LOAD OUTPUT POWER			
Full Load	7200W	8200W	10200W
Maximum Main Load	7200W	8200W	10200W
Maximum Second Load(battery mode)	2400W	2733W	3400W
Main Load Cut Off Voltage	44VDC	44VDC	44VDC
Main Load Return Voltage	54VDC	54VDC	54VDC
OFF-GRID OPERATION			
AC INPUT			
AC Start-up Voltage/Auto Restart Voltage	120-140VAC/180VAC		
Acceptable Input Voltage Range	90-280VAC or 170-280VAC		
Maximum AC Input Current	40A	40A	50A
Nominal operating frequency	50/60Hz		
Surge power	14400W	16400W	20400W
PV INPUT(DC)			
Maximum DC Voltage	500VDC		
MPPT Voltage Range	90VDC~450VDC		
Number of MPPT Trackers/Maximum Input Current	1/27A		
BATTERY MODE OUTPUT(AC)			
Nominal Output Voltage	220/230/240VAC		
Output Waveform	Pure sine wave		
Efficiency(DC to AC)	94%		
BATTERY & CHARGER			
Nominal DC Voltage	48VDC	48VDC	48VDC
Maximum Solar Charging Current	160A	160A	160A
Maximum AC Charging Current	140A	140A	140A
GENERAL			
PHYSICAL			
Dimension,D X W X H(mm)	420*310*110		
Cartoon Dimension,D X W XH(mm)	588*463*205		
Net Weight(kgs)	13.1	14.2	14.5
Gross Weight(kgs)	14.1	15.7	16.0
INTERFACE			
Communication Port	RS232/ WIFI/Remove LCD/GPRS		
ENVIRONMENT			
Operating Temperature	-10~50℃		