

MSD600M-156

Mono Half-cut Single/Double Glass Module

580-600/MB Series

INTRODUCTION


MONO half-cut single / double glass module, assembled with multi-busbar PERC technique and half-cut structure, which can not only absorb the energy from the front of the module, but also absorb the reflected light and the scattered light from the back, offer the advantages of higher power output, reduce shading effect on the energy generation, enhance the mechanical load bearing capacity as well.

LCOE save 6-8%

- ↓6% Saving logistics cost
- ↓7% Saving cable cost
- ↓8% Saving bracket cost
- ↓9% Saving labor cost


First-class Quality Assurance

- 10-year warranty for material and technology
- 25-year linear power output warranty

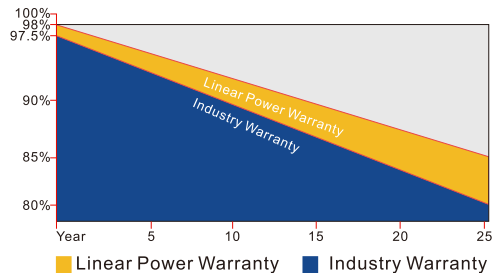

Comprehensive Certificates

- IEC61215, IEC61730
- ISO9001:2015 Quality management systems
- ISO45001: Environmental management systems
- ISO45001:2018 Occupational health and safety management systems

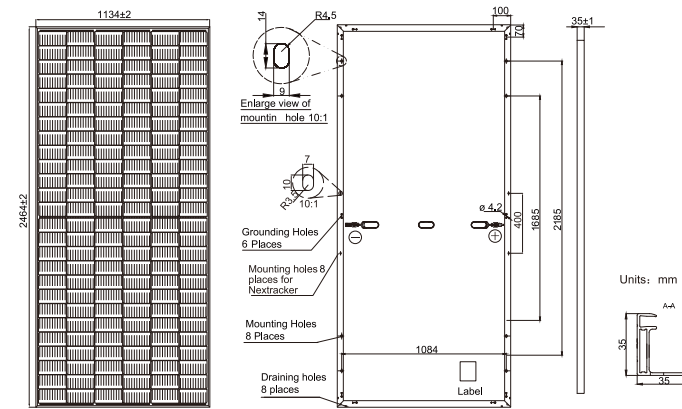

PS: Frame color and cable length can be customized

Electrical Parameters at STC

Module Type	MSD580P	MSD585P	MSD590P	MSD595P	MSD600P
Rate Maximum Power(Pmax/W)	580	585	590	595	600
Module Efficiency(%)	20.70	20.90	20.10	21.30	21.50
Open Circuit Volatge(Voc/V)	53.50	53.65	53.80	53.95	54.10
Short Circuit Current(Isc/A)	13.82	13.89	13.96	14.03	14.10
Voltage at Pmax(Vmp/V)	44.90	45.07	45.22	45.39	45.53
Current at Pmax(Imp/A)	12.92	12.98	13.05	13.11	13.18
Power Tolerance	0~+5w				
Temperature Coefficient of Isc	+0.046%/°C				
Temperature Coefficient of Voc	-0.276%/°C				
Temperature Coefficient of Pmax	-0.350%/°C				
STC	Irradiance 1000W/m ² Cell Temperature 25°C AM1.5				


Remark: Electrical data in this catalogue does not refer to a single module, and it's not part of the offer. It only serves for the comparison among different module types.

Electrical Parameters at NOCT


Module Type	MSD580P	MSD585P	MSD590P	MSD595P	MSD600P	Operating Conditions	
Rate Maximum Power(Pmax/W)	438	441	445	448	452	Operating Temperature	-40~+85°C
Open Circuit Voltage(Voc.V)	50.09	50.22	50.35	50.48	50.60	Maximum System Voltage	1500VDC
Short Circuit Current(Isc/A)	11.03	11.08	11.12	11.17	11.22	NOCT	45±2°C
Voltage at Pmax(Vmp/V)	42.03	42.17	42.39	42.51	42.73	Fireproof Performance	Glass C
Current at Pmax(Imp/A)	10.42	10.46	10.50	10.54	10.58	Maximum Series Fuse	25A
NOCT: Irradiance 800W/m ² Ambient Temperature 20°C Wind at 1m/S AM1.5						Temperature Coefficient of Voc	-0.276%/K
						Temperature Coefficient of Isc	+0.046%/K

Characteristics

Current Voltage Curve MSD600P



Power Voltage Curve MSD600P



Current Voltage Curve MSD600P

