




SpolarPV
Easy Invest, More Returns

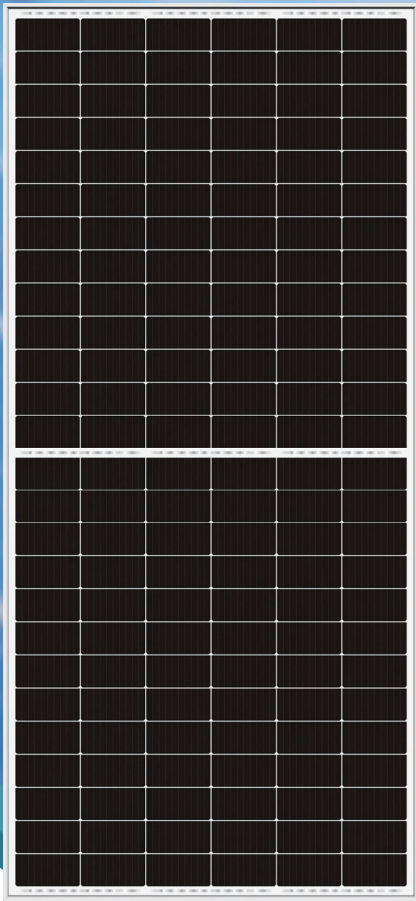

21.85 %

Module efficiency

610 W

Highest power output



Product warranty



Linear power warranty

SPV610-PM10-156

585-610Watt



High Efficiency

Higher power conversion efficiency benefited from advanced Passivated Emitter and Rear Cell (PERC) technology.



Anti-reflection

Less than 20% reflectivity with minimum glare.



Low-light Performance

Certified to withstand: wind load (2400 Pa), snow load (5400 Pa) and hail strike.




Severe Weather Resilience

Advanced glass and cell surface texture designs ensure excellent performance in low environment.



Durability against extreme environmental conditions

High salt mist resistance certified by IEC 61701, suitable for coastal areas.

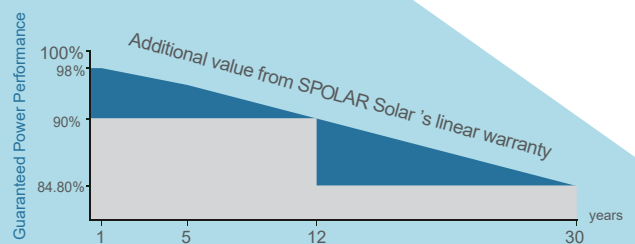

■ Linear performance warranty ■ Standard performance warranty



ISO9001:2016 ISO14001:2016
OHSAS18001:2011 certified factory.
IEC61215 IEC61730 certified products.


Electrical Characteristics at Standard Test Conditions (STC)

Module Type	SPV585-PM10-156	SPV590-PM10-156	SPV595-PM10-156	SPV600-PM10-156	SPV605-PM10-156	SPV610-PM10-156
Maximum Power - Pmax (W)	585	590	595	600	605	610
Maximum Power Voltage - Vmp (V)	45.68	45.87	46.04	46.19	46.36	46.64
Maximum Power Current - Imp (A)	12.81	12.87	12.93	12.99	13.05	13.08
Open-circuit Voltage - Voc (V)	54.92	55.18	55.45	55.63	55.86	56.19
Short-circuit Current - Isc (A)	13.57	13.62	13.67	13.74	13.81	13.84
Module Efficiency STC (%)	20.95 %	21.13 %	21.31 %	21.49 %	21.67 %	21.85 %


Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Module Type	SPV585-PM10-156	SPV590-PM10-156	SPV595-PM10-156	SPV600-PM10-156	SPV605-PM10-156	SPV610-PM10-156
Maximum Power - Pmax (W)	440	443	448	452	455	459
Maximum Power Voltage - Vmp (V)	42.92	43.09	43.29	43.50	43.62	43.88
Maximum Power Current - Imp (A)	10.24	10.30	10.35	10.39	10.43	10.46
Open-circuit Voltage - Voc (V)	51.71	51.89	52.10	52.47	52.56	52.87
Short-circuit Current - Isc (A)	10.85	10.91	10.95	10.99	11.04	11.07
Power Tolerance	0 ~ +3W		Operating Temperature (°C)		-40 °C ~ +85 °C	
Temperature Coefficients of Pmax	-0.35% / °C		Maximum System Voltage		1500 V	
Temperature Coefficients of Voc	-0.275% / °C		Maximum Series Fuse Rating		25 A	
Temperature Coefficients of Isc	0.045% / °C		Nominal Operating Cell Temperature		45 ± 2 °C	

Current-Voltage Curve under different irradiance




Current-Voltage Curve under different working temperatures



Mechanical Characteristics

Cell Type	Mono-crystalline PERC 182x91 mm
No. of Cells	156 (6x26)
Dimensions	2464x1133x30 mm
Weight	28.5 kg
Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, MC4 Compatible, 3 Bypass Diode
Output Cables	1x4.0 mm ² , Length: 300 mm or Customized Length
Packaging Configuration	62pcs/stack, 620pcs/40'HQ Container (Two pallets=One stack)

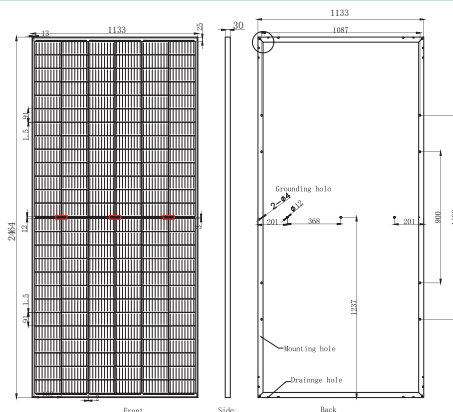

www.spolarpv.com