


# MONOCRYSTALLINE SILICON MODULE



# M6-135 M6-140 M6-145 MONOCRYSTALLINE SILICON MODULE

## Products Characteristics

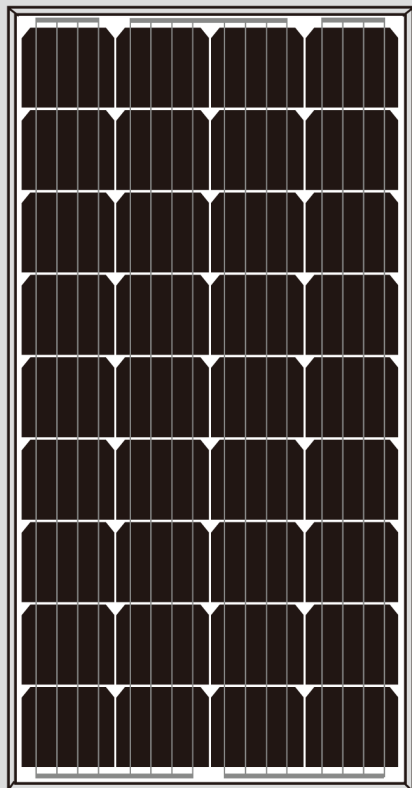

Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w



**10** years  
products  
warranty

**25** year  
power output  
warranty

Add: RM 1611B 16/F HO KING COMM CTR,2-16  
FA YUEN ST MONGKOK KLN, HONG KONG

Factory Add: HENGLIN TOWN, WUJINDISTRICT  
DISTRICT, CHANGZHOU, JIANG SU, CHINA

Tel: +852 3069 6900

Mail: info@linkingsolar.com

## Warranty

- 10 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

## Comprehensive Certificates


- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215、IEC61730 Certificate
- CE Certificate

Specifications subject to technology and test conditions,  
LINKING SOLAR reserves the right of final interpretation


# M6-135 M6-140 M6-145



Engineering Drawings(Front Side)

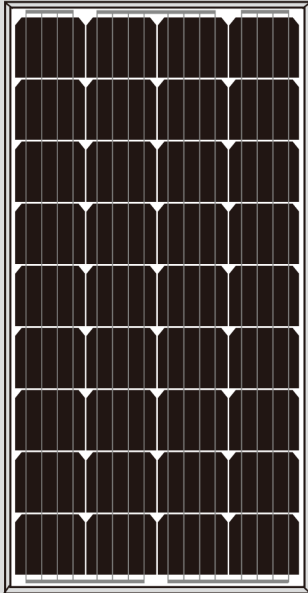

Engineering Drawings(Back Side)

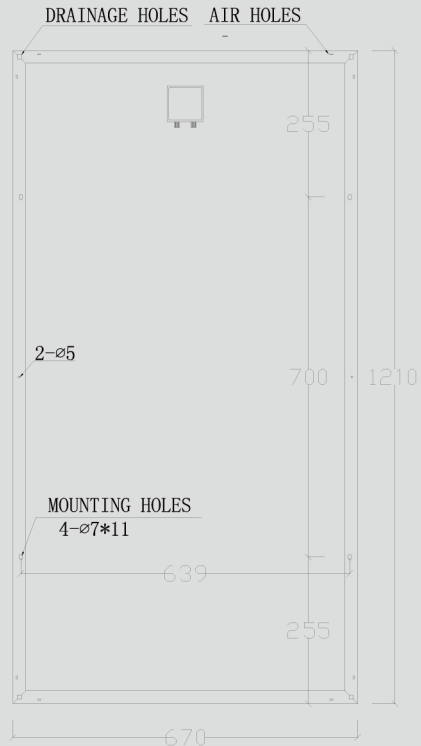

Add: RM 1611B 16/F HO KING COMM CTR,2-16  
FA YUEN ST MONGKOK KLN, HONG KONG  
Factory Add: HENGLIN TOWN, WUJINDISTRICT  
DISTRICT, CHANGZHOU, JIANG SU, CHINA  
Tel: +852 3069 6900  
Mail: info@linkingsolar.com

## Raw materials and Mechanical Parameters

	6M-135	6M-140	6M-145
Type of Cells(mm)	mono156.75 × 125.4		
NO. of Cells and Connections	4 × 9=36		
Dimensions(mm)(L*W*H)	1210 × 670 × 30		
Weight(kg)	9.1		
Glass	3.2mm Tempered Glass		
Encapsulation	EVA		
Backsheet	Multilayer Composite		
Aluminium-Frame	Silvery/Black Anodized aluminium alloy		
Junction-Box	IP65/IP67		
Cable	NA, but customized is acceptable		
Connector	NA, but MC4 and MC4 Compatible are acceptable		
Package Configuration	4pcs/ctn		

## Performance Parameters

	6M-135	6M-140	6M-145
Maximum System Voltage	700V		
Operating Temperature	-45~+80°C		
Maximum Series Fuse	10A		
Maximum Static Load,Front Side (e.x. Snow,Wind)	5400Pa		
Maximum Static Load, Back Side(e.x. Wind)	2400Pa		
Application Grade	Class A		

## Electrical Parameters (standard Test Condition)

	6M-135	6M-140	6M-145
Rated Maximum Power(Mp)	135W	140W	145W
Power Tolerance	0- +5W		
Cell Efficiency	19.5%	20.3%	21.1%
Open Circuit Voltage(Voc)	22.7V	22.8V	22.9V
Maximum Power Voltage(Vmp)	18.6V	18.8V	19.1V
Short Circuit Current(Isc)	7.69A	7.89A	8.05A
Maximum Power Current(Imp)	7.26A	7.45A	7.59A
Temperature Coefficient of Isc	+0.06%		
Temperature Coefficient of Voc	-0.32%		
Temperature Coefficient of Pmp	-0.45%		
Standard Test Condition	Irradiance:1000WM2,Cell Temperature:25°C,Spectrum AM:1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.