


Three Phase STORAGE SYSTEM

PRODUCT MODEL

INVERTER	■ PC-INV-TPH4K
	■ PC-INV-TPH5K
	■ PC-INV-TPH6K
+	
BATTERY	■ PC-BAT-4.8S / PC-BAT-9.6P

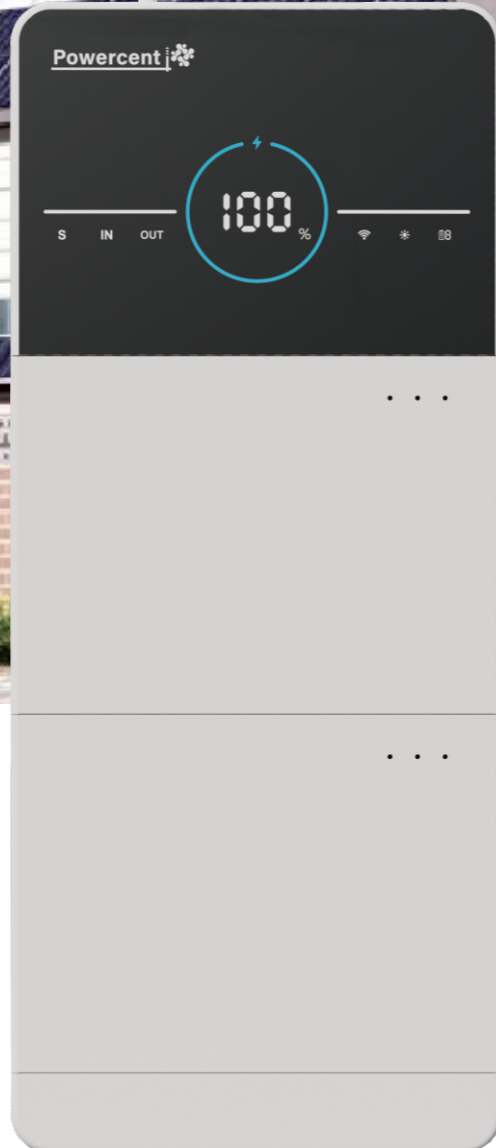

HIGH PERFORMANCE

- 200% PV over management;
- 200% backup overload capacity, 50A battery current;
- Max. efficiency 98%, Battery efficiency 96%;
- Load monitoring accuracy 10W, Battery discharging threshold 10W;

HIGH RELIABILITY

- UPS level redundant protection against backup load breakdown;
- Three-level firmware and two-level hardware battery protection;
- Multiple temperature monitoring, delicate thermal management;
- Max. 6 Inverters in parallel to increase power availability.

HIGH INTELLIGENCE

- Internal EMS optimizes home energy supply automatically;
- PV production forecast;
- Built-in electric power service, FCAS, VPP, etc.;
- Online monitoring, online diagnosis, online service.

INVERTER MODEL	PC-INV-TPH4K	PC-INV-TPH5K	PC-INV-TPH6K
PV INPUT			
Max. PV Input Power	8kW	10kW	12kW
Max. PV Input Voltage	1100V		
MPPT Range	140~950V		
Max. Input Current	16A / 16A / 16A		
Max. Short Circuit Current	24A / 24A / 24A		
MPPT Trackers	3		
Strings Per MPPT Tracker	1 / 1 / 1		
AC PORT			
Rated Grid Output Power	4kVA	5kVA	6kVA
Max. Grid Input Power	8kVA	10kVA	12kVA
Rated Grid / Backup Voltage	220/380Vac, 230/400Vac, 3/N/PE		
Rated Grid / Backup Frequency	50 / 60Hz		
Surge Backup Power	8kVA / 8kW	10kVA / 10kW	12kVA / 12kW
Rated Backup Power	4kVA	5kVA	6kVA
THDi	<3%		
THDv	<3% (Linear Load) / <5% (Non-linear Load)		
DCV	<100mV		
Crest Ratio	3:1		
Transfer Time	<10ms		
EFFICIENCY			
Max. Efficiency	98%	98%	98.2%
Max. Round Trip Efficiency	96%		
GENERAL DATA			
Operating Temperature Range	-20~60 °C		
Topology	Transformerless		
Dimensions (W*H*D)	590x416x205mm		
Weight	25kg		
Load Monitoring	Meter / CT / Backup box		
External Communication	RS-485 / WIFI / 4G / Ethernet		
Grid Regulation	VDE-AR-N 4105:2018, G98, G99, C10/11:2021, NTS 631, RD647:2020 UNE 217002:2020, CEI 0-21, VDE 0126-1-1, NRS 097-2-1, AS/NZS 4777.2:2020, EN 50549-1		
Safety Regulation	IEC/EN 62109-1&2, IEC/EN 62477-1:2012		

BATTERY MODEL	PC-BAT-4.8S	PC-BAT-9.6P
Battery Type	LFP	
Battery Capacity	4.8kWh	9.6kWh
Usable Capacity	4.6kWh	9.1kWh
Depth of Discharge (DoD)	95%	
Nominal Battery Voltage	96V	
Operating Voltage Range	90~108V	
Max. Charging Current	50A	
Max. Discharging Current	50A	
Operating Temperature Range	Charge:0<T<50 °C / Discharge:-10<T<50 °C	
Cycle Lifetime	8000	
Series/Parallel	1~6 in Series	1~6 in Parallel
Dimensions (W*H*D)	590x430x205 mm	590x730x205 mm
Weight	39.2kg	86kg
Communication	CAN / RS-485 (Optional)	
Safety Regulation	IEC 62619:2017, IEC 62040:2017	
Transportation	UN38.3	

SYSTEM	
Operating Altitude	≤3000m (>3000m Derating)
Relative Humidity	0~95% (No Condensing)
Protection Degree	IP65
Cooling	Natural Convection
Noise	<30dB
Warranty	5 years / 10 years
EMC	IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, IEC/EN 61000-6-4

Note: Specifications are subjected to change without advance notice.