

# CDZ-S120/M6H Full Black Series

# 355-380w

166mm CELL HALF CUT MONOCRYSTALLINE



## Product Advantages



### High Efficiency

Module efficiency leading in industry, up to 20.4%



### Excellent loading capability

2400Pa wind loads, 5400Pa snow loads, 8000Pa extra support



### High Reliability

Passed 3\*IEC standard test



### Low NMOT

As low as 43°C, improving the power generation efficiency



### Low Hot-spot Risk


1/2 current, reducing the hot spot temperature



### Half Cell, MBB Technology

Series-then-parallel cell connection design, more reliable soldering technology

## Product Guarantee

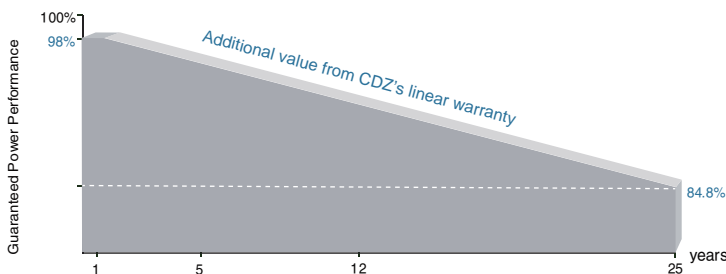

**380W**

Highest Power Output



**12 Years**

Product Warranty

**20.8%**

Module Efficiency



**25 Years**

Linear Power Warranty

**-2.50%**

First year power degradation

**-0.55%**

Annual degradation

## Product Certification



# CDZ-S120/M6H

## Electrical Characteristics

STC	355	360	365	370	375	380
Maximum Power at STC (Pmax)*	355W	360W	365W	370W	375W	380W
Optimum Operating Voltage (Vmp)	33.7V	33.9V	34.1V	34.3V	34.5V	34.7V
Optimum Operating Current (Imp)	10.54A	10.62A	10.71A	10.79A	10.87A	10.96A
Open Circuit Voltage (Voc)	40.3V	40.5V	40.7V	40.9V	41.1V	41.3V
Short Circuit Current (Isc)	11.28A	11.35A	11.42A	11.49A	11.56A	11.63A
Module Efficiency	19.4%	19.7%	20.0%	20.2%	20.5%	20.8%
Operating Module Temperature	-40 °C to +85 °C					
Maximum System Voltage	1500 V DC (IEC)					
Maximum Series Fuse Rating	20 A					
Power Tolerance	0~+5W					

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; \*Measuring tolerance:±3%

NMOT	355	360	365	370	375	380
Maximum Power at NMOT (Pmax)	266.8W	270.7W	274.3W	278.2W	281.8W	285.4W
Optimum Operating Voltage (Vmp)	31.5V	31.6V	31.8V	32.0V	32.2V	32.4V
Optimum Operating Current (Imp)	8.48A	8.56A	8.62A	8.69A	8.75A	8.81A
Open Circuit Voltage (Voc)	38.2V	38.4V	38.5V	38.7V	38.9V	39.1V
Short Circuit Current (Isc)	8.96A	9.04A	9.1A	9.17A	9.23A	9.29A

NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;

## Temperature Characteristics


Nominal Module Operating Temperature(NMOT)	42±2°C
Temperature Coefficient of Pmax	-0.34 %/°C
Temperature Coefficient of Voc	-0.25 %/°C
Temperature Coefficient of Isc	0.040 %/°C

## Mechanical Characteristics

Solar Cell	Monocrystalline silicon 166 mm (9BB)
No. of Cells	120 (6 × 20)
Dimensions	1756 × 1039 × 30mm
Weight	19.5 kgs
Front Glass	3.2 mm tempered glass with AR coating
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	4.0 mm <sup>2</sup> , cable length 350mm or customized length

## Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	36	36+2
Pallets per container	6	26
Pieces per container	216	988

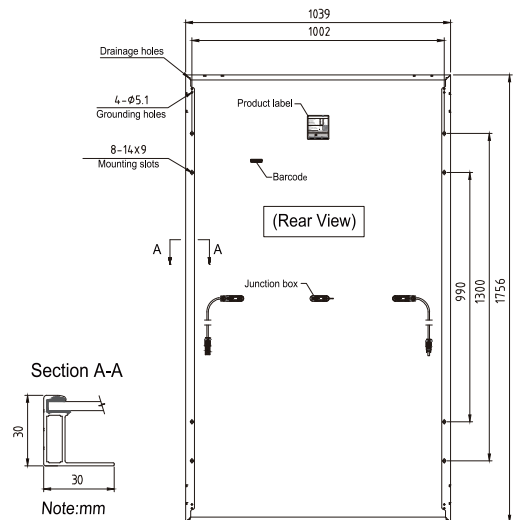

Current-Voltage & Power-Voltage Curve (370)

