


Deutsche
Qualität
Garantiert

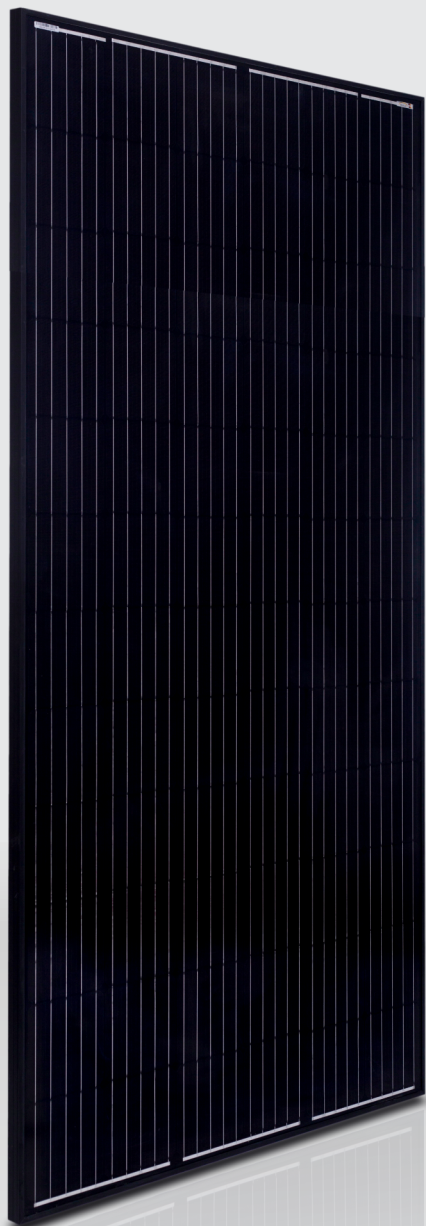

FULL BLACK

Driven by innovation

30
years
Performance
Guarantee

15
years
Product
Warranty

30
years
Performance
Guarantee


15
years
Product
Warranty

MONO-CRYSTALLINE PV MODULES
FULL CELLS • MONO-FACIAL

385W-395W
AE MB-72 Series

Mechanical and design specification

Cell type	Mono c-Si PERC, Full cells, 158.75mm
No. of cells	72
Glass	3,2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	Black Backsheet
Junction box	IP 68 rated
Frame	35 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1979 mm x 996 mm x 35 mm
Weight	21 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m ²
Mechanical load	5400 Pa/ 550 kg/ m ²





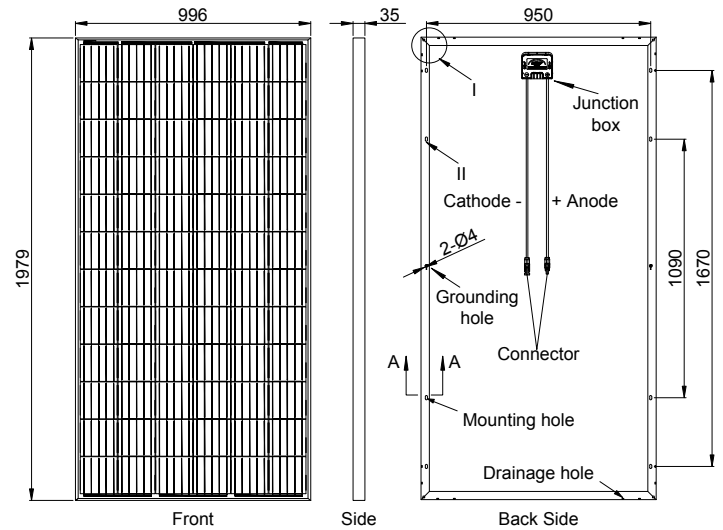


Packaging information

Packaging configuration	64 pcs / double pallet
Loading capacity	704 pcs / 40 HQ
Size / Pallet	2015 mm x 1120 mm x 2395 mm
Weight	1464 kg / double pallets

Temperature ratings

Operating temperature (°C)	-40 to +85
Temp. coefficient of P _{max} (%/°C)	-0.37
Temp. coefficient of V _{oc} (%/°C)	-0.28
Temp. coefficient of I _{sc} (%/°C)	0.048
Nom. operating temp. NOCT (°C)	45 ± 2

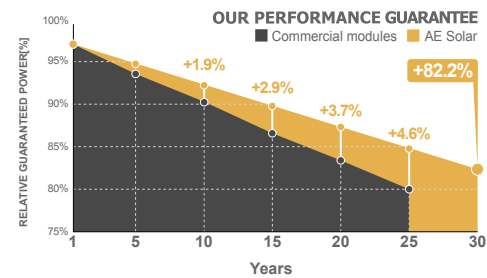

Electrical specifications (STC*):	AE385MB-72	AE390MB-72	AE395MB-72	
Nominal Max. Power	P _{max} (Wp)	385	390	395
Maximum operating voltage	V _{MPP} (V)	40.80	41.10	41.40
Maximum operating current	I _{MPP} (A)	9.44	9.49	9.54
Open-circuit voltage	V _{oc} (V)	49.10	49.30	49.48
Short-circuit current	I _{sc} (A)	9.92	10.12	10.50
Module efficiency	η (%)	19.53	19.79	20.04
Power tolerance	(W)		0~+5	
Maximum system Voltage	(V)		1500	
Maximum series fuse rating	(A)		15	

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):	AE385MB-72	AE390MB-72	AE395MB-72	
Nominal Max. Power	P _{max} (Wp)	288	291	294
Maximum operating voltage	V _{MPP} (V)	38.10	38.30	38.50
Maximum operating current	I _{MPP} (A)	7.55	7.59	7.63
Open-circuit voltage	V _{oc} (V)	46.70	46.90	47.10
Short-circuit current	I _{sc} (A)	7.94	8.10	8.40

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.

