


Stackable Battery 5KWh - 30KWh

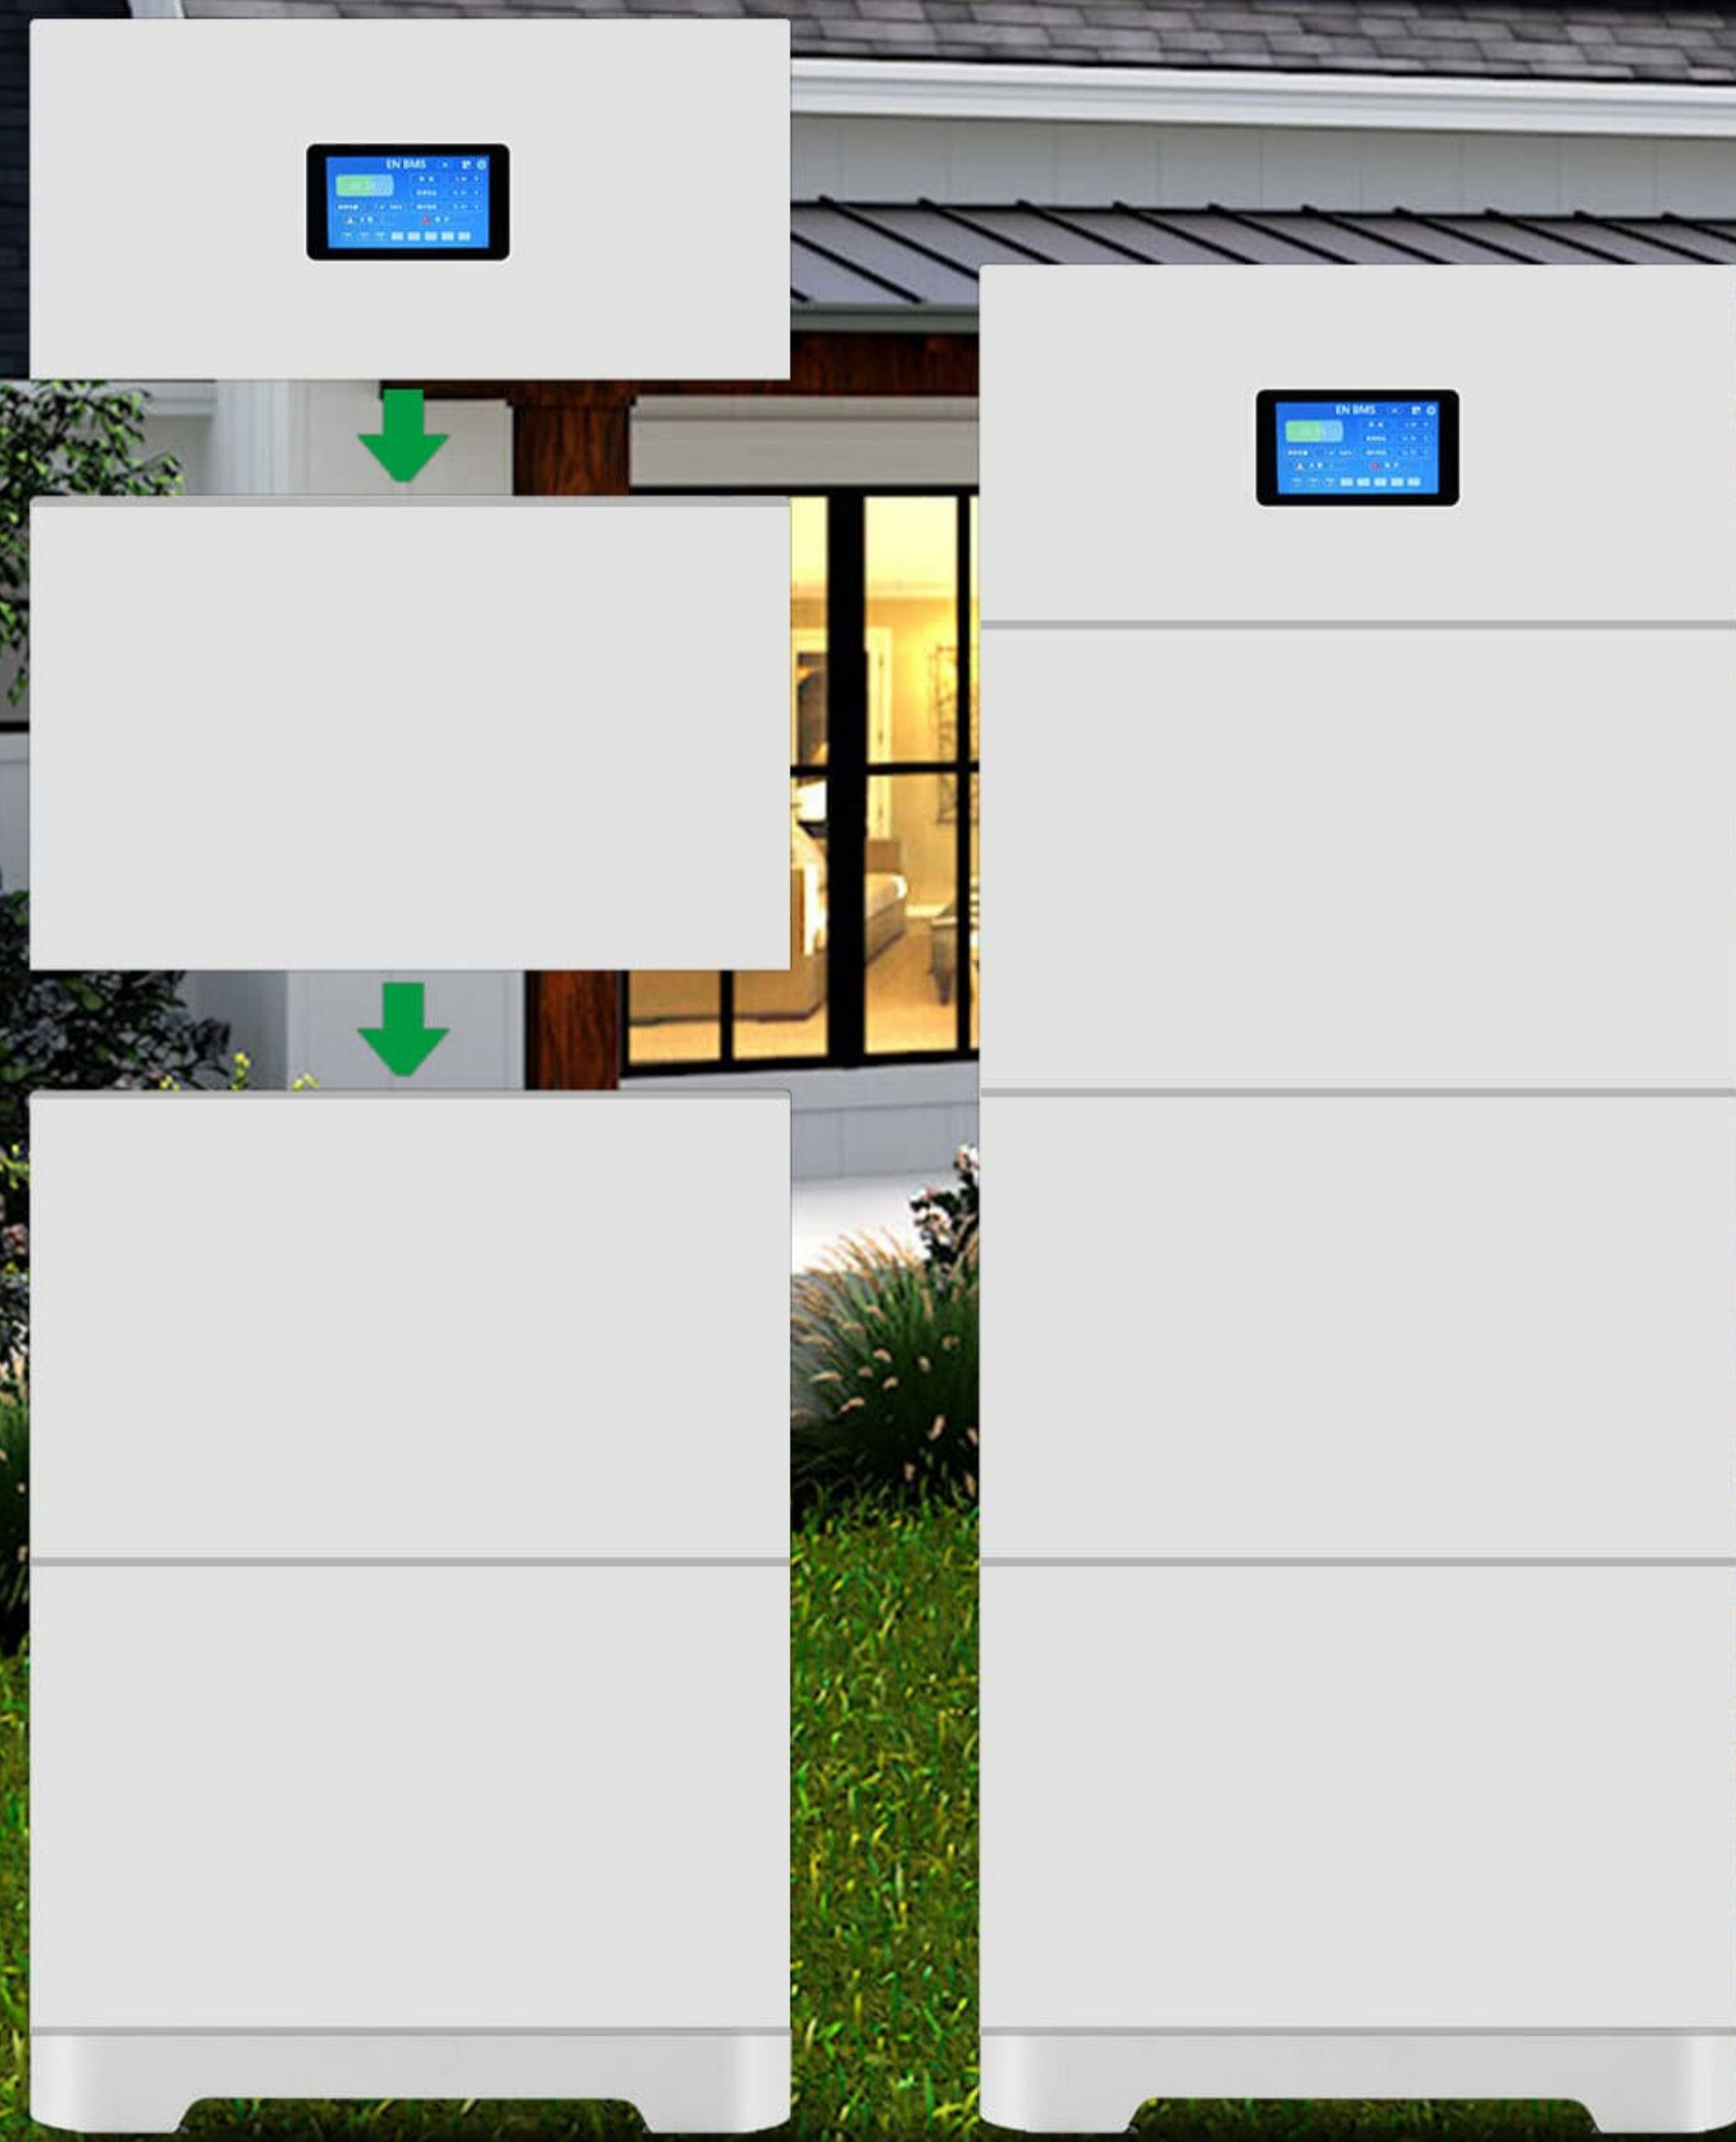

 **HHS ENERGY** SINCE 2004


Product advantages:

- Support a variety of communications, can communicate with a variety of inverters;
- Products cover 5-30KWH capacity segment;
- The product supports parallel connection and expansion;
- Simple appearance design, easy installation;


Application scenarios:




Family

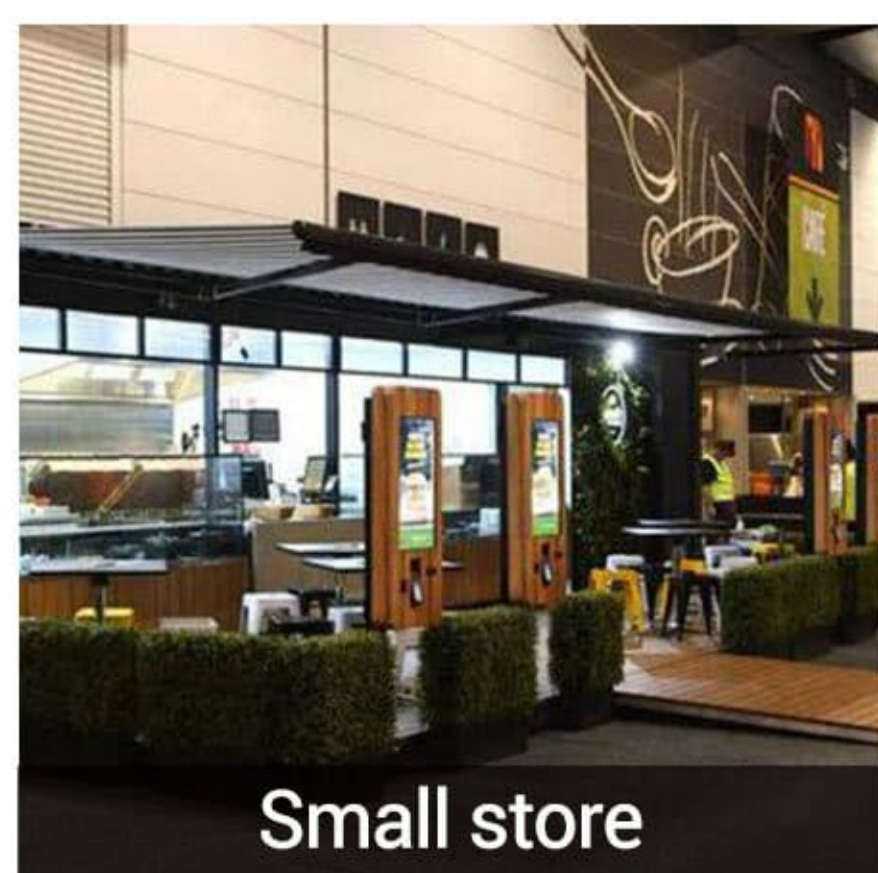

Small store

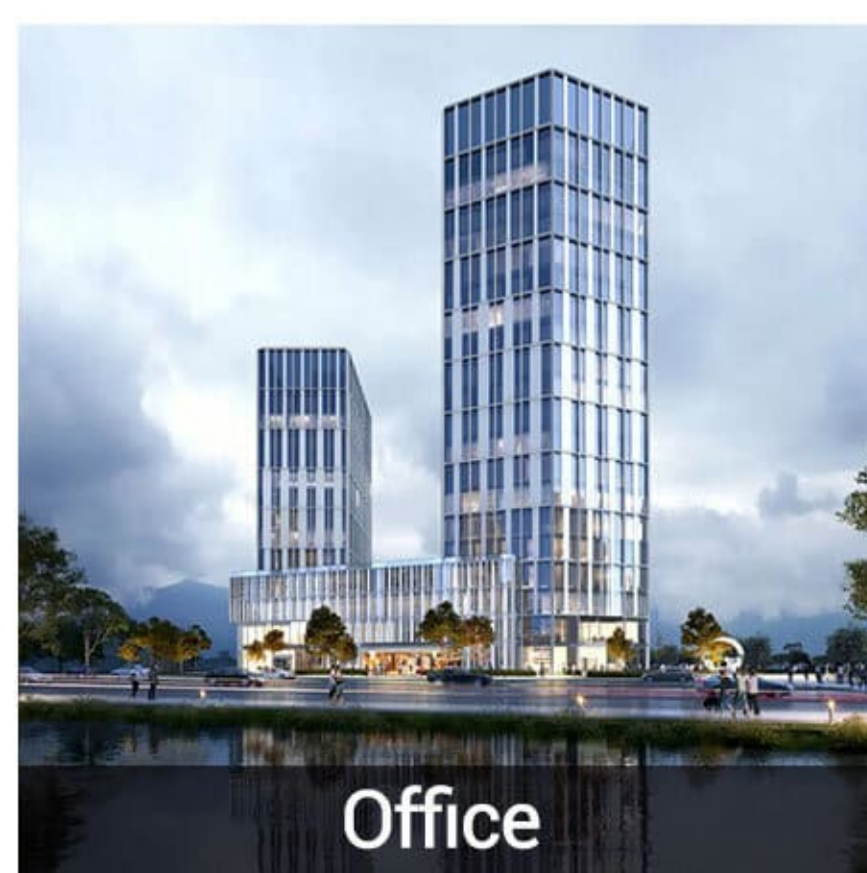

Office

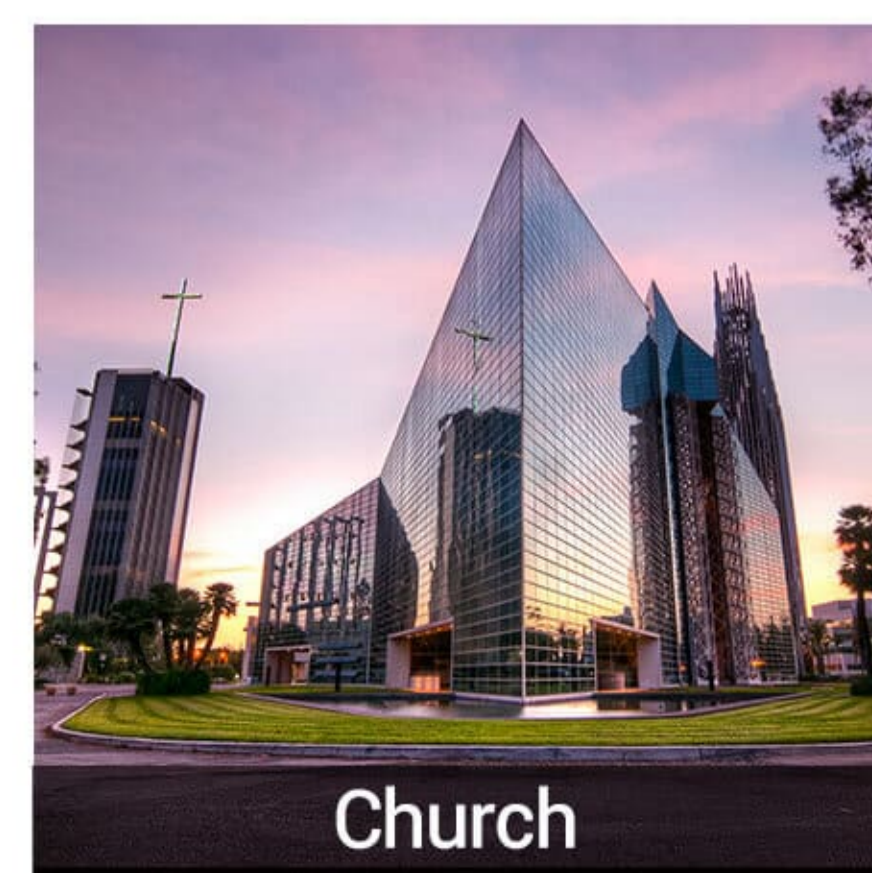


Church

Product Specifications



HHS ENERGY

**SINCE
2004**

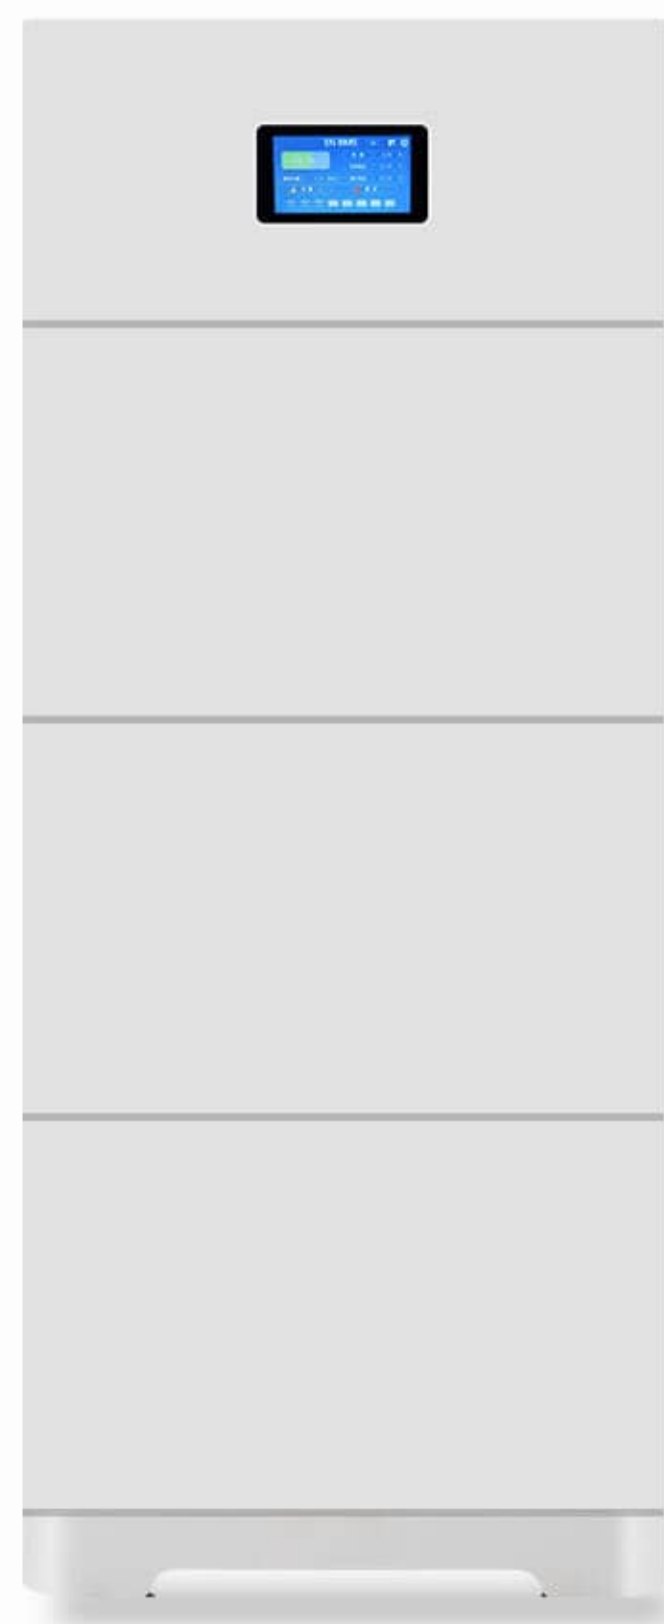

Model	HHS-STW48300	HHS-STW48600
Nominal Voltage	51.2V(16series)	51.2V(16series)
Capacity	300Ah	600Ah
Energy	15.36KWh	30.72KWh
Internal Resistance	≤40mΩ	
Cycle Life	≥6000cycles@80%DOD,25°C, 0.5C	
Design Life	≥10 years	
Charge Cut-off Voltage	58.4V	58.4V
Max. Continuous Work Current	300A	600A
Discharge Cut-off Voltage	40V	40V
Charge Temperature	0°C~55°C	
Discharge Temperature	-20°C~60°C	
Storage Temperature	-40°C~55°C @ 60%±25% relative humidity	
Dimensions	1370*598*162 mm	1670*598*182 mm
Weight	153Kg	261Kg
Protocol (optional)	RS232-PC,RS485(B)-PC RS485(A)-Inverter,Canbus-Inverter	
Certification	CE, UN38.3, MSDS, DGM Report	