



ZERO BALLAST - COST EFFICIENT - EASY TO INSTALL

ANCHORRACK[®] has been designed to eliminate rooftop ballasting and provide a system both affordable and favorable to weight-challenged roofs. Wood screws penetrate the roof surface to create a secure attachment against high wind loads while high-grade flashing allows for a permanent seal against the elements.

ANCHORRACK[®]'s installation is made simple with pre-punched screw holes, click-in module clamps, and lightweight aluminum components. The durable components are built-to-last with flexibility in tilt angle, row spacing and panel orientation, making it the most modular anchored systems on the market.




FEATURES

- Conforms to UL standard 2703
- Fully anchored rooftop mounting solution with zero ballast
- Designed based on SEAOC's wind design guidelines for solar arrays
- Only 2 main components for rapid installation
- Durable flashing for a long-lasting, permanent seal
- 5" roof clearance to allow for rooftop obstacles
- Easy panel mounting with self-grounding, click-in module clamps
- 25-year standard product warranty, extended warranty available







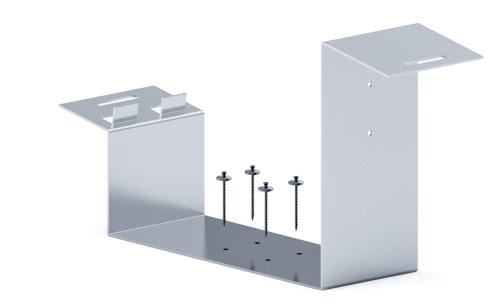

TECHNICAL

SPECIFICATIONS

5°,
Up
All
ET
Pre
La
Co
Up
All
Up
Al
49

ıs	5°, 10°, 12°, 15°
d	Up to 170mph for Exposure B; 117mph for Exposure C
es	All standard 60, 72 & 96 cell panels
d	ETL certified grounding clamps, grounded only once per array
g	Pre-attached tape and liner with secondary LPS sealant
n	Landscape / Portrait
n	Conforms to UL STD 2703. Certified to ULC/ORD STD C1703
nt	Up to 60' (18.3m), higher upon request
e	All types of flat roofs
h	Up to 45°
al	Aluminum, stainless steel fasteners and screws
g	49.2" - 58.3" / 1.25m - 1.48m, Custom row spacing available.







MADE IN CANADA

www.kbracking.com • 1.888.661.3204 • info@kbracking.com