

ANDROMEDA

SPICN6(LFL)-60/IH

355W | 360W | 365W




10 year product warranty



25 year performance warranty

FEATURES

- Up to 20.2% Efficiency
- Ultra Flexible and Weight reduced more than 70%
- Installation cost reduced about 50%
- IBC-No electrode to block sunlight
- N-Type cell has ZERO LID
- Excellent Temperature Coefficient
- Minimal power degradation (90.1% of initial after 25years)

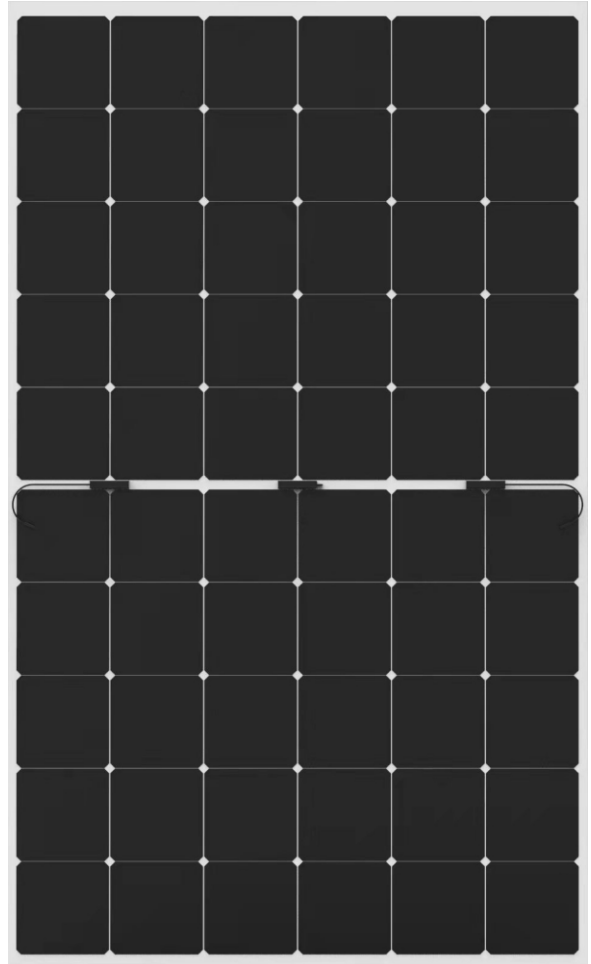

About SPIC

State Power Investment Corporation (SPIC)- FORTUNE GLOBAL 500 company ,one of the integrated energy group in China that holds assets of hydropower ,thermal power, nuclear power and new energy simultaneously .Own and operate over 33GW photovoltaic projects, ranking first in the world (As of end 2020).



20.2%
MAX MODULE
EFFICIENCY

<1.5%
FIRST YEAR
POWER DEGRADATION

-0.35%
YEAR 2-25
POWER DEGRADATION


90.1%
25-YEAR
POWER WARRANTY

IBC Flexible Series
Higher Efficiency and Lower Degradation


Electrical Parameters

Module Type	SPICN6(LFL)-60-355/IH		SPICN6(LFL)-60-360/IH		SPICN6(LFL)-60-365/IH	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	355	265	360	269	365	273
Maximum Power Voltage (Vmpp/V)	35.1	32.2	35.2	32.3	35.3	32.4
Maximum Power Current (Imp/A)	10.12	8.23	10.23	8.34	10.34	8.45
Open Circuit Voltage (Voc/V)	41.7	38.3	41.8	38.4	41.9	38.5
Short Circuit Current (Isc/A)	10.85	8.81	10.96	8.92	11.07	9.03
Module Efficiency	19.6%		19.9%		20.2%	

Additional Value

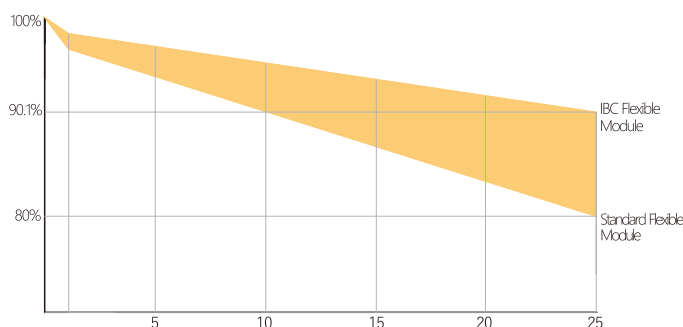

Dimensions(Units:mm)

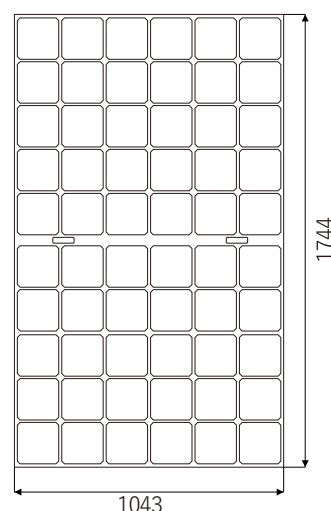

Mechanical Parameters

Cell Type	NIBC 166x83mm(Half-Cell)
No. of Cells	120(6x20)
Junction Box	Ip68
Output Cable	4mm ² , 300mm with MC4 (Length can be customized)
Encapsulation	Backsheet(White/Black)
Dimension	1744x1043x3mm
Weight	5±0.5kg


Operating Conditions

Maximum System Voltage	1500V DC(IEC)
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V (IEC)
Maximum Series Fuse Rating	20A

Temperature Characteristics (STC)

Pmax	%/°C	-0.290
Voc	%/°C	-0.246
Isc	%/°C	+0.046

I-V Curves(360W)

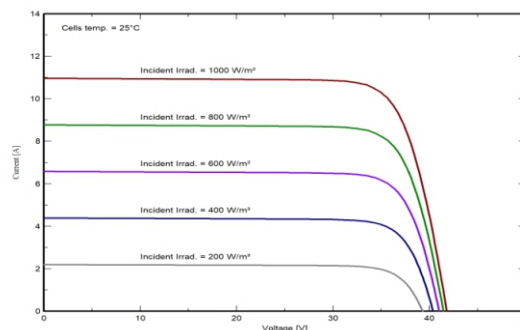

Packaging Configuration

No. of Modules Per Pallet	EA	36
No. of Modules Per 40ft HQ container	EA	864



SPIC Xining Solar Power Branch
No.4 Jinggui Road, Chengdong District, Xining City,
Qinghai Province, China

www.spicsolar.com
spicsolar@spic.com.cn

Product specifications are subject to change without notice

© 2021 SPIC Xining Solar Power Branch. All rights reserved