


SIV N-TOPCON SERIES

Small Changes, Big Accomplishments

420-435W

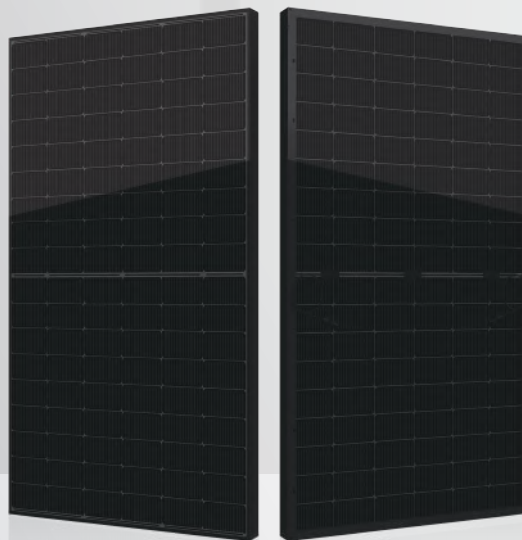

• N-TOPCON MODULE ADVANTAGE

-  Multi-main gate technology
-  Superior load capacity
-  High module conversion efficiency
-  Excellent low-light performance
-  Low attenuation long warranty
-  Low BOS and KWH cost
-  Reduce heat spot effect
-  Higher bifacially

• QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


• PRODUCT CERTIFICATION



• INSURANCE

PICC

• WARRANTY

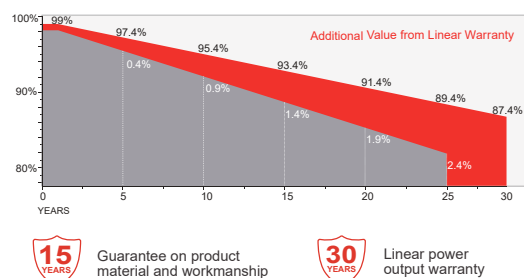

JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD

Add: No.10, TongshunRd, HenglinTown, Wujin District, 213000, Changzhou, China
 Tel: +86-519-68788166 Email: info@seraphim-energy.com

Mechanical Specifications

External Dimension	1722 x 1134 x 28 mm
Weight	18.5 kg
Solar Cells	N-TOPCon 182 x 91(108 pcs)
Front / Back Glass	1.6mm AR coating semi-tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ² , 250mm(+)/350mm(-) or Customized Length

Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	39	39
Pallets per Container	6	26
Pieces per Container	234	1014

Electrical Characteristics

Module Type	SRP-420-BTD-BG			SRP-425-BTD-BG			SRP-430-BTD-BG			SRP-435-BTD-BG		
	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC
Maximum Power -P _{mp} (W)	420	316	336	425	320	340	430	324	344	435	328	348
Open Circuit Voltage -V _{oc} (V)	38.50	36.58	38.48	38.70	36.77	38.68	38.90	36.96	38.88	39.10	37.15	39.08
Short Circuit Current -I _{sc} (A)	13.83	11.06	11.06	13.91	11.13	11.13	13.99	11.19	11.19	14.07	11.26	11.26
Maximum Power Voltage -V _{mp} (V)	31.90	29.99	31.88	32.10	30.21	32.08	32.30	30.41	32.28	32.50	30.62	32.48
Maximum Power Current -I _{mp} (A)	13.17	10.54	10.54	13.24	10.59	10.60	13.32	10.66	10.66	13.39	10.71	10.72
Module Efficiency STC-η _m (%)	21.51			21.76			22.02			22.28		
Power Tolerance (W)	(0, +4.99)											
Pmax Temperature Coefficient	-0.30 %/°C											
Voc Temperature Coefficient	-0.25 %/°C											
Isc Temperature Coefficient	+0.046 %/°C											

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
Power measurement tolerance: +/-3%


Rear Side Power Gain(SRP-420-BMB-BG)

Power Gain	10%	15%	20%	25%	30%
Maximum Power -P _{mp} (W)	462	483	504	525	546
Open Circuit Voltage -V _{oc} (V)	38.50	38.50	38.50	38.50	38.50
Short Circuit Current -I _{sc} (A)	15.21	15.90	16.60	17.29	18.00
Maximum Power Voltage -V _{mp} (V)	31.90	31.90	31.90	31.90	31.90
Maximum Power Current -I _{mp} (A)	14.49	15.15	15.80	16.46	17.12



Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Bifaciality	80%±5%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

Technical drawing

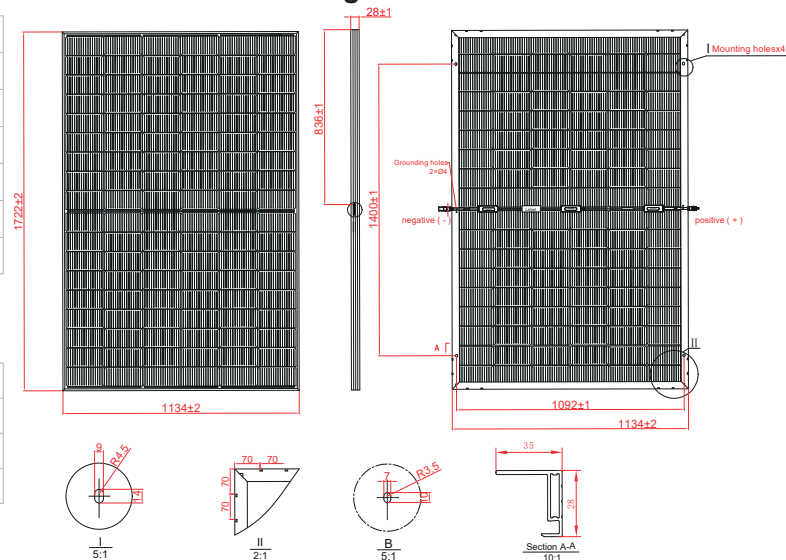

I-V Curve

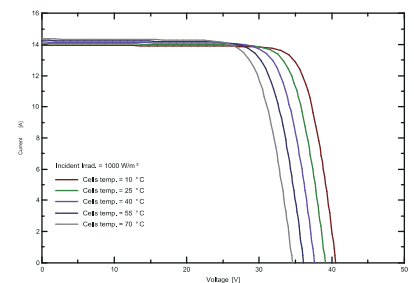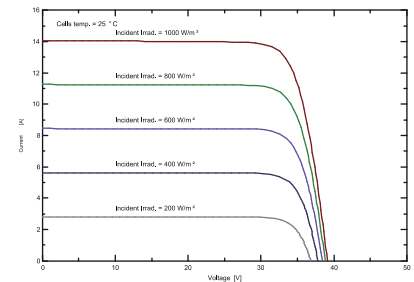

Specifications are subject to change without further notification SRP-DS-EN-2023V1.0 © Copyright 2023 Seraphim

JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD

Add: No.10, TongshunRd, HenglinTown, Wujin District, 213000, Changzhou, China
Tel: +86-519-68788166 Email: info@seraphim-energy.com

