

SF-M16/120

370-385W

166*83mm cells 60


Monocrystalline

PERC half-cell module

Max Power out:385W

Max Efficiency:21.13%

Power tolerance:0~+5W

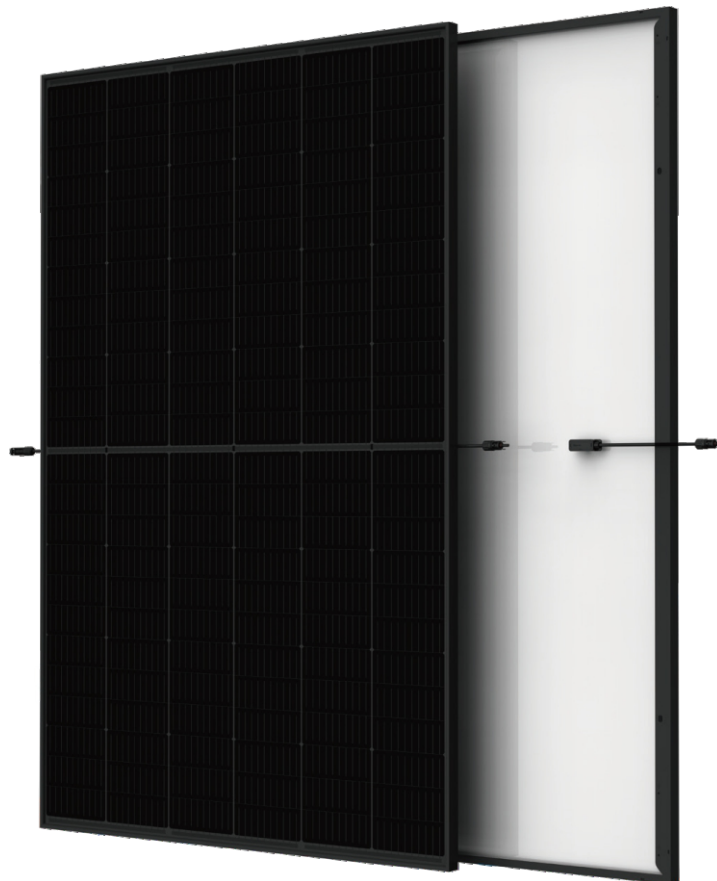

SMBB Technology

Better light trapping and current collection to improve module power output and reliability



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



Enhanced Mechanical Load

Certified to withstand:wind load (2400 Pascal) and snow load (5400 Pascal).




High energy generation, low LCOE

Low Pmax temp coefficient (-0.36%) increases energy production

Superior Warranty

- 15-year material&technology warranty
- 25-year linear power output warranty

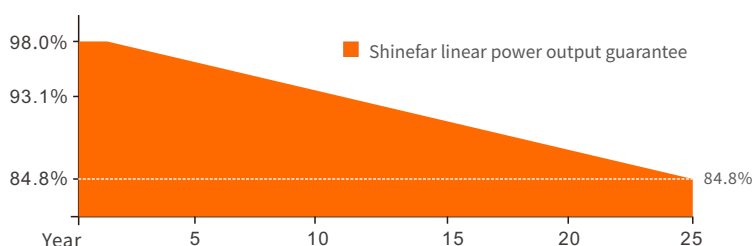


Comprehensive Products and System Certificates

- IEC 61215, IEC 61730, IEC 61701, IEC 62716
- ISO 9001:2015 Quality management systems
- ISO 14001:2015 Environmental management systems
- ISO 45001:2018 Occupational health and safety management systems



Engineering Drawings

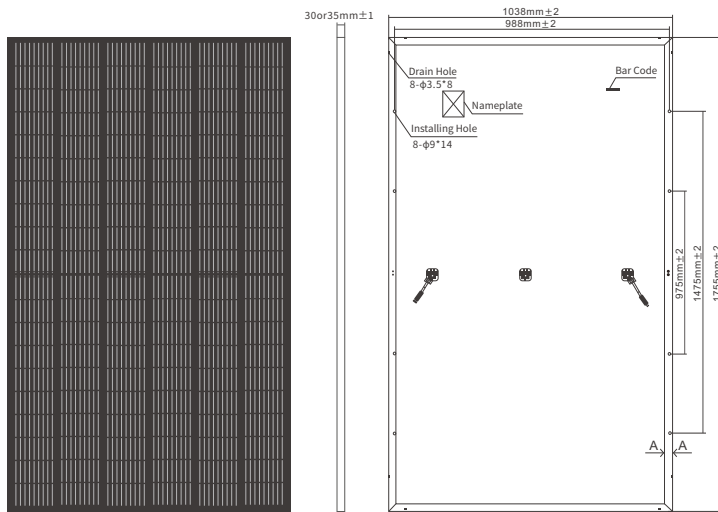

Front

Side

Back

Structural parameter

Dimensions of Module	1755x1038x30 or 1755x1038x35mm
Weight	20kg
packing	37/31/pallet,1053/884/40hq
Glass	High transparency solar glass 3.2mm
Backsheet	air-side white , cell-side High reflection black
Frame	Black, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm ² , 300mm
Bypass Diodes	3pcs
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

Electrical Specification

(STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M16/120370		SF-M16/120375		SF-M16/120380		SF-M16/120385	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	370	274.54	375	278.25	380	281.96	385	285.67
Maximum Power Voltage (Vmp) [V]	34.33	32.14	34.53	32.33	34.73	32.52	34.93	32.70
Maximum Power Current (Imp) [A]	10.78	8.54	10.86	8.61	10.94	8.67	11.02	8.74
Open Circuit Voltage (Voc) [V]	41.37	38.73	41.57	38.92	41.77	39.11	41.97	39.29
Short Circuit Current (Isc) [A]	11.31	8.96	11.38	9.02	11.45	9.07	11.52	9.13
Module Efficiency[%]	20.31		20.59		20.86		21.13	
Cell Type[mm]	Mono 166x83,120 cells							
Operational Temperature[°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	20A							

Temperature Ratings

Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.06%/°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Pmax	-0.39%/°C

Curve diagram

