


# 200 Watt

## ZM 200M10

182mm 64Cells PV Module

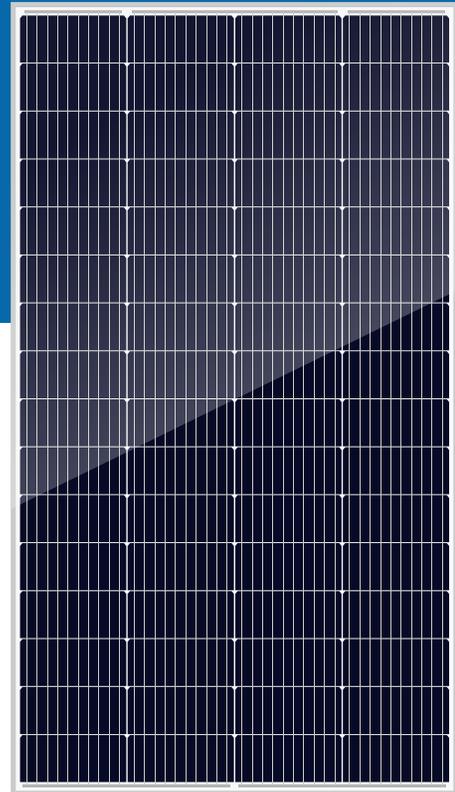

### Electrical Characteristics

Module Type	ZM 200M10
	STC
Maximum Power- Pmax(W)	200
Open Circuit Voltage - Voc(V)	21.79
Short- Circuit Current - Isc(A)	11.24
Voltage at Pmax -Vmp(V)	18.76
Current at Pmax - Imp(A)	10.66
Module Efficiency -ηm(%)	19.01
Power Tolerance(W)	0, +4.99W
Maximum System Voltage(V)	700Vdc (IEC / UL)
Maximum Series Fuse Rating (A)	15A

STC : Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C, Air Mass 1.5

### Mechanical Specifications

External Dimensions	1375*765*30mm
Weight	10.87kg
Solar Cells	Mono crystalline 182X81mm (4X16pcs)
Front Glass	3.2 mm tempered glass
Frame	Aluminum
Junction Box	IP67
Output Cables	90cm, length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

### Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.270%/°C
Isc Temperature Coefficient	+0.048%/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature(NOCT)	45±2 °C

### Packing Configuration

Module Type	ZM200M10
Module Dimensions	1375*765*30
Pallet Dimensions	1425*1100*885mm
Pallet Weight	425kg
Pieces/Pallet	36pcs

