

NORDIKA SERIES 690W / 710W

**NT6 N-Type
Ultra Black Bifacial**



Bifacial technology enables additional energy harvesting from rear side (up to 30%)



30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



N-type solar cell has no LID naturally which can increase power generation



Excellent low irradiance performance



Better light trapping and current collection to improve module power output and reliability




Industry leading lowest thermal co-efficient of power




Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient



100% triple EL test enabling remarkable reduction of hidden crack rate of modules

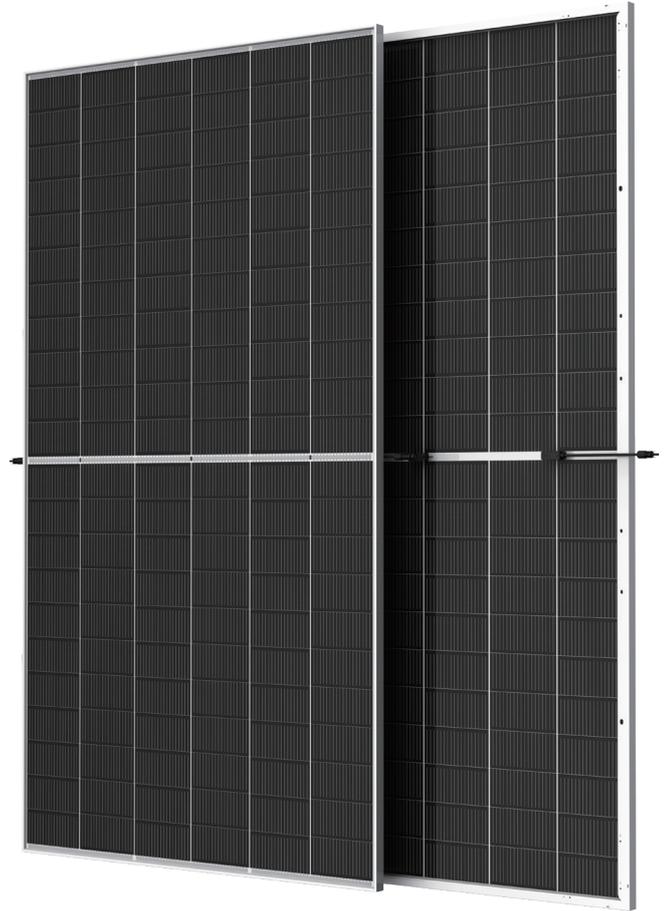

LINEAR PERFORMANCE WARRANTY

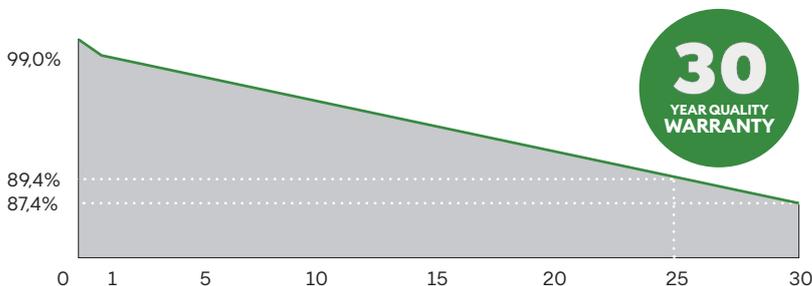

ABOUT OMNIS POWER

Omnis Power was founded in 2010 by a group of entrepreneurs with experience in the energy sector and a common idea: to innovate the renewable energy sector. Arising from several spin-offs of leading companies in the industry, Omnis Power is at the forefront of new technology research and competitive product development.

Today, Omnis Power is a European company with international experience that believes and invests Norway in addition to numerous partners around the world. in Europe. The increasingly strong group already has offices in Italy, Lithuania, Estonia, Germany and Norway in addition to numerous partners around the world.

ELECTRIC CHARACTERISTICS

NT6 N-TYPE 685/710 W BF

Model of modules	OP690M66-NT6-BF		OP695M66-NT6-BF		OP700M66-NT6-BF		OP705M66-NT6-BF		OP710M66-NT6-BF	
	STC	NOCT								
Maximum power — P_{mp} (W)	690	521.7	695	525.6	700	529.5	705	533.8	710	537.9
Open-circuit voltage — V_{oc} (V)	47.88	45.4	48.08	45.6	48.27	45.8	48.46	46	48.65	46.2
Short-circuit current — I_{sc} (A)	18.25	14.68	18.28	14.7	18.32	14.74	18.36	14.77	18.4	14.8
Maximum power voltage — V_{mp} (V)	40.12	37.6	40.32	37.8	40.51	38	40.69	38.2	40.88	38.4
Maximum power current — I_{mp} (A)	17.2	13.87	17.24	13.91	17.28	13.94	17.33	13.98	17.37	14.01
Module efficiency	22.21		22.37		22.53		22.7		22.86	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5, Flash test tolerance +4 %

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Total power Pmax/W	793.50	799.25	805.00	810.75	816.50
Vmp / V (Total)	40.12	40.32	40.51	40.69	40.88
Imp / A (Total)	19.78	19.82	19.87	19.93	19.97
Voc / V (Total)	47.88	48.08	48.27	48.46	48.65
Isc / A (Total)	20.99	21.02	21.07	21.11	21.16

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2384x1303x35mm
Weight	38.3kg
Cell	132 cells, N type Monocrystalline 105x210mm
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68, 3 bypass diodes
Output wire	4mm ²
Wire length	300mm/1300mm/customized
Connector	MC4 Compatible
Packing Specification	31 pcs/Pallet; 558 pcs/40' HQ

OPERATING PARAMETERS

Power tolerance (W)	(0~+4)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85°C
Mechanical load	5400 Pa / 2400 Pa

TEMPERATURE RATINGS

Temperature coefficient (P_{max})	-0.30% / °C
Temperature coefficient (V_{oc})	-0.25% / °C
Temperature coefficient (I_{sc})	0.045% / °C
Nominal operating cell temperature	45±2 °C

MODULE DIMENSIONS (MM)

