

M10-MBB TOPCon Mono Bifacial Module

(144 Half Cells)



12 years Product warranty | 30 years Linear power warranty

Founder's in Solar PV since 1993, in manufacturing and systems integration,

560-580W /Output power



PID Resistant

Strict selection of encapsulation materials eliminates PID risk.

22.50% /Maximum efficiency



Better Performance

30-year linear warranty, 1% decline in the first year an average annual decline of 0.40% over the first 30 years, increased return on investment No Boron-oxygen LID (Light Induced Degradation).

0~+5W /Power tolerance



High Returns

The n-type module has lower annual attenuation, better photoelectric conversion efficiency and temperature coefficient benefit, bifaciality can reach 80%.

Comprehensive product certification

- IEC 61215 IEC61730
- IEC TS 62804 (PID Resistant)
- IEC 62716 (Ammonia Corrosion)
- IEC 61701 (Salt Spray Corrosion)
- IEC TS 62941 (PV quality Management System)
- ISO9001:2015 (Quality Management System)
- ISO14001 (Environmental Management System)
- OHSAS18001 (Occupational Health and Safety Management System)



Multi Busbar Technology

Better light utilization and current collection ability, effectively improve the power output and reliability.

Our PEM Reputed partner's
From CHINA, Taiwan, India,
Turkey, Vietnam & Thailand.
MBC Solar Stands for
Quality & Reliability.



Suitable for



Certification



IEC 62804 (PID) | IEC 61701 (Salt Mist) | IEC 61726 (Ammonia)

IEC 62782 (DMLT) | IEC 61853-1 & 2 (Panfile & IAM) | IEC 60068 (Sand & Dust)

IEC 61215 | INMETRO, CE | IEC 61730 | UL 61730


Clean and Green Energy for the Society.

M10-MBB TOPCon Mono Bifacial Module


Model of PV Module

Power Range
560-580W


PV module dimensions (mm)

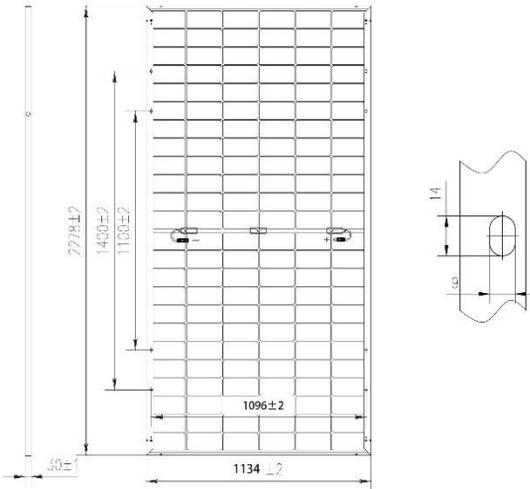

P-V Curves of PV Module

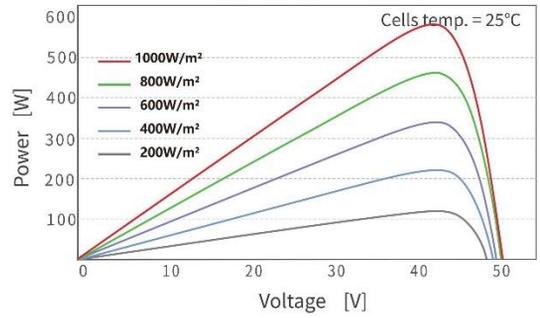

I-V Curves of PV Module

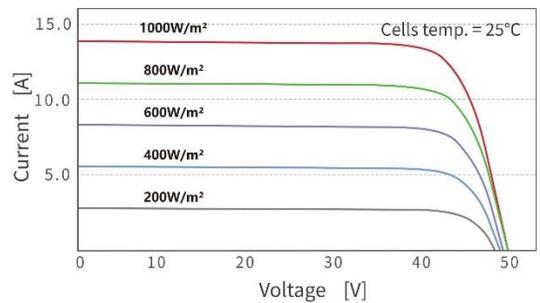

Electrical Parameter(STC)

Model	560T	565T	570T	575T	580T
Maximum power (W)	560	565	570	575	580
Working point voltage (V)	42.26	42.48	42.70	42.91	43.12
Working point current (A)	13.25	13.30	13.35	13.40	13.45
Open circuit voltage (V)	50.65	50.80	50.95	51.10	51.25
Short circuit current (A)	14.18	14.25	14.32	14.39	14.46
PV module efficiency	21.88%	21.87%	22.07%	22.26%	22.45%
Standard test conditions	AM1.5, Irradiance 1000w/m ² , Cell Temperature 25°C				

RearSide Power gain

5%	Maximum Power	588Wp	593Wp	598Wp	603Wp	609Wp
	Efficiency STC	22.78%	22.99%	23.19%	23.39%	23.59%
15%	Maximum Power	644Wp	650Wp	656Wp	661Wp	667Wp
	Efficiency STC	24.95%	25.17%	25.40%	25.62%	25.84%
25%	Maximum Power	700Wp	706Wp	713Wp	719Wp	725Wp
	Efficiency STC	27.12%	27.36%	27.61%	27.85%	28.09%

The Electrical performance parameters are neither just referred to one PV panel, nor are a part of the contract; They are only used as reference.

Mechanical Parameters

Module size	2278*1134*30mm
Number of solar cells	144Cells (2*6*12)
Weight	31Kg ±5%
Junction Box	IP68, 3 diodes
Cables	4mm ² , +300mm/-200mm (Customizable)
Front plate glass	2.0mm, Ultra white AR coated semi-toughened glass
Rear plate glass	2.0mm, semi-toughened glass
Static load on the front	5400Pa
Static load on the back	2400Pa

Packaging&Transport

40'HQ container transport 36 Pcs/box × 20 box = 720 Pcs

Temperature Parameter Maximum Ratings

NMOT	42 ± 2°C	Working temperature	-40~+85°C
Temperature coefficient of maximum power(Pmax)	-0.30%/°C	Maximum system voltage	1500VDC
Temperature coefficient of open circuit voltage(Voc)	-0.25%/°C	Maximum fuse rated current	30A
Temperature coefficient of short circuit current(Isc)	+0.045%/°C		

MBC Solar Panels Deliver Performance Guaranteed through our OEM Partners.

Energize Society By Sustainable Energy Solutions

