




Product Parameters

Product Components	Double glass 3.2mm+ battery pack+3.2mm
Battery type	Monocrystalline Silicon
Appearance size	1370mmx430mm
Effective size	1338mmx376mm
weight/piece	10kg
Quantity/m ²	2pcs/m ²
Max rated power(Pmax)	90W±3%
Operating voltage(vmpp)	14.43V
Operating Current(lmpp)	6.28A
Open circuit voltage (Voc)	17.36V±3%
short-circuit current(Isc)	6.24A±4%
Operating Temperature	-45°C ~ 85°C

Product color

The color can be customized

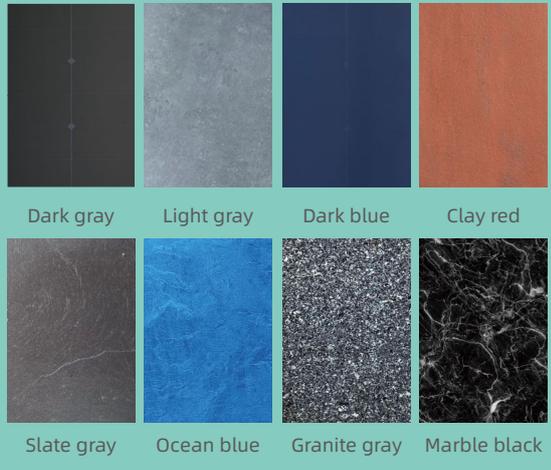

KVS02-晶固



Safety and Reliable
Positive impact resistance
Adapt to extreme weather conditions

Green energy
High conversion efficiency
Provide sustainable energy

Special Design
Similar to natural clay tiles
Have antique looking, good for roof renovation.

Easy installation
Standard installation mode
Matched traditional clay roofing