

### Product Parameters

Product Components	Double glass 3.2mm+ battery pack+3.2mm
Battery type	Monocrystalline Silicon
Appearance size	1127mmx400mm
Effective size	1127mmx370mm
weight/piece	7.53kg
Quantity/m <sup>2</sup>	2.4pcs/m <sup>2</sup>
Max rated power(Pmax)	78W±3%
Operating voltage(vmpp)	7.47V
Operating Current(lmpp)	10.45A
Open circuit voltage (Voc)	8.95V±3%
short-circuit current(Isc)	11.07A±4%
Operating Temperature	-45°C ~ 85°C

### Product color

The color can be customized



Dark gray

Light gray

Dark blue

Clay red




Slate gray

Ocean blue

Granite gray

Marble black

## KVS04-晶耀

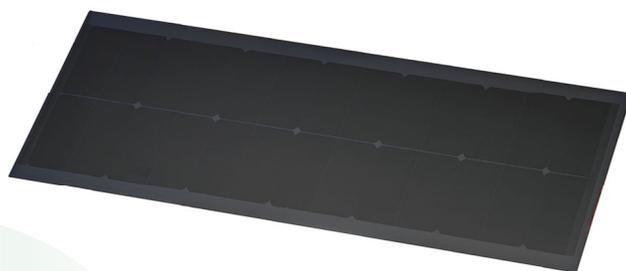

### Safety and Reliable

Positive impact resistance  
Adapt to extreme weather conditions

### Green energy

High conversion efficiency  
Provide sustainable energy

### Low cost, High effective

Reduce building costs  
Solar can be widely used

### Waterproof design

Sealing strip at the overlap  
Double waterproof :  
Concealed water channel  
+ rubber strip



+86 18910125288(Mr. Li)  
+86 13918414663(Ms. Liu)



Lizhi@kunvosolar.com  
Ramona@kunvosolar.com



Room 1801, Tower 1C, Wangjing  
Soho,10 Wangjing Street, Chaoyang  
District, Beijing, P.R.C



www.kunvosolar.com