


MOUNTING RAIL **DIRECT**

1.1kN minimum uplift
resistance per screw.

Its low profile is ideal for keeping
the modules flush to the roof.

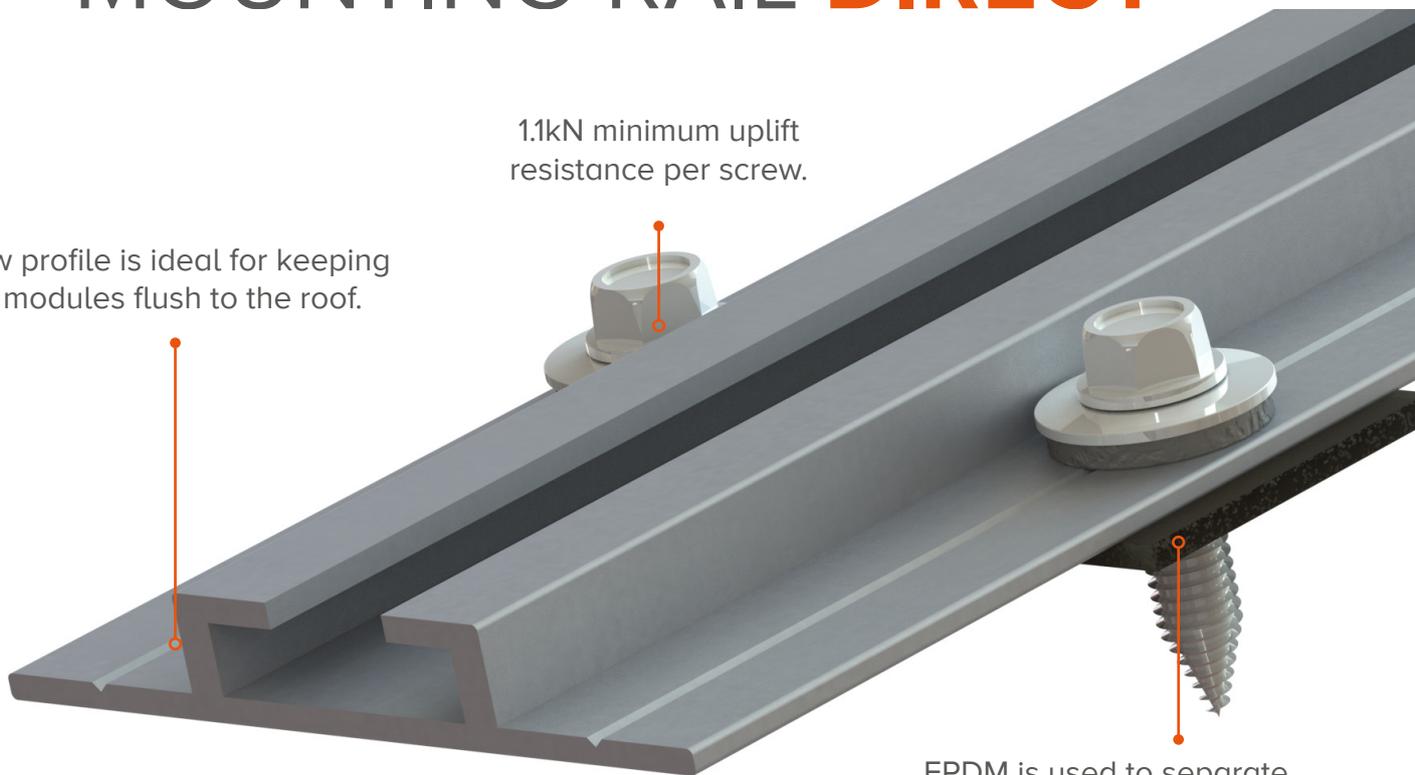

EPDM is used to separate
materials and to provide a
weatherproof seal.



1.10kg/m²
Weight

0.48mm^{steel} 0.63mm^{aluminium}
Min. profile thickness

1°-45°
Suitable roof pitch

Portrait & landscape
Module orientation

Aluminium, stainless steel & EPDM
Material

+44 (0) 1451 824 312
info@sunfixings.co.uk
R3 Bourton Industrial Park, Bourton on the Water, Cheltenham, Glos, GL54 2HQ, UK

WWW.SUNFIXINGS.CO.UK
V042018

