

## LFP Series Brief Introduce

LFP Series rechargeable LiFePO<sub>4</sub> Battery Pack for Replace VRLA Battery are ideal applications to RVS, solar energy, boats, and power equipment. These lithium batteries offer a safe and lightweight solution, with higher efficiency, longer lifespan, and deep discharge capabilities compared to traditional sealed lead-acid batteries. Designed with advanced LiFePO<sub>4</sub> technology, they provide benefits such as temperature protection and superior recharge and discharge efficiency. Just a little higher costs, these batteries are more cost-effective in the long term due to their extended life span. LFP Series LiFePO<sub>4</sub> batteries provide a reliable and worry-free energy solution for a range of applications.

Long Life

Lithium Iron Phosphate


Deep Cycle



## Applications

- Solar Energy Storage System
- Wind Energy Power System
- UPS, Backup Power
- Telecommunication
- Electric Vehicles, Electric Mobility
- Lighting
- Medical Equipment

## Dimensions & Weight

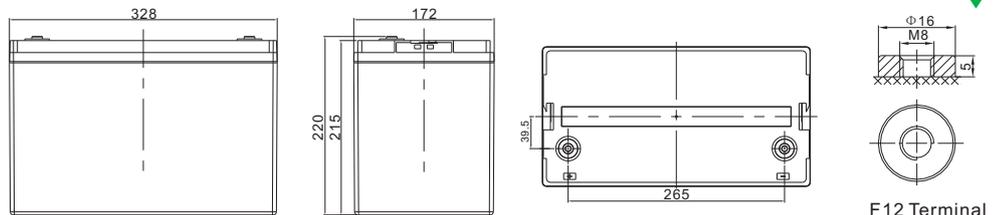

- Length: 330 ± 1mm Width: 172 ± 1mm Height: 215 ± 1mm Total Height: 220 ± 1mm
- Weight: 11.5 ± 0.1kgs



## Technical Specifications

<b>Electrical Characteristics</b>	Nominal Voltage	12.8V
	Nominal Capacity	100Ah
	Energy	1280Wh
	Terminal	M8
	Cycle Life	> 6000cycles @80% DOD
	Months Self Discharge	< 3%
	Efficiency of Charge	100% @0.2C
<b>Standard Charge</b>	Efficiency of Discharge	96 ~ 99% @0.5C
	Charge Voltage	14.6-15.2V
	Charge Mode	0.2C to 13.6V, then 13.6V, charge current to 0.02C(CC/CV)
	Charge Current	20A
	Max. Charge Current	100A
<b>Standard Discharge</b>	Charge Cut-off Voltage	14.6V ± 0.2
	Continuous Current	50A
	Max continuous discharge current	100A
<b>Environmental</b>	Discharge Cut-off Voltage	10V
	Charge Temperature	0 °C to 45 °C (32 F to 113 F) @60 ± 25 % Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140 F) @60 ± 25 % Relative Humidity
	Storage Temperature	0 °C to 40 °C (32 F to 104 F) @60 ± 25 % Relative Humidity
<b>Mechanical</b>	Water Dust Resistance	IP21 (IP65 OPT)
	Cell & Method	Prismatic Cell, 4S1P
	Plastic Case	ABS
	Dimensions (in./mm.)	330*172*215mm/13*6.77*8.47Ins
	Weight (lbs./kg.)	Approx: 11.5kgs/25.35lbs
	Gravimetric specific energy	111.3WH/KG
	Bluetooth (optional)	/
LCD display (optional)	/	


**Note:** All above information shall be changed without prior notice, CSSUN reserves the right to explain and update the latest information. Welcome contact CSSUN for the latest information.

## BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Cell Voltage balance function
- Short detection function

## Performance Characteristics (Data test from 4 Series Cell)


### Different Rate Discharge Curve (25°C)

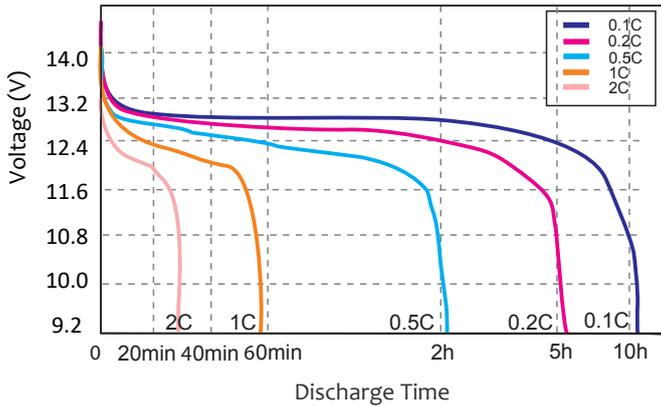


### Different Temperature Discharge Curve At 0.5c

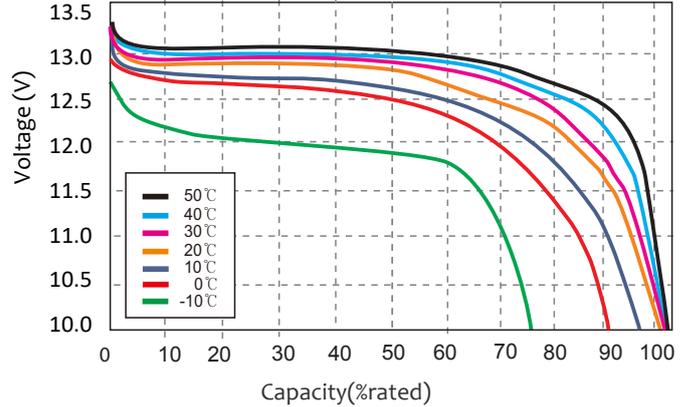


### State Of Charge Curve At 0.5c (25°C)

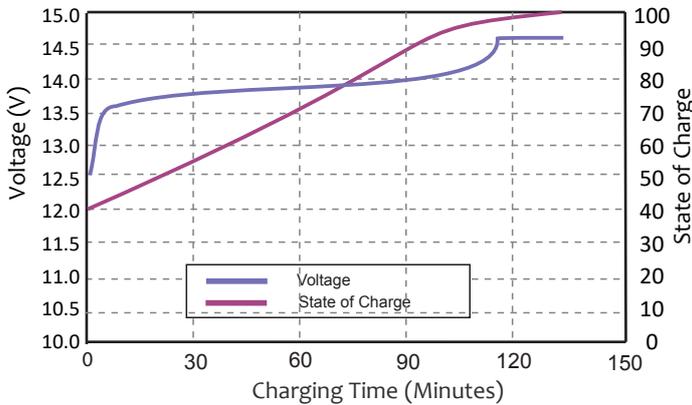


### Charging Characteristics At 0.5c (25°C)

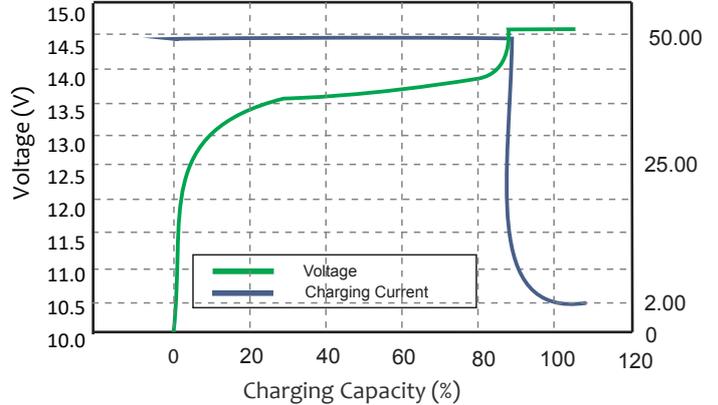

### Cycle Life Curve At 1c According DoD

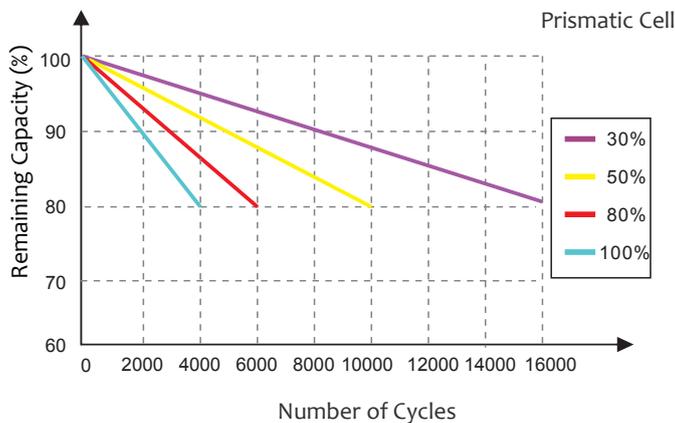

### Self Discharge Characteristics Curve

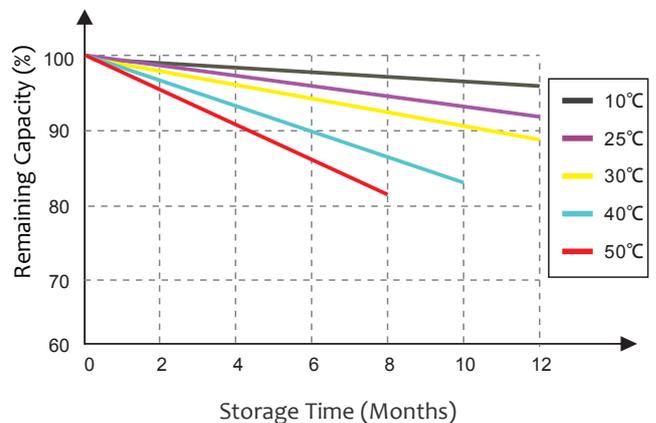

**SAFETY WARNING :** Use only within the allowed parameters. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. Do not use the battery if you suspect it may be faulty or damaged.

Add: Introduction Building, Xingdong Industry Park, Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-29123661 email: sales@cssun.net , support@cssun.net  
 website: www.cssun.net