

Solargiga Energy

GiGa 3

JMPV-TV2/66-655~670(R)

MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

Maximum Power	Maximum Efficiency	Power Tolerance
670W	21.6%	0~+5W



CELL TYPE

P Type/MBB/Monocrystalline/Half-Cell



HIGH EFFICIENCY, HIGH GENERATION

Using bifacial PERC cell technology, absorbs the reflected and scattered light in the environment effectively, gain 5-25% more energy.



EXCELLENT ANTI-PID PERFORMANCE

Cell manufacturing technology optimization and materials control will help reduce PID degradation rate to the minimum.



SUPPORT 1500V SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.



STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.

IEC 61215 / IEC 61730

IEC 62804: Anti-PID Test

IEC 61701: Salt Spray Test

IEC 62716: Ammonia Corrosion Test


IEC 60068-2-68 : Dust and Sand Test

12 YEARS

Product Warranty

30 YEARS

Power Output Warranty

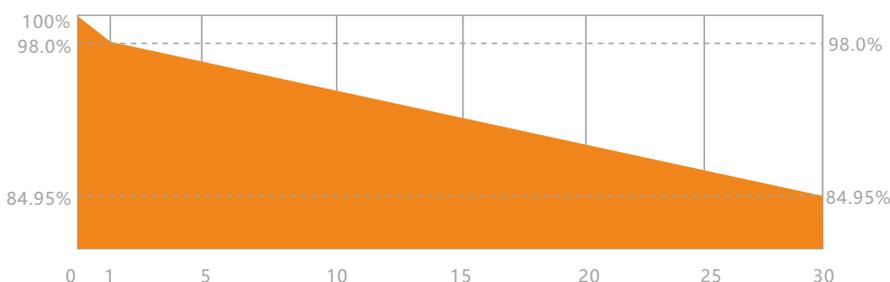

PICC

ADDITIONAL PREMIUM INSURANCE SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ('Solargiga Energy', HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.

MBB MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE JMPV-TV2/66-655~670(R)

MODEL NUMBER	JMPV-TV2/66-655~670(R)			
ELECTRICAL PARAMETERS (STC)				
Max Power (Pmax/W)	655	660	665	670
Max Power Voltage(Vmp/V)	38.22	38.29	38.40	38.49
Max Power Current (Imp/A)	17.14	17.24	17.32	17.41
Open Circuit Voltage(Voc/V)	45.08	45.22	45.31	45.43
Short Circuit Current (Isc/A)	18.59	18.67	18.77	18.86
Module Efficiency (%)	21.1	21.3	21.4	21.6

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m, Cell Temperature 25°C

ELECTRICAL PARAMETERS (NMOT)				
Max Power (Pmax/W)	489.06	492.87	496.40	500.02
Max Power Voltage(Vmp/V)	35.62	35.69	35.79	35.87
Max Power Current (Imp/A)	13.73	13.81	13.87	13.94
Open Circuit Voltage(Voc/V)	42.16	42.29	42.37	42.49
Short Circuit Current (Isc/A)	15.01	15.07	15.15	15.23

NMOT(Nominal Module Operating Temperature): Irradiance 800W/m, Ambient Temperature 20°C, Wind Speed 1m/s

BIFACIAL GENERATION DATA (670W FOR EXAMPLE)				
Power Gain	5%	15%	25%	
Maximum Power (W)	703.59	770.57	837.54	
Module Efficiency (%)	22.7	24.8	27.0	
Max Power Voltage(Vmp/V)	38.49	38.49	38.49	
Max Power Current(Imp/A)	18.28	20.02	21.76	
Open Circuit Voltage(Voc/V)	45.43	45.43	45.43	
Short Circuit Current(Isc/A)	19.80	21.69	23.58	

Bifacial generation varies relying on albedo, height from ground, interval etc. Below data are for reference only.





TEMPERATURE CHARACTERISTICS	
Cell Operating Temperature	45±2°C
Temperature Coefficient of Isc	0.042%/°C
Temperature Coefficient of Voc	-0.254%/°C
Temperature Coefficient of Pmax	-0.341%/°C

MECHANICAL PARAMETERS			
Cell Type	P Type/MBB/Monocrystalline/Half-Cell		
Number of Cells	132(6×11×2)		
Weight	37.5±1kg		
Dimension	2384×1303×33mm		
Front Glass	Semi-tempered embossed coated glass	Frame	Anodized Aluminum
Encapsulating Material	EVA/POE	Junction Box	Protection degree IP68
Back Glass	Semi-tempered embossed/high-reflection	Cable	4.0 mm ² / + 350mm, - 250mm; or customized length

OPERATING CONDITIONS			
Maximum System Voltage	1500V	Max Front Face Static Load (Snow etc)	5400Pa
Operating Temperature	-40°C~+85°C	Max Rear Face Static Load (Wind etc)	2400Pa
Maximum Series Fuse Rating	35A	Installation should strictly obey the installation manual of Solargiga Energy	

PACKING INFORMATION	
33pcs/pallet	594pcs/40'HQ

*Power test uncertainty +/-3%

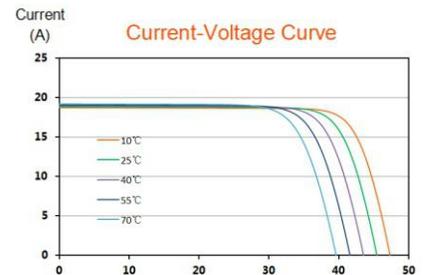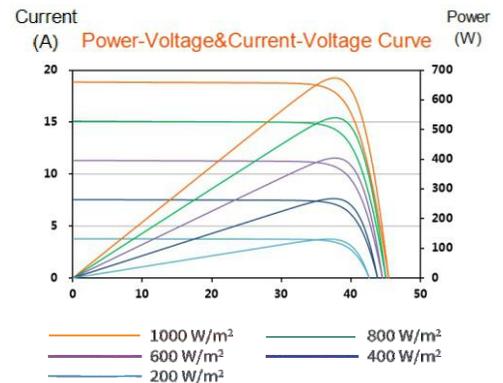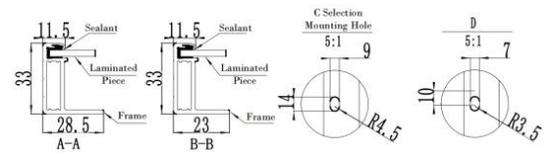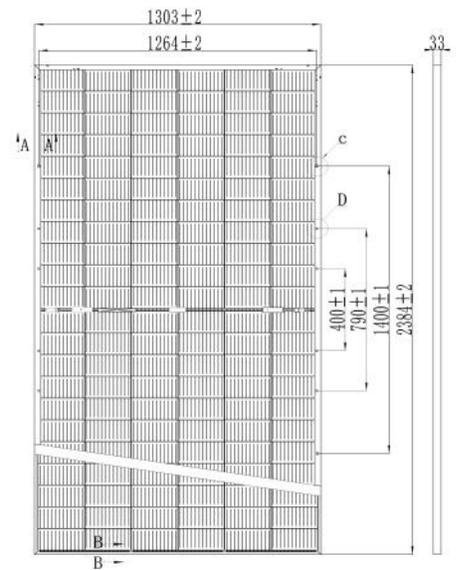

Sales HOT-line : +86 0416 508 1599
E-mail : sales@jz.solargiga.com
Xihai Industry Park, Economic and
Technical Development Zone,
Jinzhou, Liaoning Province, China.

Note: Electrical parameters are only used for comparison between different types of modules. Due to product innovation, Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.

