


# ALUMINUM GROUND MOUNTING

**\*Horizontal Row**



1. LS-P5050

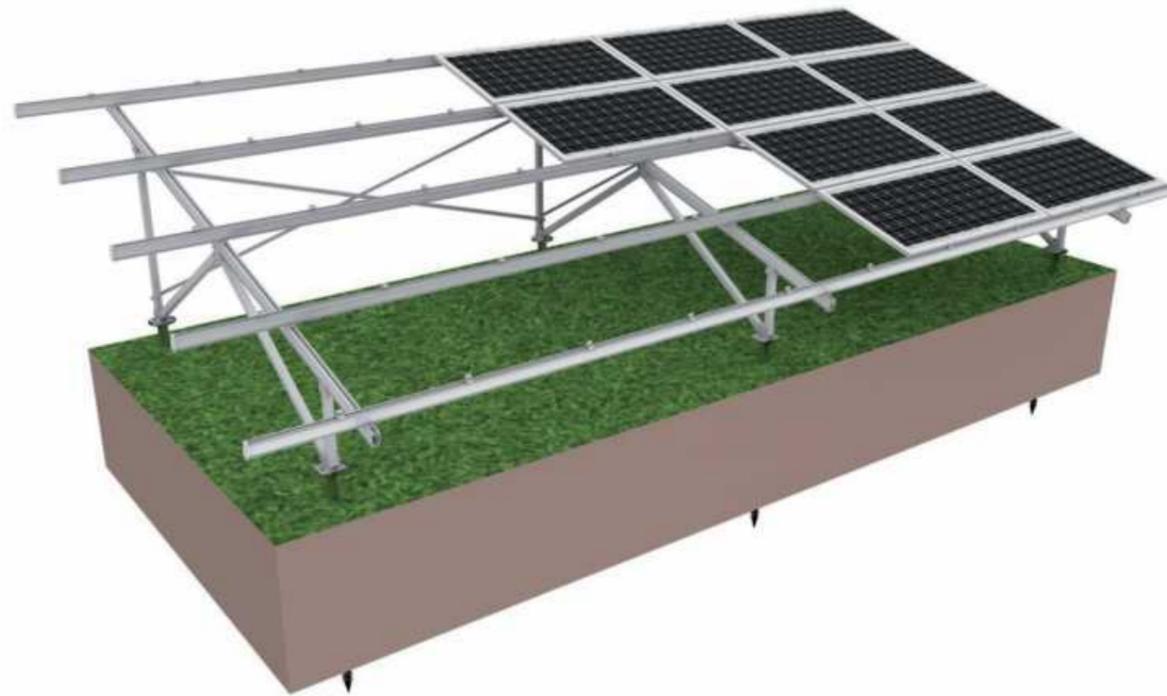

2. LS-MC



3. LS-ECS



4. LS-ICS



5. LS-GPB-V




6. LS-JCR



7. LS-HGC

**\*Single pile ground mounting**

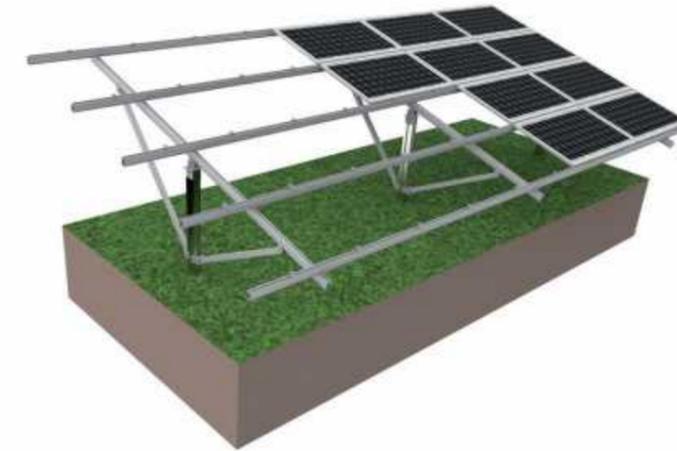

1. LS-DG



2. LS-MC



3. LS-ECS



4. LS-ICS



5. LS-GPB



6. LS-ZDJ



7. LS-CP

Technical Features:	
Compliance	AS/NZS1170.2, Euro Code 8, DIN 1055, IBC 2006
Material	High-strength aluminum 6005-T5, stainless steel SUS304
Snow Load Rating	1.4KN/m <sup>2</sup>
Max Wind Speed	60m/s
Certificates	CE, SGS
Warranty	10 years
Installation Angle	0-60°