








MBB PERC BIFACIAL MODULE

665W-670W-675W



- **MBB PERC BIFACIAL MODULE**
High Performance Half-Cut Cells
With Transparent Backsheet
Photovoltaic Modules

● KEY FEATURES

-  MBB 1/2 Cut Bifacial Cell Technology
-  Lower Risk Of HotSpot
-  Higher Power Output
-  High Snow (5400Pa) and Wind Loads (2400Pa)
-  Triple EL Inspection
-  Excellent Low Light Performance
-  Excellent PID Resistance

● LINEAR HIGH PERFORMANCE GUARANTEED

12 Years Product Warranty on **91.95%** of the Nominal Performance

25 Years Linear Power Output Warranty on **84.80%** of the Nominal Performance



According to Ifri-sol product and performance warranty

● CERTIFICATIONS

Management system TÜV-Certified
 ISO 9001:2015: ID 011001317684
 ISO 14001: 2015: ID 011041317684
 ISO 45001:2018: ID 011131815622



Electrical Specification

Module Type	Nominal Power P _{mp}	Nominal Voltage U _{mp}	Nominal Current I _{mp}	Open Circuit Voltage (U _{oc})	Short Circuit Current (I _{sc})	Module Conversion Efficiency
IF-HTM665-132	665 Wp	38.67 V	17.26 A	46.34 V	18.12 A	21.41%
IF-HTM670-132	670 Wp	38.80 V	17.28 A	46.47 V	18.13 A	21.57%
IF-HTM675-132	675 Wp	39.00 V	17.31 A	46.60 V	18.15 A	21.73%

Electrical Data At STC (STANDARD TEST CONDITIONS): 1000W/m² Irradiance, 25°C Cell Temperature, AM1.5 Spectrum According to EN 60904-3. Manufacturing Tolerance (P_{max},V_{oc},I_{sc}) : ±3%

NMOT

Module Type	Nominal Power P _{mp}	Nominal Voltage U _{mp}	Nominal Current I _{mp}	Open Circuit Voltage (U _{oc})	Short Circuit Current (I _{sc})
IF-HTM665-132	498.79 Wp	36.12 V	13.80 A	42.70 V	14.49 A
IF-HTM670-132	501.07 Wp	36.24 V	13.82 A	42.82 V	14.50 A
IF-HTM675-132	504.50 Wp	36.43 V	13.84 A	42.94 V	14.52 A

Electrical Data At NMOT: 800W/m² Irradiance, 20°C Ambient Temperature, 1m/s Wind Speed. Manufacturing Tolerance (P_{max},V_{oc},I_{sc}) : ±3%

Design

Front Glass	3.2mm High transmission Low Iron Tempered Glass AR Coated
Encapsulant	Ethylene Vinyl Acetate (E.V.A)
Cell	MBB PERC Bifacial /210 mm X 105mm - 132Pcs
Backside	Transparent Composite Film
Frame	35 mm Anodized Aluminum Alloy Type 6005-T6 (Silver/Black)

Temperature Coefficients

voltage U _{oc} (β)	-0.26%/°C
Current I _{sc} (α)	+0.05%/°C
Output Power(γ)	-0.34%/°C
NMOT	43±2°C



Operating conditions

Maximum System Voltage	1500 VDC
Maximum Series Fuse	30 A
Operating Temperature Range	From -40°C to 85°C
Mechanical Load test (Front/Back)	5400Pa/2400Pa

Power Connection


Junction Box	3xIP68 Junction Box With Bypass Diodes
Solar Cable	Length 350mm, 4mm ² Prefabricated with Latching Type Connectors
Safety Class	Class II (According to IEC 61140)

Technical drawing

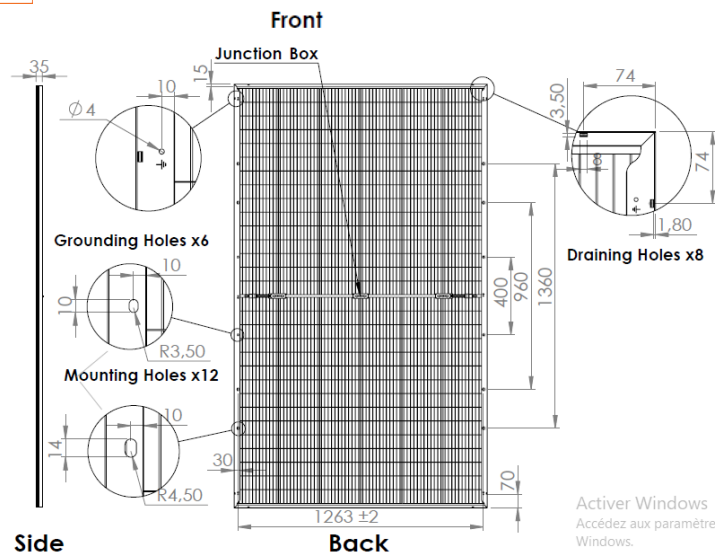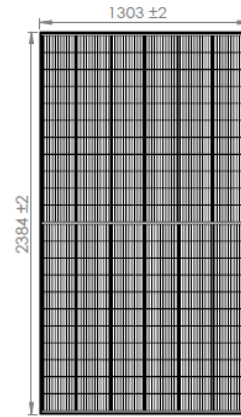

Activer Windows
Accédez aux paramètres
Windows.

Current-Voltage/Power-Voltage Curves, IF-HTM675-132

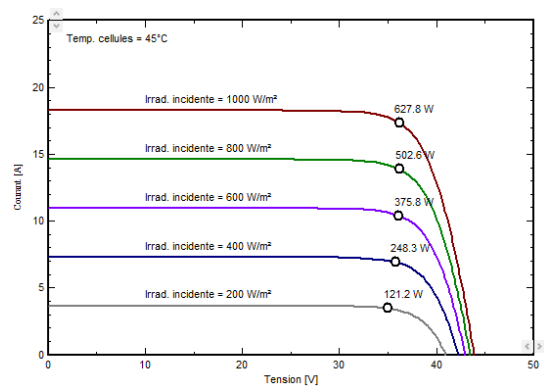

Mechanical Specification

Dimensions (LxWxH)	2384mm x 1303 mm x 35 mm (±2mm)
Weight	35 Kg

Packaging specification

Dimensions (LxWxH)	1325mm x 1150mm x 2524mm	Modules Qty per Carton	31	Modules Qty per Container 40' HC	558
--------------------	--------------------------	------------------------	----	----------------------------------	-----