


WRS-72M

POWER RANGE

385W~410W

CELL FEATURE

158.75*158.75, 22.60%

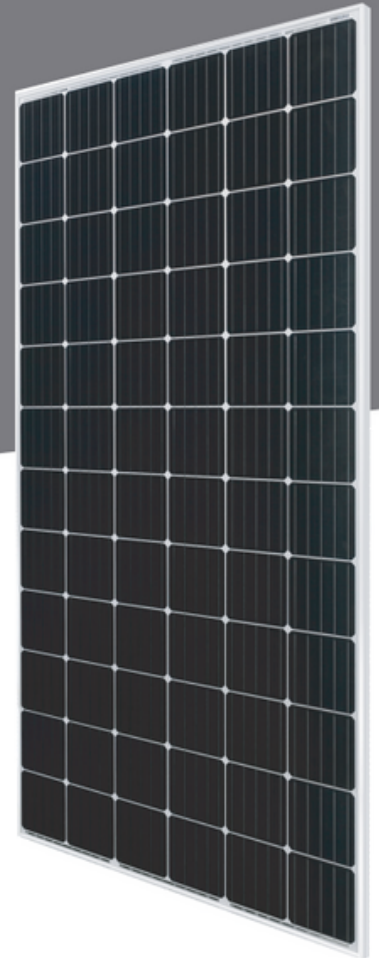


JUNCTION BOX

High waterproof rating
Protection Degree: IP67
Safety Class: Class II
Rated Voltage: 1500V

FRAME

Strong mechanical load
resistance up to 5400 Pa
Anodic oxidation layer resistant
to chemical corrosion
Available in silver and black



5BB



9BB



MBB CELLS

More uniform current collection reduces the current loss of the cell inside panels



Anti-reflective glass

Increases the light absorption, and reduces the power loss caused by the self-cleaning in rain.



Excellent performance in low irradiance

Enable solar panels to generate electricity in the morning, cloudy and rainy days.



PID Resistant


Perfect resistance against PID (Potential Induced Degradation) to secure your investment.

QUALIFICATIONS AND CERTIFICATES



·IEC61215 / · IEC61730

WARRANTY

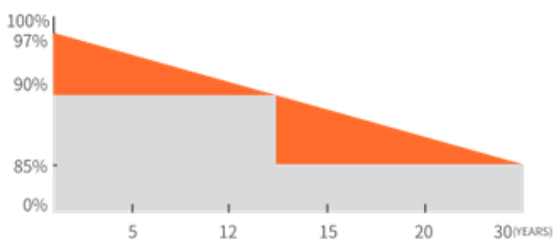


12 YEARS

Guarantee on product material and workmanship

30 YEARS

Linear Power output warranty

PV DRAWINGS

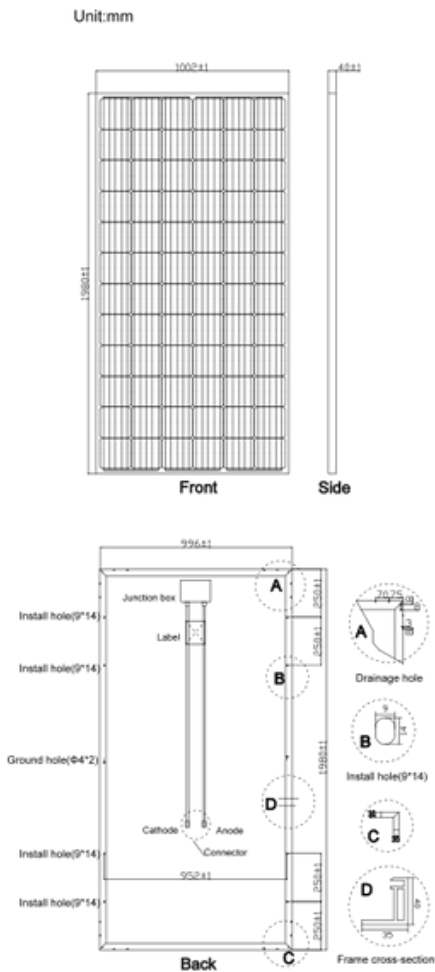

ELECTRICAL DATA (STC)

Model Type	WRS 390-36-M	WRS 395-36-M	WRS 400-36-M	WRS 405-36-M	WRS 410-36-M
Peak Power(Pmax)	390.00	395.00	400.00	405.00	410.00
Maximum Power Voltage(Vmp)	39.22	39.32	39.42	39.52	39.62
Maximum Power Current(Imp)	9.95	10.05	10.15	10.25	10.35
Open Circuit Voltage(Voc)	48.04	48.17	48.29	48.41	48.53
Short Circuit Current(Isc)	10.48	10.58	10.69	10.79	10.90
Cells Efficiency(%)	21.50	21.77	22.05	22.33	22.60
Module Efficiency(%)	19.65	19.90	20.16	20.41	20.66

* STC: irradiance 1000 W/m², AM 1.5, and cell temperature of 25°C

ELECTRICAL DATA (NOCT)



Model Type	WRS 390-36-M	WRS 395-36-M	WRS 400-36-M	WRS 405-36-M	WRS 410-36-M
Peak Power(Pmax)	290.00	293.00	297.00	301.00	304.00
Maximum Power Voltage(Vmp)	36.67	36.76	36.86	36.95	37.04
Maximum Power Current(Imp)	7.91	7.98	8.06	8.15	8.21
Open Circuit Voltage(Voc)	45.18	45.29	45.41	45.52	45.63
Short Circuit Current(Isc)	8.38	8.46	8.54	8.64	8.70

* NOCT: irradiance 800 W/m², AM 1.5, ambient temperature 20°C, wind speed 1 m/s

TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500/1000
Maximum Series Fuse Rating (A)	20
Power Tolerance	0~+3 %
Pmax Temperature Coefficients (W/°C)	-0.400 %
Voc Temperature Coefficient2s (V/°C)	-0.290 %
Isc Temperature Coefficients (A/°C)	+0.048 %
NOCT Nominal Operating Cell Temperature (°C)	45±2
Operating and Storage Temperature (°C)	-40~+85

IV CURVE

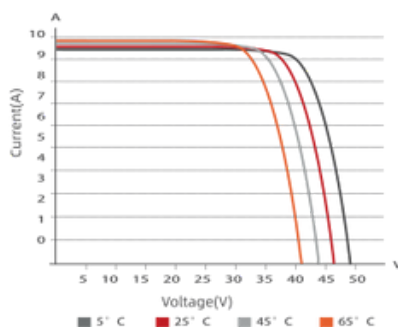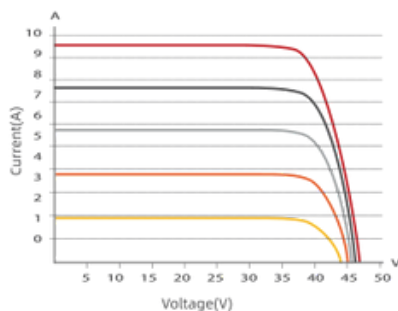

MECHANICAL CHARACTERISTICS

Cell Type	158.75x158.75 Mono
No. of Cells	72 (6x12)
Dimensions	1980x1002x40mm
Weight	22.60kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65/IP67
Output cables	4mm ² cable 90cm+mc4
MaxWind Load/Snow Load	2400Pa/5400Pa

PACKING WAY

20FT container	10 Packages/270pcs
40HQ containe	22 Packages/660pcs

WARIS ENERGY SRL

Italy- Via di Vittorio, 19, 38068, Rovereto (TN)
 Germany- Im Speitel 9, 76229, Karlsruhe
 Turkey- Mimarisan OSB. 15. Can No:8, Melikgazi

EMAIL: info@waris-energy.com

Tel: 0039 -0464-973892