




GKA182M144
530W-550W

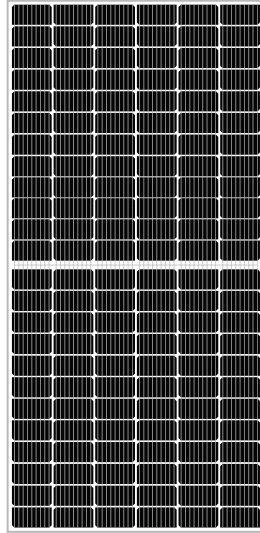

GKA182M144S
STANDARD

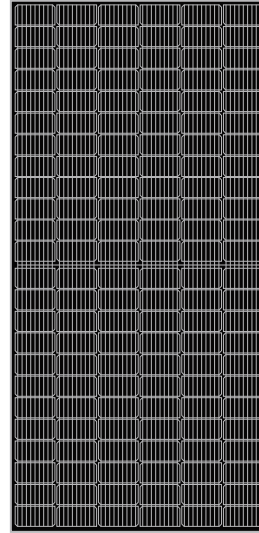

GKA182M144BK
BLACK VERSION

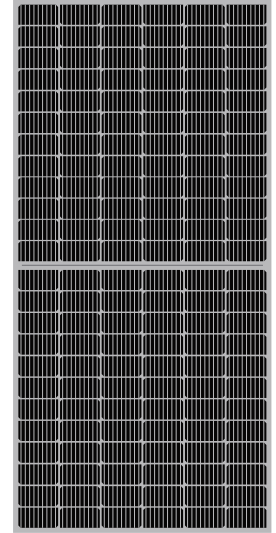


GKA182M144BF
BIFACIAL

KEY FEATURES

- M Busbar Solar Cell**
M Busbar Solar Cell design improves module efficiency and offers better aesthetic appearance for rooftop installation.
- High Efficiency:**
Higher module conversion efficiency (up to 21.28%) benefit from Passivated Emmitter Rear Contact (PERC) technology.
- PID Resistance:**
Excellent Anti-PID performance guarantee limited power degradation for mass production.

- Low-light Performance:**
Advanced glass and cell surface textured design ensure excellent performance in low-light environment.
- Severe Weather Resilience:**
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS:**
High salt mist and ammonia resistance certified.

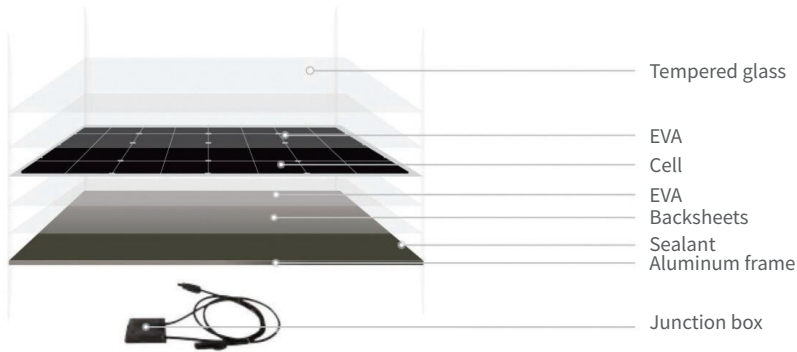


★ **GAMKO SOLAR MODULE BOM**

- CELLS:** TIER 1 BRANDS SOLAR CELLS
- TEMPERED GLASS:** ULTRA-CLEAR
- EVA:** TRANSPARENCY > 93%
- BACKSHEETS:** REFLECTIVITY > 80%, TPT
- JUNCTION BOX:** IP68 MAX 30A
- SILICON GEL:** UV, AGING-RESISTANT
- FRAME:** ANODIZED ALUMINUM 6005-T5

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty · 30 Year Linear Power Warranty

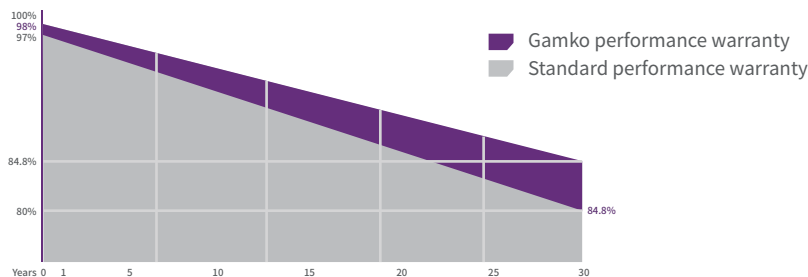

★ **GAMKO QUALITY CONTROL**

- ◆ 2 EL testing avoid cells cracking of each solar module.
- ◆ 2 Power flash testing avoid false welding and insufficient power of each module.
- ◆ Packing tightly with angle protection avoid transportation broken.
- ◆ Gamko official Warranty cover all Gamko solar module 30 years.

GKA182M144
530W-550W



SPECIFICATION

	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(P _{max})	530W	401W	535W	405W	540W	409W	545W	413W	550W	417W
Open Circuit Voltage (V _{oc})	49.74V	47.16V	49.89V	47.40V	50.04V	47.63V	50.18V	47.87V	50.32V	48.10V
Short Circuit Current (I _{sc})	13.62A	10.91A	13.69A	10.95A	13.76A	10.99A	13.83A	11.03A	13.90A	11.07A
Voltage at Maximum Power (V _{mpp})	41.63V	38.97V	41.80V	39.21V	41.96V	39.44V	42.12V	39.67V	42.28V	39.90V
Current at Maximum Power (I _{mp})	12.73A	10.29A	12.80A	10.33A	12.87A	10.37A	12.94A	10.41A	13.01A	10.45A
Module Efficiency STC (%)	20.51%		20.70%		20.89%		21.09%		21.28%	

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%, P_{max} According Gamko's official testing.
NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%, P_{max} According Gamko's official testing.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power(P _{max})	557W	562W	567W	572W	578W
	Module Efficiency STC (%)	21.53%	21.74%	21.94%	22.14%	22.35%
15%	Maximum power (P _{max})	610W	615W	621W	627W	633W
	Module Efficiency STC (%)	23.58%	23.81%	24.03%	24.25%	24.47%
25%	Maximum Power(P _{max})	663W	669W	675W	681W	688W
	Module Efficiency STC (%)	25.63%	25.88%	26.12%	26.36%	26.60%

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline PERC 182*91mm
Number of cells	144(6x24)
Module dimensions	2279*1134*30MM
Weight	25kg
Front cover	3.2mm coated tempered glass
Frame	Anodized aluminum alloy
Junction box	IP68 rated (3 by pass diodes)
Cable	4mm ² (0.006inches ²),Portrait: 300mm(11.8inches);
Connector	PV compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P _{max}	-0.36%/°C
Temperature Coefficients of V _{oc}	-0.28%/°C
Temperature Coefficients of I _{sc}	-0.05%/°C


PACKAGING

Standard packaging	36pcs/pallet
Module quantity per 20' container	325pcs
Module quantity per 40' container	720pcs(HQ)

ENGINEERING DRAWINGS

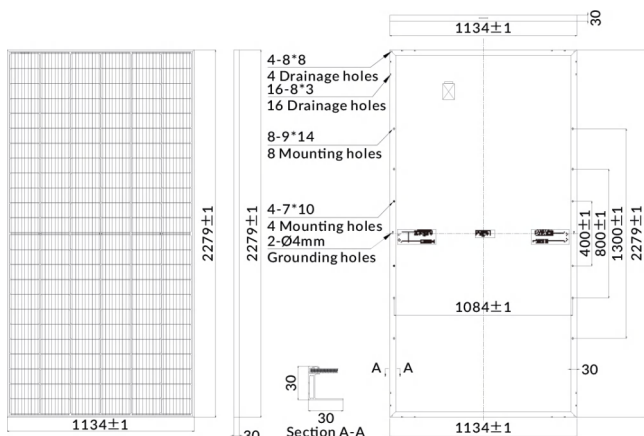

Electrical Performance & Temperature Dependence

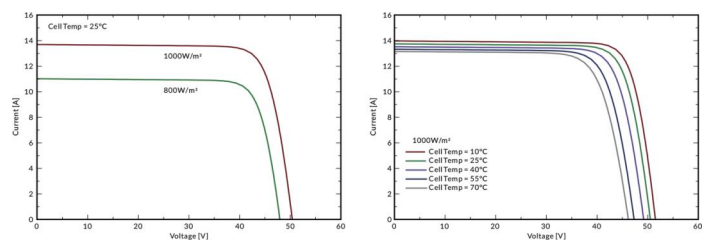

Specifications included in this datasheet are subject to change without notice.