

TRITEC

ENERGY FOR A BETTER WORLD

TRI-STAND

The smart insertion system for PV systems on tiled roof.

- simple
- aesthetic
- efficient

The main advantages:

- Floating rooftop system, therefore no thermal separation necessary
- Simple, quick and efficient installation
- Considerable time and thus cost saving
- Optimum load distribution and stability
- Suitable for all common framed solar modules


www.tritec-energy.com

TRI-STAND FOR TILED ROOF

This way you easily increase your efficiency

Realize your projects in an unbeatably short time: The smart planning software, the few components and the patented SafeClick assembly enable an extremely quick, safe and simple installation of the PV insertion system TRI-STAND on the roof. The PV modules are easily inserted into the insertion profiles and are held in place by their own weight. Additional fastening of the modules is completely unnecessary.

TRI-STAND is installed in just a few steps

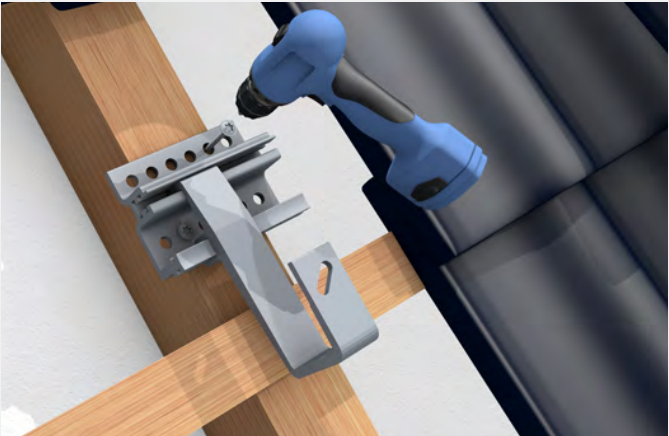


1. Mounting the roof hook
After checking the substructure of the roof for its point load bearing capacity, the roof hooks are mounted according to the design plan.



2. Mounting the vertical base profile (UP-L)
The pre-assembled profiles are then securely installed on the roof hooks with the M10 hammerhead screw.



3. Clicking the TS insert profiles into the SafeClick
The insertion profiles are clicked into the SafeClick and are floatingly connected to the roof. Damage to the roof and module caused by thermal expansion is thus avoided.

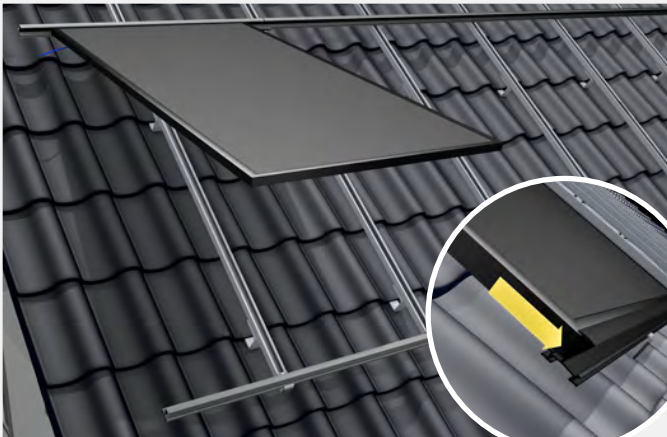



















4. Inserting the modules into the TS insertion profiles
The modules are inserted into the insertion profiles and are held in place by their own weight - there is no need for additional fastening.

THE SYSTEM COMPONENTS

Extremely fast assembly with few components

With TRITEC you have the choice: Many components of the PV insertion system TRI-STAND are available in the color selection „blank“ (aluminum silver) and „black“. Completely tailored to your needs: The profiles and variants marked with * are available in different lengths on request.


 TRI-STAND insertion profile, blank Standard • Variants: TS-30/32/35/38/40 • available in different lengths*	 TRI-STAND insertion profile, black Standard • Variants: TS-30/32/35/38/40 • available in different lengths*	 TRI-STAND end profile, blank Optional • Variants: TS-30/32/35/40 • available in different lengths*	 TRI-STAND end profile, black Optional • Variants: TS-30/32/35/40 • available in different lengths*
 TRI-STAND universal profile UP-L 3,70 m, blank Standard • Item no.: 1503168 • other lengths on request*	 TRI-STAND universal profile UP-L 3,70 m, black Standard • Item no.: 1503169 • other lengths on request*	 TRI-STAND SafeClick-Torx, blank Standard • Item no.: 1502870	 TRI-STAND SafeClick-Torx, black Standard • Item no.: 1502963
 TRI-STAND insertion profile connector TS-C, blank Standard • Item no.: 1502216	 TRI-STAND insertion profile connector TS-C, black Standard • Item no.: 1502417	 TRI-STAND end bracket TS-E, blank Standard • Item no.: 1502214	 TRI-STAND end bracket TS-E, black Standard • Item no.: 1502307
 TRI-STAND universal profile connector UP-C Standard • pre-assembled incl. screws • Item no.: 1502217	 TRI-STAND roof hook BASIC Standard • Item no.: 1503094	 TRI-STAND roof hook BASIC adjustable Standard • Item no.: 1503146	 TRI-STAND roof hook PLUS Standard • Bracket, Item no.: 1502982 • Plate 40/28, Item no.: 1502983 • Plate 49/37, Item no.: 1502984 • Plate 55/43, Item no.: 1502985
 TRI-STAND Edge Clip cable fixation Accessories Item no.: 1502246	 TRI-STAND end cap for UP-L profile, black Accessories • Item no.: 1502865	 TRI-STAND hammer head bolt M10x30 A2, with locking nut Accessories • Screw, Item no.: 1502255 • Locking nut, Item no.: 1502254	

* Information on lengths and part numbers on request

LEARN MORE

Videos, planning and contact

TRITEC

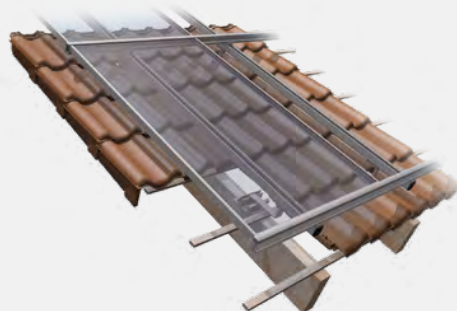

Simply scan the QR code or visit the following link to get more information about TRI-STAND for tiled roof, such as installation video, installation instructions and references.

www.tritec-energy.com/en/pv-mounting-systems/tiled-roof/



Just scan the QR code or visit the following link to watch the training video on our TRI-DESIGN planning software.

www.tritec-energy.com/en/training/tri-design-basic/

The optimal mounting solution for every roof

TRITEC mounting systems combine over 30 years of photovoltaic experience. Our own products TRI-STAND, TRI-ROOF+, TRI-CLIP and TRI-FLAT Easyspeed offer optimum PV mounting solutions for the various requirements of different roof types and alignments. We attach great importance to the high-quality processing of the components as well as to the durability of the substructure.

Further information and the download of the assembly instructions you will find on our homepage www.tritec-energy.com.

Or just talk to us directly. Our experts are at your disposal to answer all your questions.

Contact

info@tritec-energy.com
www.tritec-energy.com