



Better Solar

PowerLine Commercial GSP6-60

German engineered, PowerLine modules are designed and built to achieve top quality performance, maximize energy production and ensure long-lasting durability. Each PowerLine module is assembled with our automated manufacturing processes. And the PowerLine surpasses strict in-house and independent testing, guaranteeing the high level of quality our engineers stand behind.

Highlights

- Up to 4.99 W more module performance because of positive classes
- Flash data for every panel
- 12-year product warranty
- 25-year linear performance warranty
- Potential induced degradation (PID) Free
- Effective hotspot-prevention processes ensure durability
- More power due to better power tolerance: $\pm 3\%$
- Improved water and snow runoff with chamfered frame drainage and snow runoff
- Better performance in diffused sunlight and high temperature
- High ammonia and salt mist resistance certified
- Glass with anti-reflective coating
- Individual testing and surveying, quality assurance by permanent production control incl. EL-test
- UV stabilized, aesthetically pleasing black anodized frame
- Best price-performance ratio

Built-in durability

GermanSolar only uses cell materials from leading premium cell manufacturers. To eliminate the possibility of hotspot formation thoroughly, strict control-criteria mandate a thermal picture of each cell before and after processing.

Positive classes: (-0/+4.99)

All GermanSolar modules are positively classed. Each PowerLine module is up to 4.99 Wp above its rated power. So no matter what PowerLine module you choose, you are guaranteed up to 4.99 Wp more.

25-year linear performance warranty

Our 25-year linear performance warranty covers for power loss less than 3% in the first year and only 0.35% degradation per year thereafter.




Description


Item	Module Type GSP6 250/255/260/265/270W					
Electrical parameters at STC						
Maximum Power	Pmax(W)	250W	255W	260W	265W	270W
Power Tolerance	W	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Tolerance	(%)	±3%	±3%	±3%	±3%	±3%
Open Circuit Voltage	Voc(V)	37.5	37.8	38	38.3	38.5
Short Circuit Current	Isc(A)	8.85	8.95	9.01	9.2	9.31
Maximum Power Voltage	Vmpp(V)	30.10	30.50	30.70	30.89	31.11
Maximum Power Current	Imp(A)	8.31	8.39	8.42	8.47	8.57
Module Efficiency	(%)	15.3	15.6	15.9	16.2	16.5
Solar Cell Efficiency	(%)	17.4	17.7	18.1	18.4	18.7
STC: Irradiance 1000W/m ² , Cell temperature 25°C, AM1.5						
Electrical parameters at NOCT						
Maximum Power	Pmax(W)	187W	191W	194W	197W	201W
Open Circuit Voltage	Voc(V)	34.5	34.8	35.0	35.3	35.6
Short Circuit Current	Isc(A)	7.04	7.15	7.22	7.36	7.45
Maximum Power Voltage	Vmpp(V)	28.2	28.5	28.8	29.1	29.4
Maximum Power Current	Imp(A)	6.63	6.68	6.73	6.79	6.85
NOCT: Irradiance 800W/m ² , Ambient temperature 20°C, Wind speed 1 m/s						
Mechanical Characteristics						
Cell Type	(mm)	156 x 156(Poly-Crystalline Silicon)				
Number of Cells	(Pcs)	60				
Maximum System Voltage	(V)	DC1000				
Temp. Coeff of Voc	(%/K)	-0.33%/K				
Temp. Coeff of Isc	(%/K)	+0.05%/K				
Temp. Coeff. Of Pmax	(%/K)	-0.43%/K				
Operating Temperature	(°C)	-40°C to +85°C				
Nominal Operating Cell Temperature	(°C)	45±2				
Max Series Fuse	(A)	15				
Insulation	(MΩ)	50				
Wind Bearing	(Pa)	≤5400				
Pressure Bearing	(Pa)	≤2400				

NOCT**	45°C ±2°C
Module efficiency reduction at 200 W/m ² ***	-0.6 (±0.3)% abs
Max. System Voltage	1000 V DC
IP Protection Level	IP 65
Module Technology	Glass-Foil Laminate with anodized aluminum frame
Module Design	Cover material: Solar glass with antireflection surface treatment, 0.13 in (3.2mm); Encapsulation: EVA-Solar Cells -EVA; Back material
No. and Type of Solar Cells	60 crystalline solar cells 6.14 x 6.14 in (156 x 156 mm) 0.007 in ± 1.18 x 103 (180 um ± 30 μm)
Cables	Junction box with MC4 connectors, cables: 2 x 3.28 ft/0.006 in2 (2 x 1 m/4 mm ²)
Junction Box	IP 67 rated, with 3 bypass diodes
Dimensions (LxWxH)	64.56 x 39.05 x 1.57 in (1640 x 992 x 40mm)
Weight	40.8 lbs/ 18.5 kg
Operating Temperature Range	-40 ... +185°F (-40 ... +85°C)
Ambient Temperature Range	-40 ... +113°F (-40 ... +45°C)
Mechanical Ratings	Suction pressure and load of 50 lb/ft ² (2400 Pa) approved (Wind speed 81 mph (130 km/h) with safety factor 3), load of 5400 Pa approved
Certification	IEC 61215 : 2005 IEC 61730 -1/-2 : 2004 IEC 61701 : 1995 (salt mist resistant) DLG Focus Test (ammonia resistant) UL 1703 approved ETL UL 1703 : Type 1 Fire-Rating Fire Class: C FSEC listing UNI 9177 Class 1 EN 13501- 1 Class E
Positive Sorting	-0 Wp / +4.99 Wp
Pallet Dimensions in weight / size	1177.3 lbs (66.93 x 44.49 x 45.28) inches 26 modules per pallet
Module Qty per Container	728pcs/40'HQ
Product Warranty	12 years
Performance Warranty	25 years, according to the Warranty Conditions of GermanSolar Linear Warranty

I-V Curves

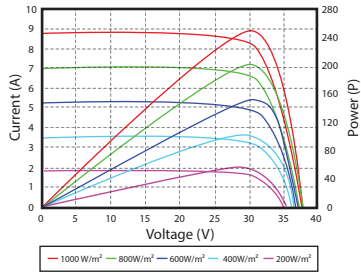


Current-Voltage and Power-Voltage Curves at Different Irradiances



Current-Voltage Curves at Different Temperatures

PHYSICAL CHARACTERISTICS Unit: mm

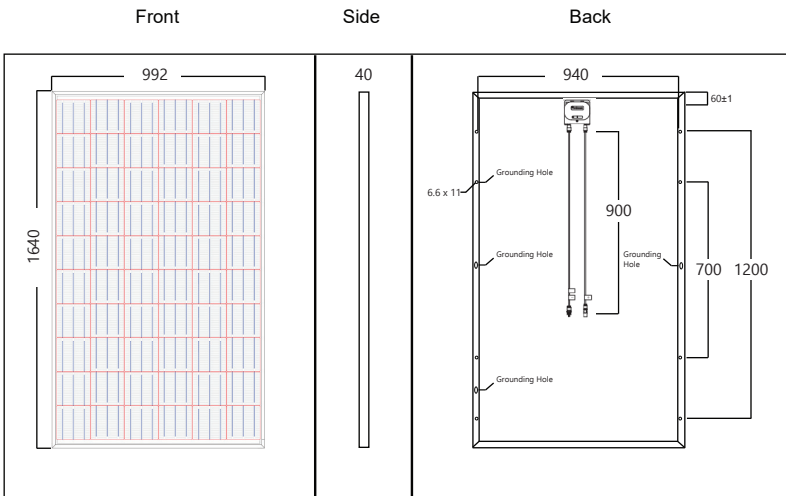

25-Year Linear Performance Warranty

