




A BRITISH BRAND OF HIGH QUALITY SOLAR MODULES

UKSOL solar PV modules are always produced with the latest high quality grade A solar cells to deliver the maximum return on your investment. Every UKSOL solar module comes with a British 12 year product warranty and a 30 year performance warranty. Technical and warranty support is provided by our dedicated customer care team based near London.

UKSOL UKS-6P30 POLYCRYSTALLINE MODULE 265-285w



ADVANCED PERFORMANCE & PROVEN ADVANTAGES



High module conversion efficiency up to 17.52% through advanced manufacturing technology.



Low degradation and excellent performance under high temperature and low light conditions.



Robust aluminum frame ensures the modules withstand wind loads up to 2400Pa and snow loads up to 5400Pa.



Positive power tolerance of 0 ~ +3 %. High ammonia and salt mist resistance.



PID Free. Fire tested. Risk free procurement and support from the UK.



Fully automated production | Special AR gloss coating 5 bus bars for best performance

QUALITY CERTIFICATES



TUV Sud tested IEC61215, IEC61730, IEC62716, IEC61701, TUV Sud tested. FIDE Mexico approved. Chile approved. Retie (Colombia). Salt spray and ammonia tested. SONCAP certificate for Nigeria. MCS certified. Intertek testing for Kenya, Nigeria and Mali

BRITISH WARRANTIES




12 year product warranty.



Limited power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.



ISO9001:2008: Quality management system ISO14001:2004: Environmental management system OHSAS18001:2007: Occupational health and safety management system

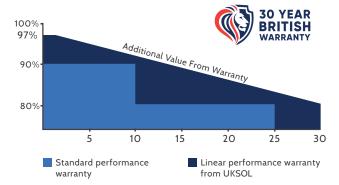







BRITISH QUALITY "A" CELLS STANDARDS





ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (Pmax)	260W	265W	270W	275W	280W	285W
Open Circuit Voltage (Voc)	38.2V	38.3V	38.4V	38.5V	38.8V	38.7V
Short Circuit Current (lsc)	8.90A	8.98A	9.09A	9.20A	9.37A	9.42A
Voltage at Nominal Power (Vmp)	30.7V	30.9V	31.1V	31.3V	31.6V	31.7V
Current at Nominal Power (Imp)	8.47A	8.58A	8.69A	8.79A	8.87A	9.00A
Module Efficiency (%)	15.98	16.29	16.60	16.90	17.21	17.52

Operating Temperature -40°C to +85°C

Maximum System Voltage 1000V DC

Fire Resistance Rating Type 1 (UL 1703)/Class C (IEC61730)

Maximum Series Fuse Rating 15A

STC: Irradiance IOOOW/m², Cell Temperature 25°C, Air Mass 1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (Pmax)	191W	195W	199W	202W	206W	210W
Open Circuit Voltage (Voc)	35.2V	35.3V	35.4V	35.5V	35.6V	35.7V
Short Circuit Current (Isc)	7.21A	7.27A	7.36A	7.45A	7.54A	7.63A
Voltage at Nominal Power (Vmp)	27.9V	28.1V	28.3V	28.5V	28.7V	28.9V
Current at Nominal Power (Imp)	6.85A	6.94A	7.04A	7.09A	7.18A	7.27A

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell Type	Polycrystalline 156x156mm (6x6 inches)
Number of Cells	60 (6x10)
Module Dimensions	1640x992x35mm (64.57x39.06x1.38 inches)
Weight	17.5kg
Front Cover	3.2mm (0.13 inches) low-iron tempered Glass
Frame	Anodized
Junction Box	IP67/IP68, 3 diodes, according to IEC60529
Cable	4mm², 1000 mm
Connector	MC4 or MC4 Compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C + 2°C
Temperature Coefficient Of Pmax	-0.41% / °C
Temperature Coefficient Of Voc	-0.31% / °C
Temperature Coefficient Of Isc	0.05% / °C


PACKAGING

Standard Packaging	30 pcs / Pallet
Module Quantity per 20' Container	360pcs
Module Quantity per 40' Container	924 HQ


ENGINEERING DRAWINGS

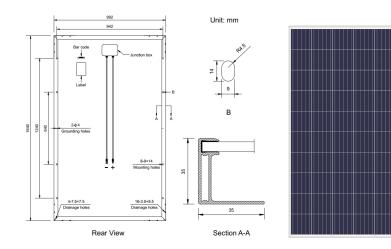


IV CURVES



Current-Voltage & Power-Voltage Curves At Different Irradiances



Current-Voltage Curves At Different Temperatures



Also available in all-black.